


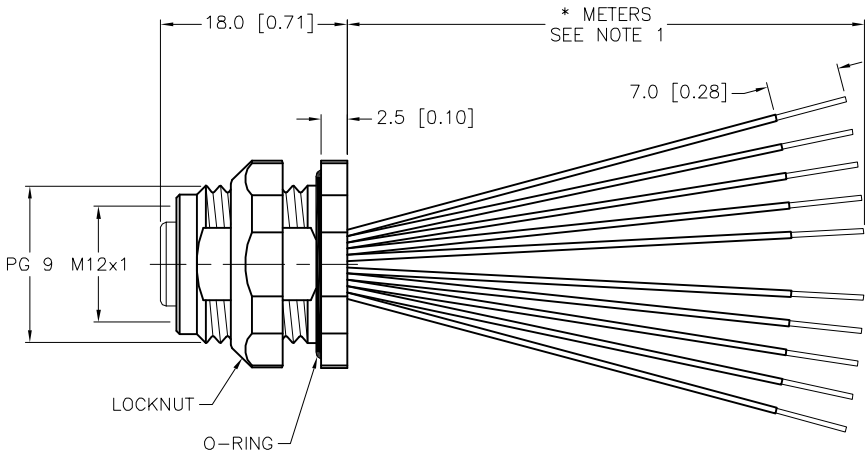


FEMALE END VIEW		TYPICAL PANEL CUTOUT	SPECIFICATIONS																					
 1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GRAY 6 = PINK 7 = BLUE 8 = RED 9 = ORANGE 10 = TAN 11 = N/C 12 = N/C 		<table><tr><td>CONTACT CARRIER MATERIAL/COLOR</td><td>TPV/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>HOUSING, LOCKNUT MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>O-RING MATERIAL</td><td>NITRILE</td></tr><tr><td>RATED CURRENT [A]</td><td>2.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>30 V</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>10x24 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP68</td></tr><tr><td>MAX. PANEL THICKNESS</td><td>3.0 [0.12]</td></tr></table>	CONTACT CARRIER MATERIAL/COLOR	TPV/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	HOUSING, LOCKNUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	O-RING MATERIAL	NITRILE	RATED CURRENT [A]	2.0 A	RATED VOLTAGE [V]	30 V	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	10x24 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68	MAX. PANEL THICKNESS	3.0 [0.12]
CONTACT CARRIER MATERIAL/COLOR	TPV/BLACK																							
CONTACT MATERIAL/PLATING	BRASS/GOLD																							
HOUSING, LOCKNUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																							
O-RING MATERIAL	NITRILE																							
RATED CURRENT [A]	2.0 A																							
RATED VOLTAGE [V]	30 V																							
CONDUCTOR INSULATION MATERIAL	PVC																							
NUMBER OF CONDUCTORS [AWG]	10x24 AWG																							
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																							
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68																							
MAX. PANEL THICKNESS	3.0 [0.12]																							

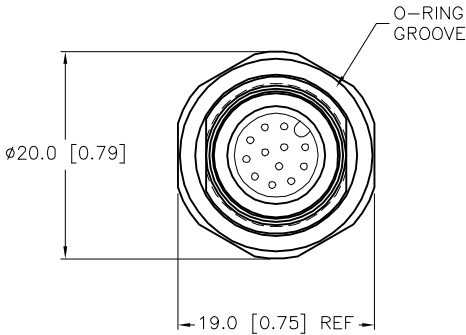


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							TURCK			
MATERIAL					DRFT RWC		DATE 09/17/07		DESCRIPTION	
SEE SPECIFICATIONS					APVD		SCALE 1=.8		WD-FKFDV 10-*	
FINISH					UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		C	
					DO NOT SCALE THIS DRAWING		FILE: 777019088		SHEET 1 OF 1	

C	UPDATE VOLTAGE RATING	CBM	02/21/23	78300
REV	DESCRIPTION	BY	DATE	ECO. NO.