


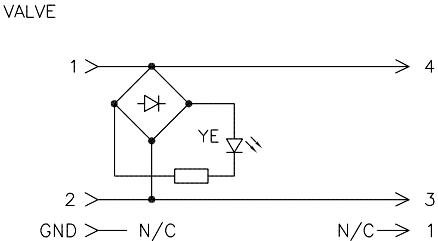
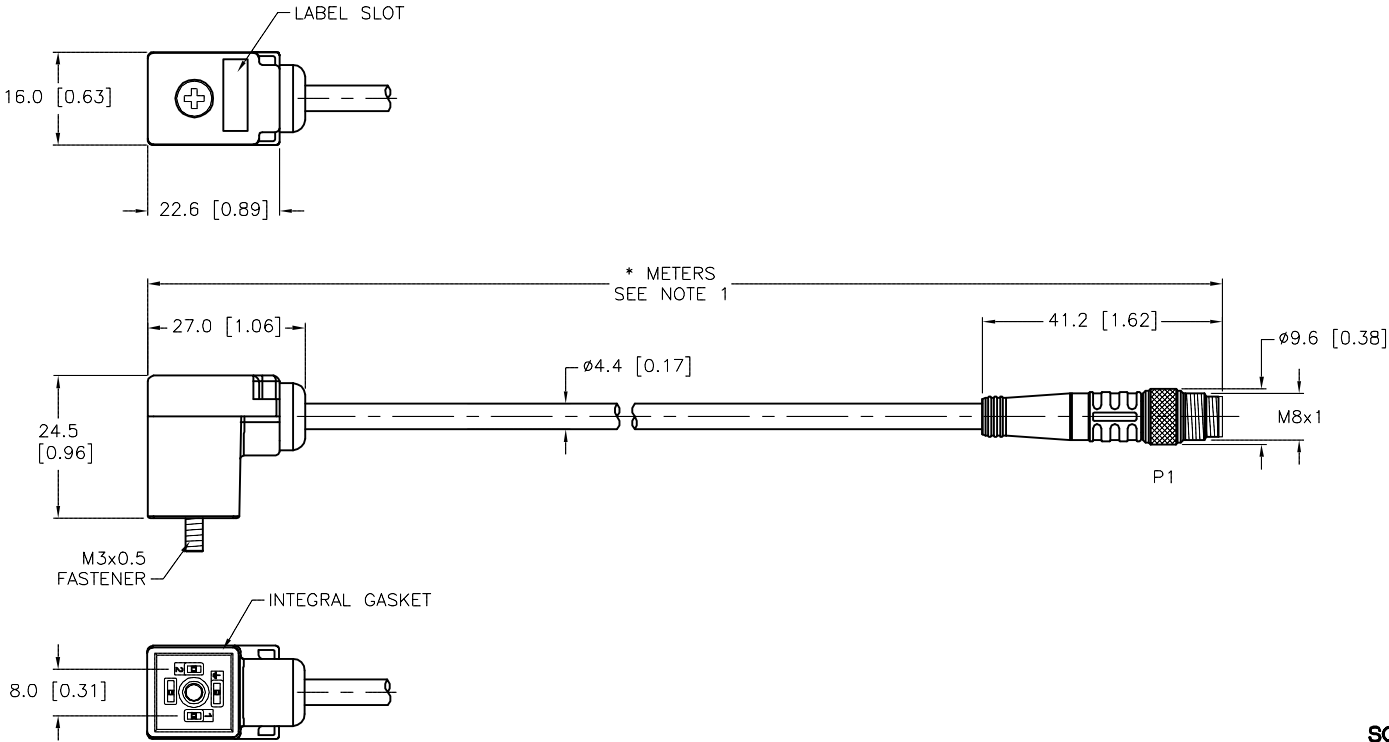


VALVE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 <p>1 = BROWN 2 = BLUE GND = BLACK</p>	 <p>1 = N/C 3 = BLUE 4 = BROWN</p> 	 <p>VALVE</p> <p>P1</p> <p>GND > N/C</p> <p>N/C > 1</p>	CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK (VALVE), YELLOW (P1)
			CONTACT MATERIAL/PLATING (VALVE)	BRASS/SILVER
			CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	24 VAC/VDC
			OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMER OF CONDUCTORS [AWG]	3x24 AWG
			OPERATING TEMPERATURE	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67




CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1."*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.							DRFT RDS		DATE 09/06/07	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.3	
SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS					MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		TC8S 2-L642-*M-PSG 3M	
									IDENTIFICATION NO.	
									REV	
									F	
F	UPDATE VALVE END VIEW	RDS	09/04/13	43350					FILE: 777019208	
REV	DESCRIPTION	BY	DATE	ECO NO.					SHEET 1 OF 1	