






MALE END VIEW		FEMALE END VIEW		SPECIFICATIONS																									
																													
<div><div>1 = VIOLET 2 = RED 3 = GREY 4 = RED/BLUE 5 = GREEN 6 = BLUE 7 = GREY/PINK 8 = WHITE/GREEN 9 = WHITE/YELLOW 10 = WHITE/GREY 11 = BLACK 12 = GREEN/YELLOW 13 = YELLOW/BROWN 14 = BROWN/GREEN 15 = WHITE 16 = YELLOW 17 = PINK 18 = GREY/BROWN 19 = BROWN</div><div> M23 connector</div></div>		<div><div>1 = VIOLET 2 = RED 3 = GREY 4 = RED/BLUE 5 = GREEN 6 = BLUE 7 = GREY/PINK 8 = WHITE/GREEN 9 = WHITE/YELLOW 10 = WHITE/GREY 11 = BLACK 12 = GREEN/YELLOW 13 = YELLOW/BROWN 14 = BROWN/GREEN 15 = WHITE 16 = YELLOW 17 = PINK 18 = GREY/BROWN 19 = BROWN</div><div> M23 connector</div></div>		<table><tr><td>CONTACT CARRIER MATERIAL/COLOR</td><td>NYLON or PBT/GREY</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>9.0 A (18 AWG), 2.0 A (22 AWG)</td></tr><tr><td>RATED VOLTAGE [V]</td><td>150 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>SR-PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>3x18 AWG/16x22 AWG</td></tr><tr><td>DRAIN/SHIELD</td><td>20 AWG/ALUM.-POLYESTER FOIL SHIELD</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>IEC IP67</td></tr></table>		CONTACT CARRIER MATERIAL/COLOR	NYLON or PBT/GREY	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	9.0 A (18 AWG), 2.0 A (22 AWG)	RATED VOLTAGE [V]	150 V	OUTER JACKET MATERIAL/COLOR	PVC/BLACK	CONDUCTOR INSULATION MATERIAL	SR-PVC	NUMBER OF CONDUCTORS [AWG]	3x18 AWG/16x22 AWG	DRAIN/SHIELD	20 AWG/ALUM.-POLYESTER FOIL SHIELD	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	IEC IP67
CONTACT CARRIER MATERIAL/COLOR	NYLON or PBT/GREY																												
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK																												
CONTACT MATERIAL/PLATING	BRASS/GOLD																												
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																												
RATED CURRENT [A]	9.0 A (18 AWG), 2.0 A (22 AWG)																												
RATED VOLTAGE [V]	150 V																												
OUTER JACKET MATERIAL/COLOR	PVC/BLACK																												
CONDUCTOR INSULATION MATERIAL	SR-PVC																												
NUMBER OF CONDUCTORS [AWG]	3x18 AWG/16x22 AWG																												
DRAIN/SHIELD	20 AWG/ALUM.-POLYESTER FOIL SHIELD																												
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																												
PROTECTION CLASS	IEC IP67																												

- 1 = VIOLET
 2 = RED
 3 = GREY
 4 = RED/BLUE
 5 = GREEN
 6 = BLUE
 7 = GREY/PINK
 8 = WHITE/GREEN
 9 = WHITE/YELLOW
 10 = WHITE/GREY
 11 = BLACK
 12 = GREEN/YELLOW
 13 = YELLOW/BROWN
 14 = BROWN/GREEN
 15 = WHITE
 16 = YELLOW
 17 = PINK
 18 = GREY/BROWN
 19 = BROWN



CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

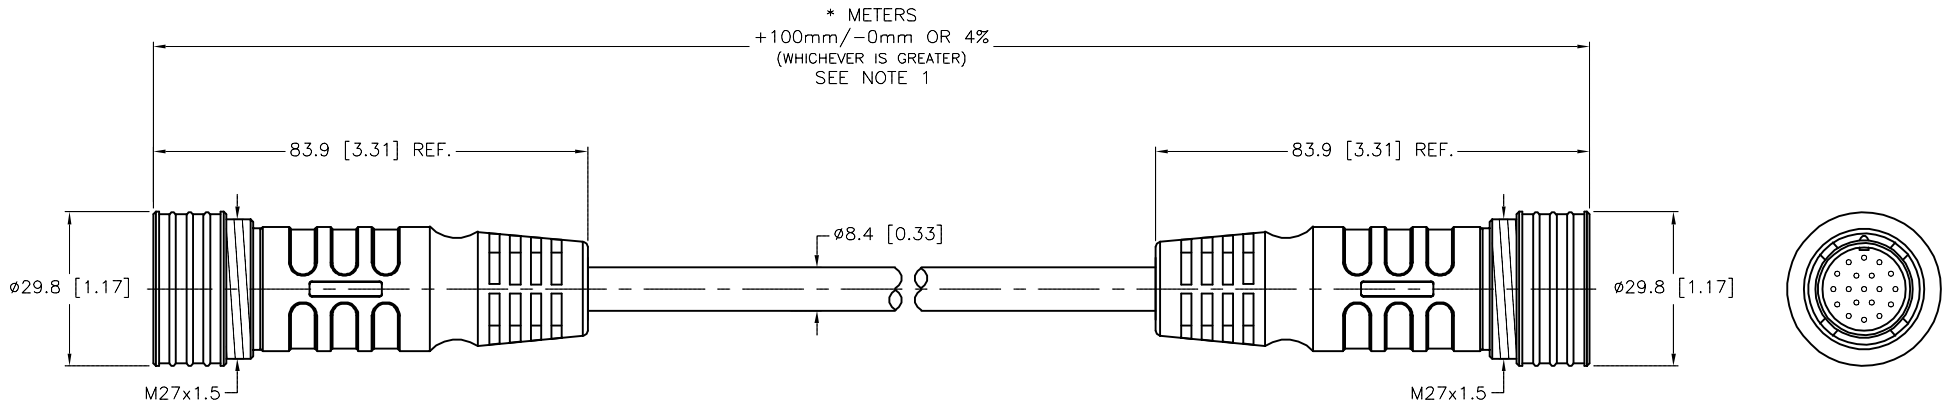NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S760" DESIGNATES CABLE WITH "BLACK" OUTER JACKET.
- "/S3020" DESIGNATES "VALUE FAST" CABLE.

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "★" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S760" DESIGNATES CABLE WITH "BLACK" OUTER JACKET.

3. "/S3020" DESIGNATES "VALUE FAST" CABLE.

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<div> <div>3000 CAMPUS DRIVE</div> <div>MINNEAPOLIS, MN 55441</div> <div>1-800-544-7769</div> <div>(763) 553-7300</div> <div>(763) 553-0708 fax</div> <div>www.turck.us</div> </div> <div> <div>TURCK</div> </div>			
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 09/14/07		DESCRIPTION	
SEE SPECIFICATIONS							APVD		SCALE 1=1.5		CSMH CKMH 19-19-*/S760/S3020	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS							MILLIMETER [INCH]				F	
							DO NOT SCALE THIS DRAWING		FILE: 777020001		SHEET 1 OF 1	