
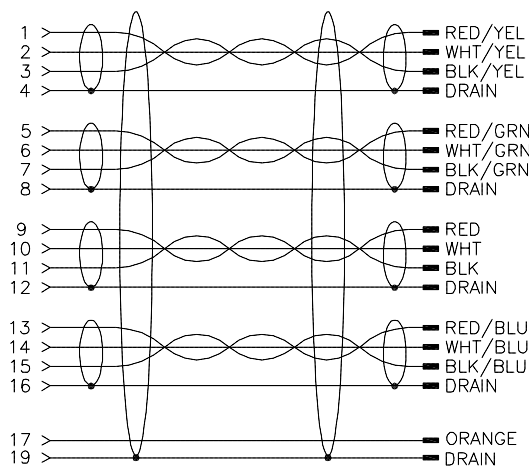
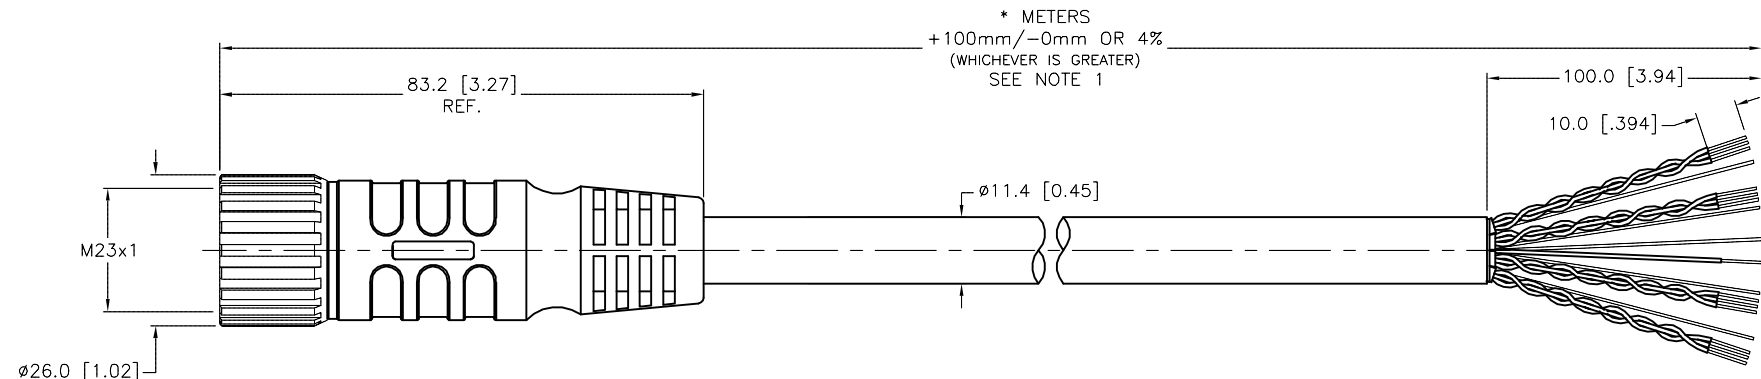


FEMALE END VIEW		WIRING DIAGRAM	SPECIFICATIONS																															
  M23 connector			<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON or PBT</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>RATED CURRENT [A]</td><td>2.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>150 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>12x20 AWG, 1x22 AWG</td></tr><tr><td>DRAINS</td><td>4x22 AWG, 1x22 AWG</td></tr><tr><td>SHIELD</td><td>ALUM./POLYESTER FOIL</td></tr><tr><td>CONDUCTOR ARRANGEMENT</td><td>4 SHIELDED, TWISTED TRIADS WITH INDIVIDUAL DRAIN, 1 COMMUNICATION WIRE, 1 COMMON DRAIN</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>IEC IP67</td></tr><tr><td>CABLE RATINGS</td><td>UL: ITC/PLTC/AWM, 105C, 300V CSA: CMG/AWM, 105C, 300V</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON or PBT	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	RATED CURRENT [A]	2.0 A	RATED VOLTAGE [V]	150 V	OUTER JACKET MATERIAL/COLOR	PVC/BLACK	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	12x20 AWG, 1x22 AWG	DRAINS	4x22 AWG, 1x22 AWG	SHIELD	ALUM./POLYESTER FOIL	CONDUCTOR ARRANGEMENT	4 SHIELDED, TWISTED TRIADS WITH INDIVIDUAL DRAIN, 1 COMMUNICATION WIRE, 1 COMMON DRAIN	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	IEC IP67	CABLE RATINGS	UL: ITC/PLTC/AWM, 105C, 300V CSA: CMG/AWM, 105C, 300V	
CONTACT CARRIER MATERIAL	NYLON or PBT																																	
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK																																	
CONTACT MATERIAL/PLATING	BRASS/GOLD																																	
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																																	
RATED CURRENT [A]	2.0 A																																	
RATED VOLTAGE [V]	150 V																																	
OUTER JACKET MATERIAL/COLOR	PVC/BLACK																																	
CONDUCTOR INSULATION MATERIAL	PVC																																	
NUMBER OF CONDUCTORS [AWG]	12x20 AWG, 1x22 AWG																																	
DRAINS	4x22 AWG, 1x22 AWG																																	
SHIELD	ALUM./POLYESTER FOIL																																	
CONDUCTOR ARRANGEMENT	4 SHIELDED, TWISTED TRIADS WITH INDIVIDUAL DRAIN, 1 COMMUNICATION WIRE, 1 COMMON DRAIN																																	
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																																	
PROTECTION CLASS	IEC IP67																																	
CABLE RATINGS	UL: ITC/PLTC/AWM, 105C, 300V CSA: CMG/AWM, 105C, 300V																																	

																																																												
<table border="1"><thead><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr></thead><tbody><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr></tbody></table> * UNLESS OTHERWISE SPECIFIED					CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm																																						
CABLE LENGTH	TOLERANCE*																																																											
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																																																											
STRIP LENGTH	TOLERANCE*																																																											
0-7mm	±0.5mm																																																											
8-29mm	±1.0mm																																																											
30-49mm	±2.0mm																																																											
50-69mm	±3.0mm																																																											
70-100mm	±4.0mm																																																											
OVER 100mm	±5.0mm																																																											
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.																																																												
<table border="1"><thead><tr><th colspan="2">RELATED DOCUMENTS</th><th colspan="2">3RD ANGLE PROJECTION</th><th colspan="2">THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</th><th colspan="2">3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</th></tr></thead><tbody><tr><td colspan="2">1. MATERIAL</td><td colspan="2">ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</td><td colspan="2">DRFT RDS</td><td colspan="2">DATE 07/03/07</td></tr><tr><td colspan="2">2. FINISH</td><td colspan="2">SEE SPECIFICATIONS</td><td colspan="2">APVD</td><td colspan="2">SCALE 1=1.3</td></tr><tr><td colspan="2">3. UNIT OF MEASUREMENT</td><td colspan="2">MILLIMETER [INCH]</td><td colspan="2">DO NOT SCALE THIS DRAWING</td><td colspan="2">DESCRIPTION P-CKMV 19-1523-*</td></tr><tr><td colspan="2">4. IDENTIFICATION NO.</td><td colspan="2">G</td><td colspan="2">FILE: 777020040</td><td colspan="2">REV</td></tr><tr><td colspan="2">G</td><td colspan="2">UPDATE WIRING DIAGRAM</td><td colspan="2">RDS</td><td colspan="2">04/05/17</td></tr><tr><td colspan="2">REV</td><td colspan="2">DESCRIPTION</td><td colspan="2">BY</td><td colspan="2">DATE</td></tr></tbody></table>					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		1. MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 07/03/07		2. FINISH		SEE SPECIFICATIONS		APVD		SCALE 1=1.3		3. UNIT OF MEASUREMENT		MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		DESCRIPTION P-CKMV 19-1523-*		4. IDENTIFICATION NO.		G		FILE: 777020040		REV		G		UPDATE WIRING DIAGRAM		RDS		04/05/17		REV		DESCRIPTION		BY		DATE	
RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us																																																						
1. MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 07/03/07																																																						
2. FINISH		SEE SPECIFICATIONS		APVD		SCALE 1=1.3																																																						
3. UNIT OF MEASUREMENT		MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		DESCRIPTION P-CKMV 19-1523-*																																																						
4. IDENTIFICATION NO.		G		FILE: 777020040		REV																																																						
G		UPDATE WIRING DIAGRAM		RDS		04/05/17																																																						
REV		DESCRIPTION		BY		DATE																																																						