



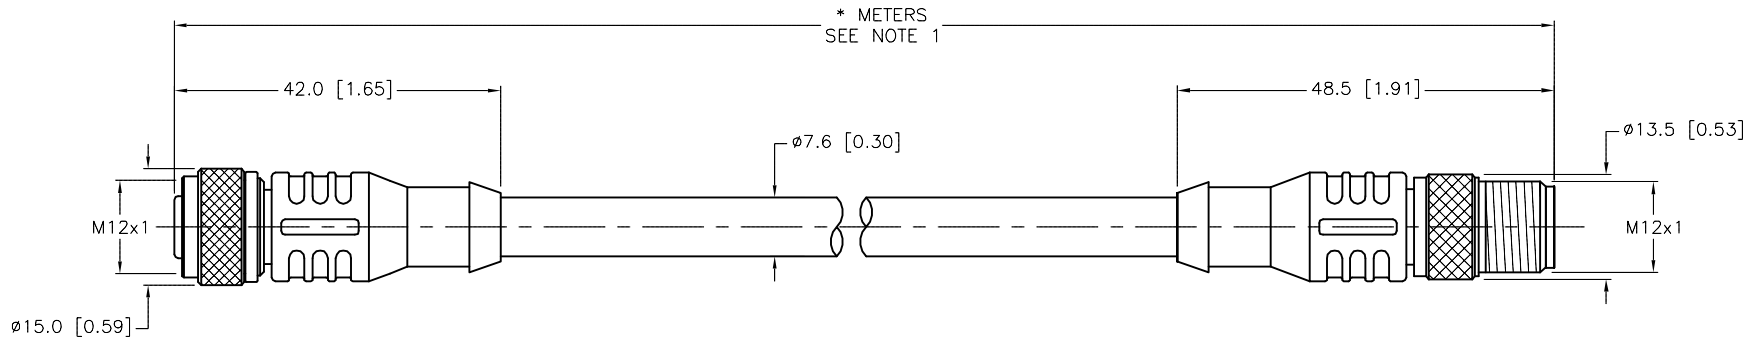


| FEMALE END VIEW | MALE END VIEW | SPECIFICATIONS | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|--|--------------------------|--------------|----------------------------|------------|--------------------------|------------|-------------------------------|----------------------------|-------------------|-------|-------------------|-------|-----------------------------------|------------|-------------------------------|-----|----------------------------|----------|-------------------|-----------------------------------|------------------|----------------------------------|--|
|  <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GRAY</p>  |  <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GRAY</p>  | <table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL (PTFE COATED)</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>TPE/YELLOW</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>5x18 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP68</td></tr></table> | CONTACT CARRIER MATERIAL | NYLON OR TPU | MOLDED HEAD MATERIAL/COLOR | TPU/YELLOW | CONTACT MATERIAL/PLATING | BRASS/GOLD | COUPLING NUT MATERIAL/PLATING | BRASS/NICKEL (PTFE COATED) | RATED CURRENT [A] | 4.0 A | RATED VOLTAGE [V] | 250 V | OUTER CABLE JACKET MATERIAL/COLOR | TPE/YELLOW | CONDUCTOR INSULATION MATERIAL | PVC | NUMBER OF CONDUCTORS [AWG] | 5x18 AWG | TEMPERATURE RANGE | -40°C to +105°C (-40°F to +221°F) | PROTECTION CLASS | MEETS NEMA 1,3,4,6P AND IEC IP68 | |
| CONTACT CARRIER MATERIAL | NYLON OR TPU | | | | | | | | | | | | | | | | | | | | | | | | |
| MOLDED HEAD MATERIAL/COLOR | TPU/YELLOW | | | | | | | | | | | | | | | | | | | | | | | | |
| CONTACT MATERIAL/PLATING | BRASS/GOLD | | | | | | | | | | | | | | | | | | | | | | | | |
| COUPLING NUT MATERIAL/PLATING | BRASS/NICKEL (PTFE COATED) | | | | | | | | | | | | | | | | | | | | | | | | |
| RATED CURRENT [A] | 4.0 A | | | | | | | | | | | | | | | | | | | | | | | | |
| RATED VOLTAGE [V] | 250 V | | | | | | | | | | | | | | | | | | | | | | | | |
| OUTER CABLE JACKET MATERIAL/COLOR | TPE/YELLOW | | | | | | | | | | | | | | | | | | | | | | | | |
| CONDUCTOR INSULATION MATERIAL | PVC | | | | | | | | | | | | | | | | | | | | | | | | |
| NUMBER OF CONDUCTORS [AWG] | 5x18 AWG | | | | | | | | | | | | | | | | | | | | | | | | |
| TEMPERATURE RANGE | -40°C to +105°C (-40°F to +221°F) | | | | | | | | | | | | | | | | | | | | | | | | |
| PROTECTION CLASS | MEETS NEMA 1,3,4,6P AND IEC IP68 | | | | | | | | | | | | | | | | | | | | | | | | |




| CABLE LENGTH | TOLERANCE * |
|--------------|---|
| ALL LENGTHS | + 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER |
| STRIP LENGTH | TOLERANCE * |
| 0-7mm | ±0.5mm |
| 8-29mm | ±1.0mm |
| 30-49mm | ±2.0mm |
| 50-69mm | ±3.0mm |
| 70-100mm | ±4.0mm |
| OVER 100mm | ±5.0mm |

*** UNLESS OTHERWISE SPECIFIED**

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S1092" DESIGNATES PTFE COATED COUPLING NUT. (NICKEL PLATED BRASS COUPLING NUT WITH PTFE OVERCOAT).
3. "/S1587" DESIGNATES "WELDLIFE" CABLE.
4. "/SV" DESIGNATES SPECIAL PACKAGING FOR VENDING MACHINES.

SOURCE DRAWING - FOR REFERENCE ONLY

| | | | | | | |
|------------------------------------|----|----|----|---|--|-------------|
| RELATED DOCUMENTS | | | | | TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com | |
| 1. | 2. | 3. | 4. |  | | |
| MATERIAL | | | | | DRFT | RWC |
| SEE SPECIFICATIONS | | | | | APVD | SCALE 1=1.0 |
| FINISH | | | | | UNIT OF MEASUREMENT | |
| SEE SPECIFICATIONS | | | | | MILLIMETER [INCH] | |
| CONTACT TURCK FOR MORE INFORMATION | | | | | IDENTIFICATION NO. | |
| DO NOT SCALE THIS DRAWING | | | | | REV | |
| FILE: 777020043 | | | | | E | |
| SHEET 1 OF 1 | | | | | | |

| | | | | |
|-----|-----------------------|-----|----------|---------|
| E | UPDATE CABLE DIAMETER | KMY | 12/06/12 | 40297 |
| REV | DESCRIPTION | BY | DATE | ECO NO. |