



SPECIFICATIONS		
CONTACT CARRIER MATERIAL	TPU	
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	
CONTACT MATERIAL/PLATING	BRASS/GOLD	
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	
RATED CURRENT [A]	9.0 A	
RATED VOLTAGE [V]	250 V	
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW	
CONDUCTORS [AWG]	3x18 AWG	
CONDUCTOR INSULATION MATERIAL	PVC	
TEMPERATURE RATING	-40° C to $+105^{\circ}$ C (-40° F to $+221^{\circ}$ F)	
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K	

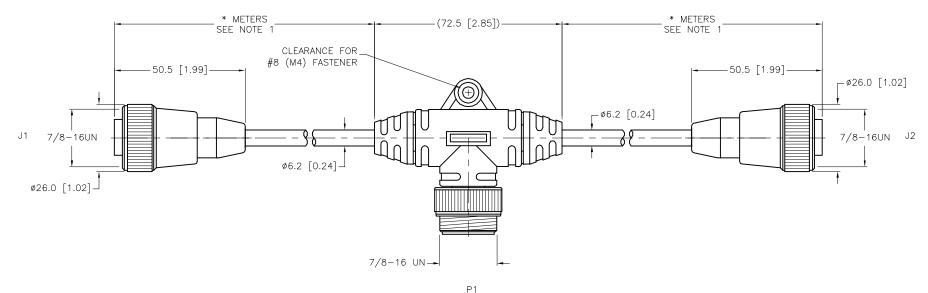



RELATED DOCUMENTS

CABLE LENGTH	TOLERANCE *	
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	
STRIP LENGTH	TOLERANCE *	
0-7mm	±0.5mm	
8-29mm	±1.0mm	
30-49mm	±2.0mm	
50-69mm	±3.0mm	
70-100mm	±4.0mm	
OVER 100mm	±5.0mm	
* UNLESS O	THERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

	'·
	MAT
PECIFIC	

2. 3. 4.	₩
MATERIAL	
	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY
FINISH	CONTACT TURCK
	FOR MORE

3RD ANGLE PROJECTION

INFORMATION

THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us

SHEET 1 OF 1

DATE 10/05/07 DESCRIPTION RKM 30-*-RSM 50-RKM 30-*

FILE: 777020213

UNIT OF MEASUREMENT

RDS

APVD

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

IDENTIFICATION NO.

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

 C
 UPDATE PROTECTION CLASS
 CBM 04/13/21
 76628

 REV
 DESCRIPTION
 BY
 DATE
 ECO NO.