








FEMALE END VIEW	MALE END VIEW	M30x1.5 LOCKNUT	SPECIFICATIONS	
 1 = BARE (SHIELD) 2 = RED (+ VOLTAGE) 3 = BLACK (- VOLTAGE) 4 = WHITE (CAN_H) 5 = BLUE (CAN_L)	 1 = BARE (SHIELD) 2 = RED (+ VOLTAGE) 3 = BLACK (- VOLTAGE) 4 = WHITE (CAN_H) 5 = BLUE (CAN_L)		CONTACT CARRIER MATERIAL/COLOR	TPU/BLUE-GRAY
			MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	250 V
			OUTER JACKET MATERIAL/COLOR	TPU/GRAY
			CONDUCTOR INSULATION MATERIAL	FOAMED HDPE (DATA), PVC (POWER)
			NUMBER OF CONDUCTORS [AWG]	2x17 AWG, 2x20 AWG, 20 AWG DRAIN
			SHIELDING	FOIL (PAIRS), ALUM.-POLYESTER FOIL (OVERALL)
			TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
			ACCOMMODATES WALL THICKNESS	.050" (1.3mm) to .250" (6.4mm)

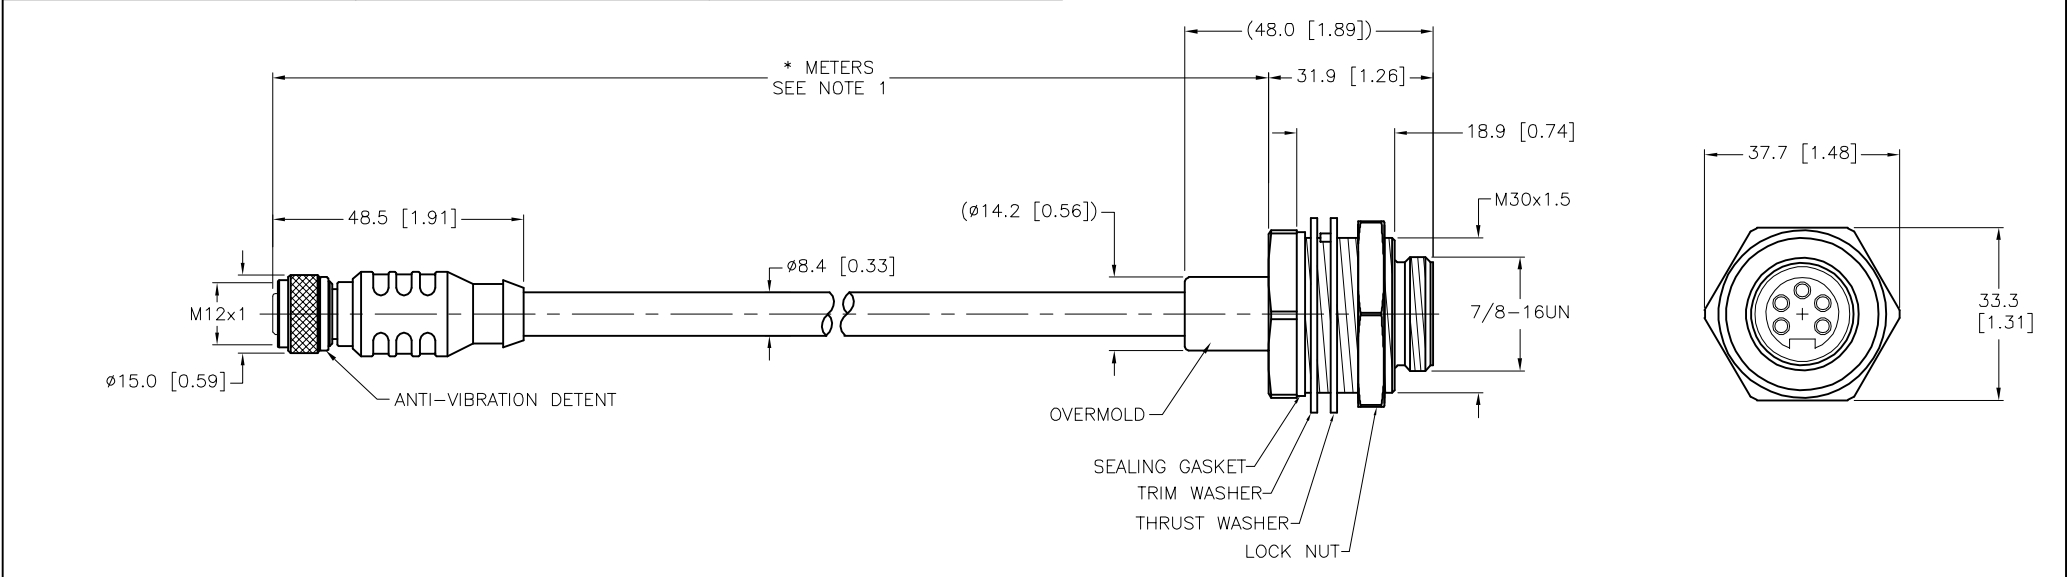

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	



NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

<table><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr><tr><td colspan="2">*UNLESS OTHERWISE SPECIFIED</td></tr></table>		50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm	*UNLESS OTHERWISE SPECIFIED		<table><tr><td>ø30.5 [ø1.20]</td><td></td></tr></table>	ø30.5 [ø1.20]		RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
50-69mm	±3.0mm																					
70-100mm	±4.0mm																					
OVER 100mm	±5.0mm																					
*UNLESS OTHERWISE SPECIFIED																						
ø30.5 [ø1.20]																						
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.				1. 2. 3. 4.		DRFT RDS		DATE 10/30/07		DESCRIPTION RKC RSFP 5723-*M												
				MATERIAL		APVD		SCALE 1=1.5														
FINISH				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV E												
CONTACT TURCK FOR MORE INFORMATION				DO NOT SCALE THIS DRAWING		FILE: 777020390		SHEET 1 OF 1														
E	DRAWING PROCESSED AS PART OF ECO 33971			CBM	04/06/11	33971																
REV	DESCRIPTION			BY	DATE	ECO NO.																