
FEMALE END VIEW


1 = WHITE/BLACK 2 = BLACK/WHITE 3 = WHITE/GREEN 4 = GREEN/WHITE 5 = WHITE/RED

6 = RED/WHITE

7 = GRAY 8 = GREEN/YELLOW 9 = WHITE/ORANGE 10 = ORANGE/WHITE

SPECIFICATIONS				
CONTACT CARRIER MATERIAL/COLOR	POLYURETHANE/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED			
RATED CURRENT [A]	8.0 A			
RATED VOLTAGE [V]	600 V			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	10x18 AWG			
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K			



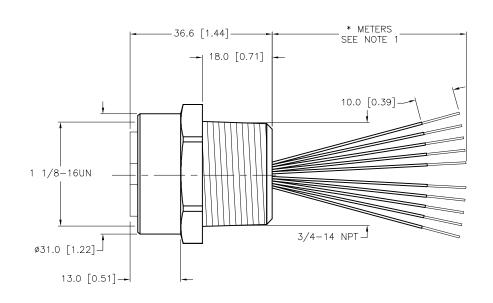

CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE*				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OTHERWISE SPECIFIED					

CBM 04/13/21

DATE

76628

ECO NO.

NOTES:

REV DESCRIPTION

C UPDATE PROTECTION CLASS

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.]	rck	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
MATERIAL		DRFT RDS	DATE 12/07/07	DESCRIPTION DESCRIPTION	* /1.4 7E /NIDT
SFF SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.0	P-KKFV TUT	-*/14.75/NPT
DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT		IDENTIFICATION NO.	REV
FINISH	CONTACT TURON	NAU I INACTO	ER[INCH]	IDENTIFICATION NO.	KEV
SFF SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIME			
1		DO NOT SCALE	THIS DRAWING	FILE: 777020707	SHEET 1 OF 1