


A diagram of a rectangular container with rounded corners. Inside the container, there are eight small circles arranged in two rows of four. Four arrows point from the labels 1, 5, 6, and 9 to the top-left, top-right, bottom-left, and bottom-right corners of the container, respectively. Label 5 is positioned outside the container at the top right, while labels 1, 6, and 9 are positioned outside at their respective corners.




CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
OUTER CABLE JACKET MATERIAL/COLOR	PVC/VIOLET
CONDUCTOR INSULATION MATERIAL	POLYETHYLENE
NUMBER OF CONDUCTORS [AWG]	2x22 AWG (SHIELDED DATE PAIR WITH DRAIN WIRE)
DRAIN/SHIELD	22 AWG/ALUM. MYLAR AND TINNED-COPPER, BRAIDED
TEMPERATURE RANGE	-25°C to +60°C (-13°F to +140°F)
PROTECTION CLASS	MEETS IP20
PROFIBUS TERMINATING RESISTOR	YES

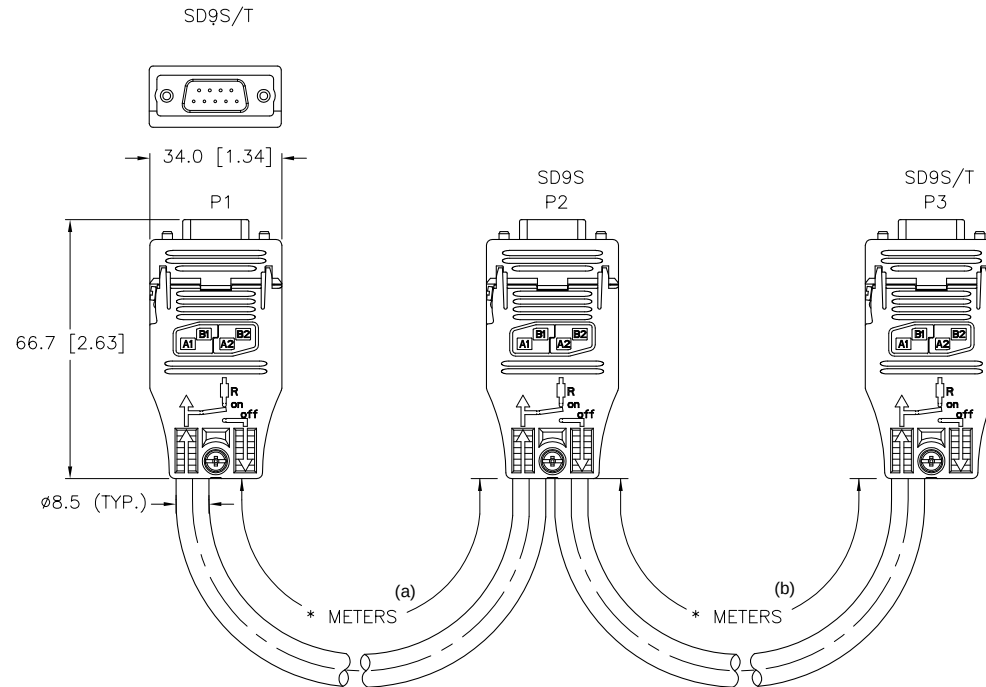

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1.				DRFT	RDS	DATE	01/15/08		
2.				DSGN		SCALE	1=2.0		
3.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETERS DO NOT SCALE THIS DRAWING			DESCRIPTION SD9S/T SD9S SD9S/T 455-*M-*M (a) (b)		
4.							CONTACT TURCK FOR MORE INFORMATION		
MATERIAL				FILE: 777020874		SHEET 1 OF 1			
FINISH									

SOURCE DRAWING - FOR REFERENCE ONLY