
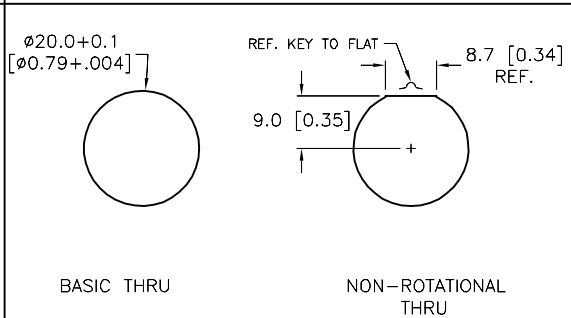



FEMALE END VIEW	PANEL CUTOUT (TYPICAL)	SPECIFICATIONS	
 1 = VIOLET 2 = RED 3 = GRAY 4 = RED/BLUE 5 = GREEN 6 = BLUE 7 = GRAY/PINK 8 = WHITE/GREEN 9 = WHITE/YELLOW 10 = WHITE/GRAY 11 = BLACK 12 = GREEN/YELLOW 13 = YELLOW/BROWN 14 = BROWN/GREEN 15 = WHITE 16 = YELLOW 17 = PINK 18 = GRAY/BROWN 19 = BROWN	 BASIC THRU NON-ROTATIONAL THRU	CONTACT CARRIER MATERIAL	NYLON OR TPU
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		HOUSING/LOCKNUT MATERIAL/PLATING	BRASS/NICKEL
		O-RING/GASKET MATERIAL	RUBBRE (NITRILE or FPM)
		RATED CURRENT [A]	7.0 A MAX 18 AWG (TOTAL CURRENT NOT TO EXCEED 84 AMPS)
		RATED VOLTAGE [V]	150 V
		OUTER CABLE JACKET MATERIAL/COLOR	TPU/YELLOW
		CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
		NUMBER OF CONDUCTORS [AWG]	20x18 AWG
		TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
		MAXIMUM PANEL THICKNESS	3.5 [0.138]

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS. 2. "/CS10462" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU), 18 AWG, FLEXLIFE-20 CABLE AND STANDARD PINOUT.					RELATED DOCUMENTS 1. 2. 3. 4. MATERIAL SEE SPECIFICATIONS FINISH SEE SPECIFICATIONS 3RD ANGLE PROJECTION  ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. DRFT APVD RWC DATE 01/24/08 SCALE 1=1.3 UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us DESCRIPTION CKF 19-19-*/CS10462 IDENTIFICATION NO. REV J FILE: 777020950 SHEET 1 OF 1				
					J UPDATE GASKET MATERIAL NF 11/20/19 75416 REV DESCRIPTION BY DATE ECO NO.				