






FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	 1 = BROWN 2 = BLACK 3 = WHITE 4 = BLUE 5 = N/C		CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	250 V
			OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	4x22 AWG
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

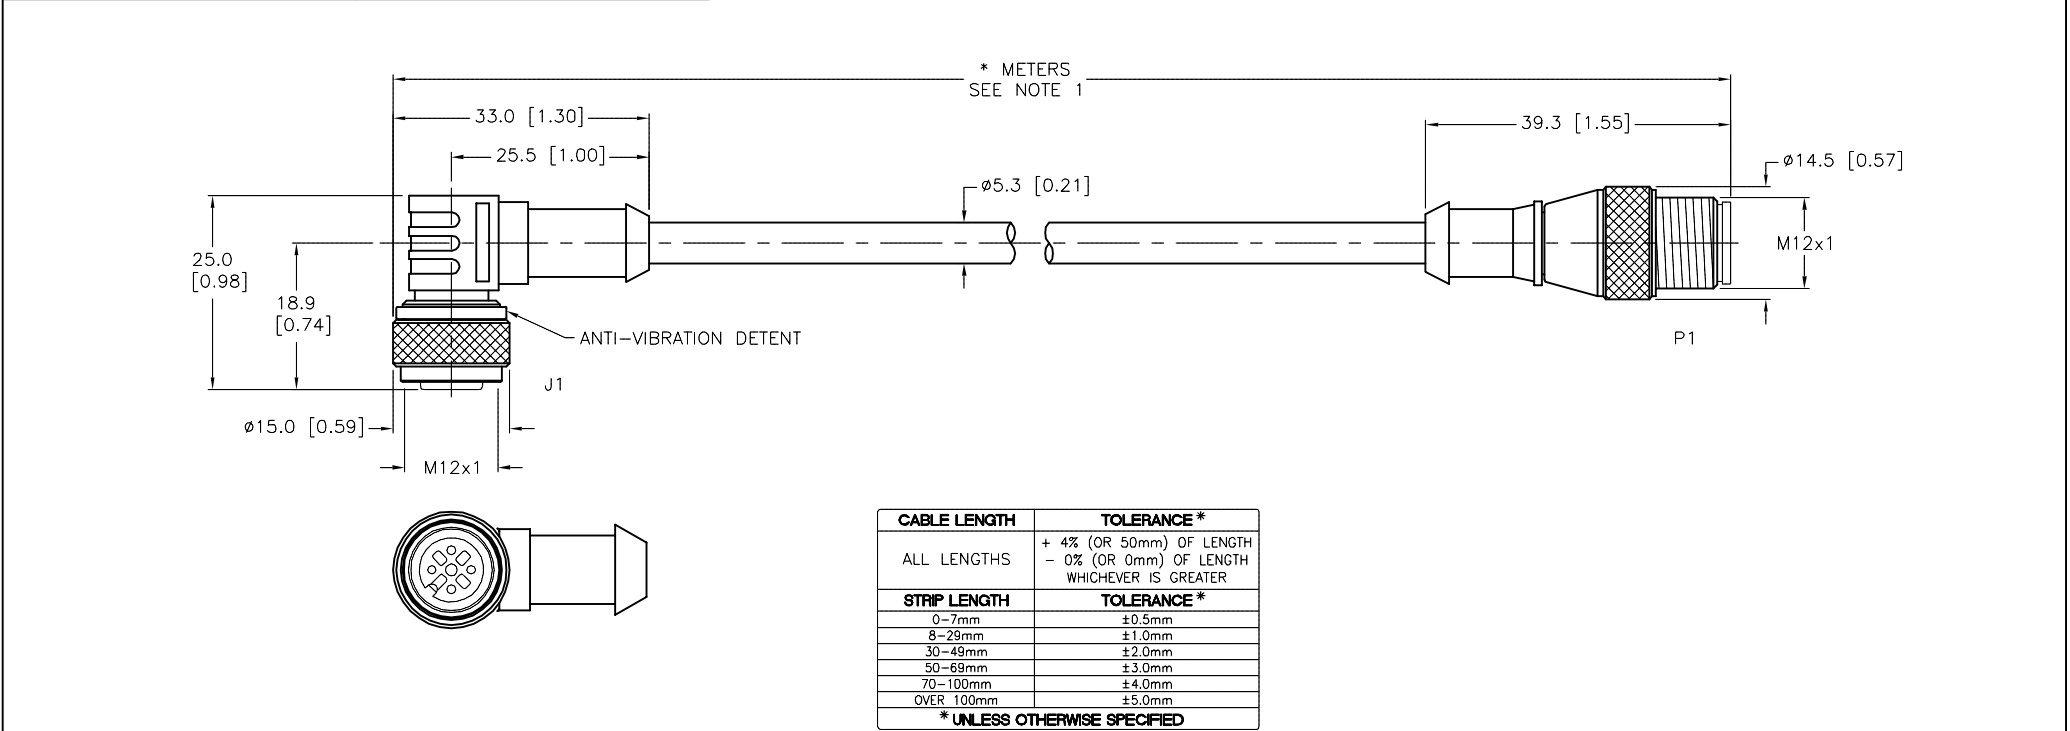

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/CS11729" DESIGNATES CUSTOM WIRING.

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.										
MATERIAL					DRFT RWC		DATE	01/09/08	DESCRIPTION	
SEE SPECIFICATIONS					APVD		SCALE	1=1.0	WK 4.43T-*--RS 4.5T/CS11729	
FINISH					UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		D	
					DO NOT SCALE THIS DRAWING		FILE: 777020960		SHEET 1 OF 1	

D	UPDATE CABLE OD PER ECO	TR	01/06/12	37147
REV	DESCRIPTION	BY	DATE	ECO NO.