




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	TPU OR NYLON
1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK		1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	4.0 A
				RATED VOLTAGE [V]	250 V
				OUTER CABLE JACKET MATERIAL/COLOR	TPE/YELLOW
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	4x22 AWG
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68



TURCK
FAST



TURCK
FAST

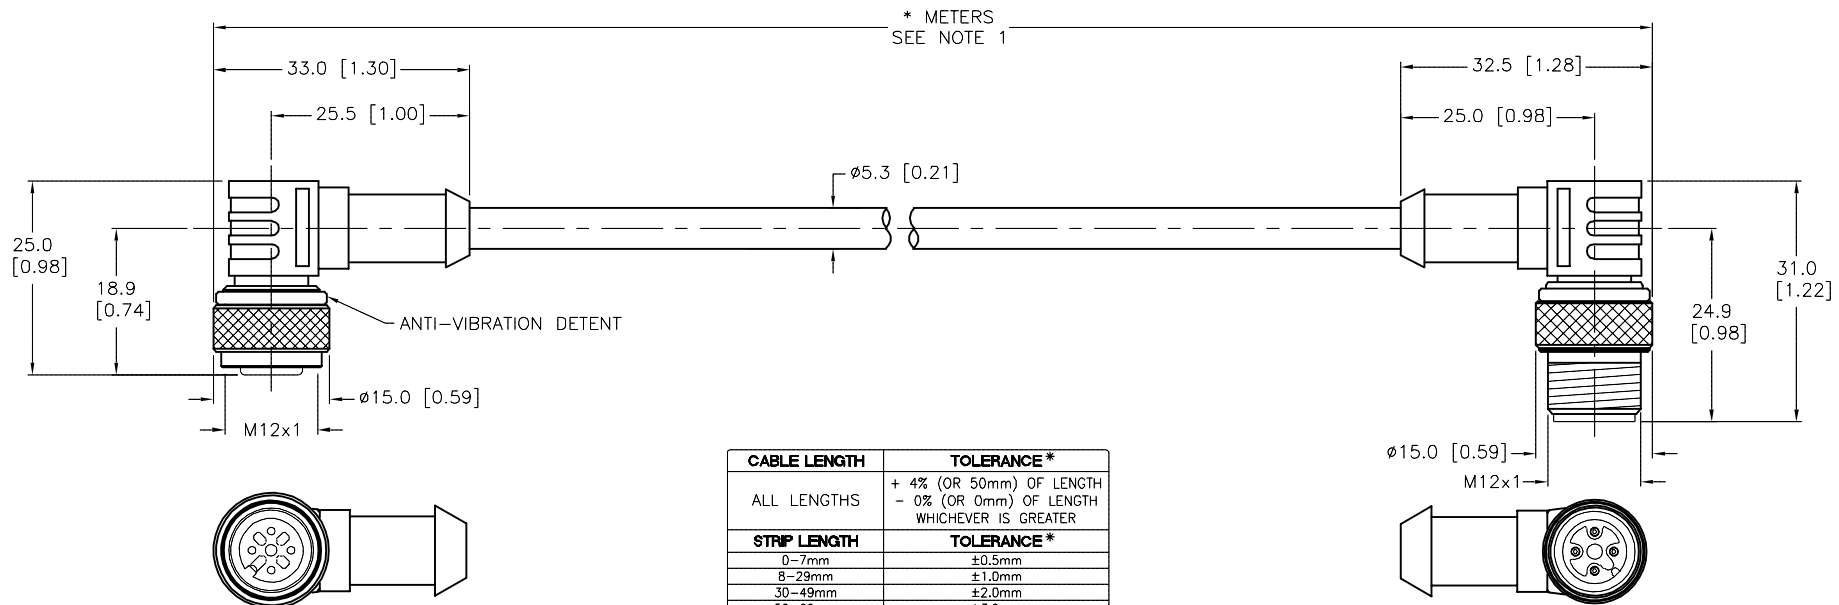

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 2. "/S1587" DESIGNATES WELDLIFE CABLE.

B	UPDATE MALE COUPLING NUT	NF	04/24/18	56903	SEE SPECIFICATIONS	FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING		D
REV	DESCRIPTION	BY	DATE	ECO NO.				FILE: 777021183	