

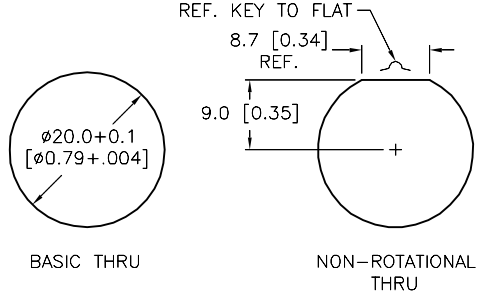


FEMALE END VIEW		PANEL CUTOUT (TYPICAL)		SPECIFICATIONS	
 1 = BROWN 2 = N/C 3 = BLUE 4 = WHITE 5 = N/C 6 = GREEN 7 = YELLOW 8 = GRAY 9 = N/C 10 = N/C 11 = N/C 12 = GREEN/YELLOW		 BASIC THRU NON-ROTATIONAL THRU		CONTACT CARRIER MATERIAL/COLOR	NYLON or PBT/GRAY
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				HOUSING/LOCKNUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				O-RNG/GASKET MATERIAL	RUBBER (NBR or FPM)
				RATED CURRENT [A]	6.0 A
				RATED VOLTAGE [V]	300 V
				OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	7x18 AWG
				DRAIN/SHIELD	20 AWG/ALUM.-POLYESTER FOIL
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS IEC IP67
				CABLE RATINGS	UL: ITC/PLTC/AWM, 105C, 300V CSA: CMG/AWM, 105C, 300V
				MAXIMUM PANEL THICKNESS	3.5 [0.138]

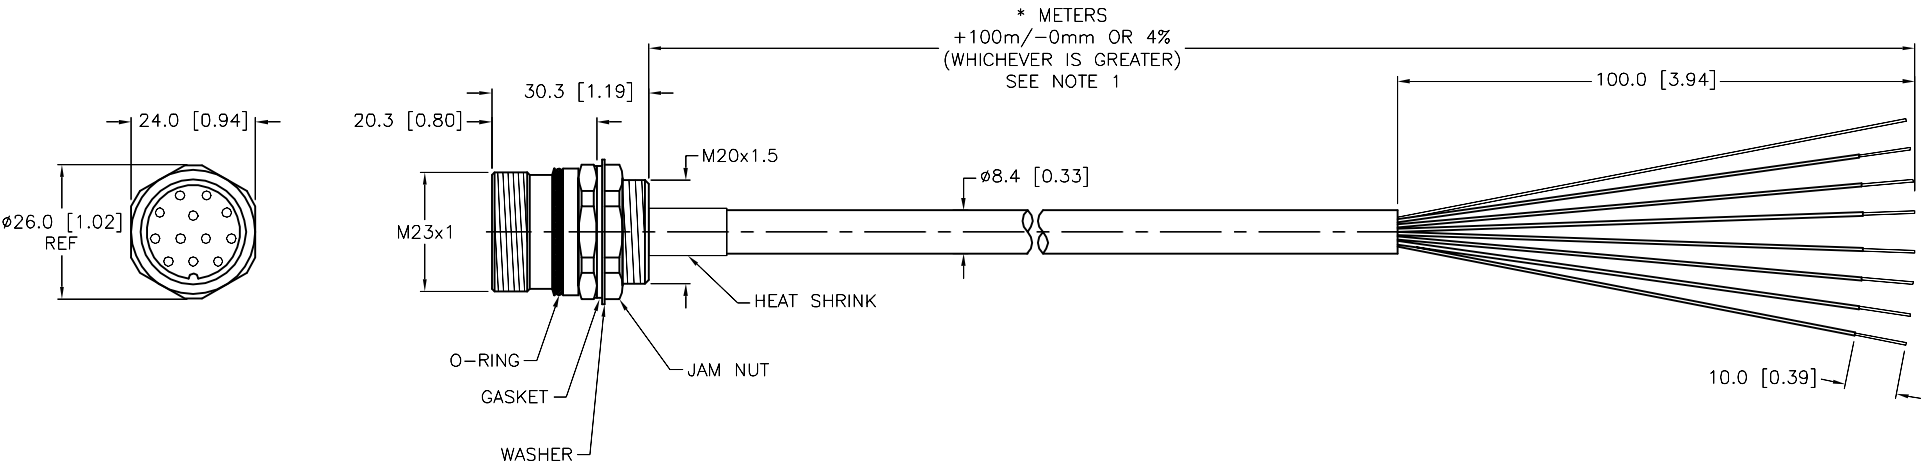

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.						DRFT RDS APVD A.F.		DATE 03/17/08 SCALE 1=1.5	
MATERIAL				SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION P-CKFLV 12-637-*	
FINISH				SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.	
C				UPDATE PANEL CUTOUT		CK		04/19/11	
REV				DESCRIPTION		BY		DATE	
								ECO NO.	
								DO NOT SCALE THIS DRAWING	
								FILE: 777021266	
								SHEET 1 OF 1	