

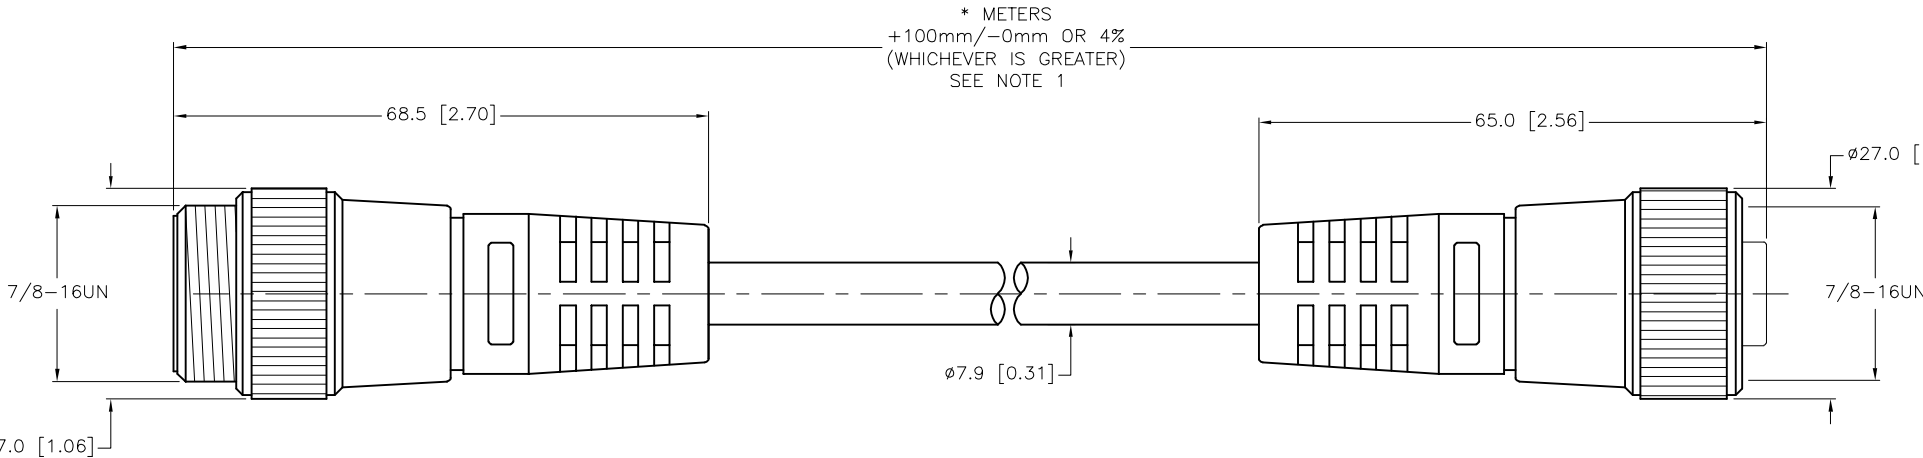



SPECIFICATIONS	
CONTACT CARRIER MATERIAL	TPU
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
OUTER JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
NUMBER OF CONDUCTORS [AWG]	3x18 AWG
DRAIN/SHIELD	20 AWG/ALUMINUM-POLYESTER FOIL
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K
CONDUCTOR ARRANGEMENT	1 SHIELDED TWISTED PAIR, 1 GROUND, 1 DRAIN
CABLE RATINGS	UL: ITC-ER/PLTC-ER, DIRECT BURIAL, 105C CSA: CIC, 90C, 600V C(UL): 245/1309 MARINE SHIPBOARD & IEEE 1580

MALE END VIEW	FEMALE END VIEW
 (LONG) 1 = BLUE 2 = BROWN 3 = DRAIN 4 = GREEN/YELLOW 	 1 = BLUE 2 = BROWN 3 = DRAIN 4 = GREEN/YELLOW 

																					
<table><tr><th>CABLE LENGTH</th><th>TOLERANCE *</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE *</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr><tr><td colspan="2">*UNLESS OTHERWISE SPECIFIED</td></tr></table>		CABLE LENGTH	TOLERANCE *	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE *	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm	*UNLESS OTHERWISE SPECIFIED	
CABLE LENGTH	TOLERANCE *																				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																				
STRIP LENGTH	TOLERANCE *																				
0-7mm	±0.5mm																				
8-29mm	±1.0mm																				
30-49mm	±2.0mm																				
50-69mm	±3.0mm																				
70-100mm	±4.0mm																				
OVER 100mm	±5.0mm																				
*UNLESS OTHERWISE SPECIFIED																					
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.																					
RELATED DOCUMENTS 1. 2. 3. 4.																					
3RD ANGLE PROJECTION 																					
THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.																					
DRFT RDS DATE 04/18/08 APVD SCALE 1=1.0																					
UNIT OF MEASUREMENT MILLIMETER [INCH]																					
DO NOT SCALE THIS DRAWING																					
3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us																					
TURCK																					
DESCRIPTION P-RSM RKM 40-330-*M																					
IDENTIFICATION NO. REV H																					
FILE: 777021521 SHEET 1 OF 1																					

H	UPDATE CABLE DIAMETER	KB	04/25/24	80101
REV	DESCRIPTION	BY	DATE	ECO NO.