



FEMALE END VIEW



- | | |
|------------------|-------------------|
| 1 = BROWN | 15 = BLUE |
| 2 = WHITE/GREY | 16 = BLACK/GREY |
| 3 = BLUE/GREY | 17 = BROWN/ORANGE |
| 4 = BROWN/GREY | 18 = WHITE/ORANGE |
| 5 = BLACK/YELLOW | 19 = BLACK/ORANGE |
| 6 = WHITE/YELLOW | 20 = BLACK/GREEN |
| 7 = BLUE/YELLOW | 21 = WHITE/GREEN |
| 8 = BROWN/YELLOW | 22 = BLUE/GREEN |
| 9 = BLACK/RED | 23 = BROWN/GREEN |
| 10 = WHITE/RED | 24 = BLUE/ORANGE |
| 11 = BLUE/RED | 25 = GREEN/YELLOW |
| 12 = BROWN/RED | 26 = N/C |
| 13 = BLACK | |
| 14 = WHITE | |
- DRAIN/SHIELD

SPECIFICATIONS


CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	25x22 AWG
DRAIN/SHIELD	22 AWG/ALUM.-POLYESTER FOIL
PROTECTION CLASS	IEC IP67
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)

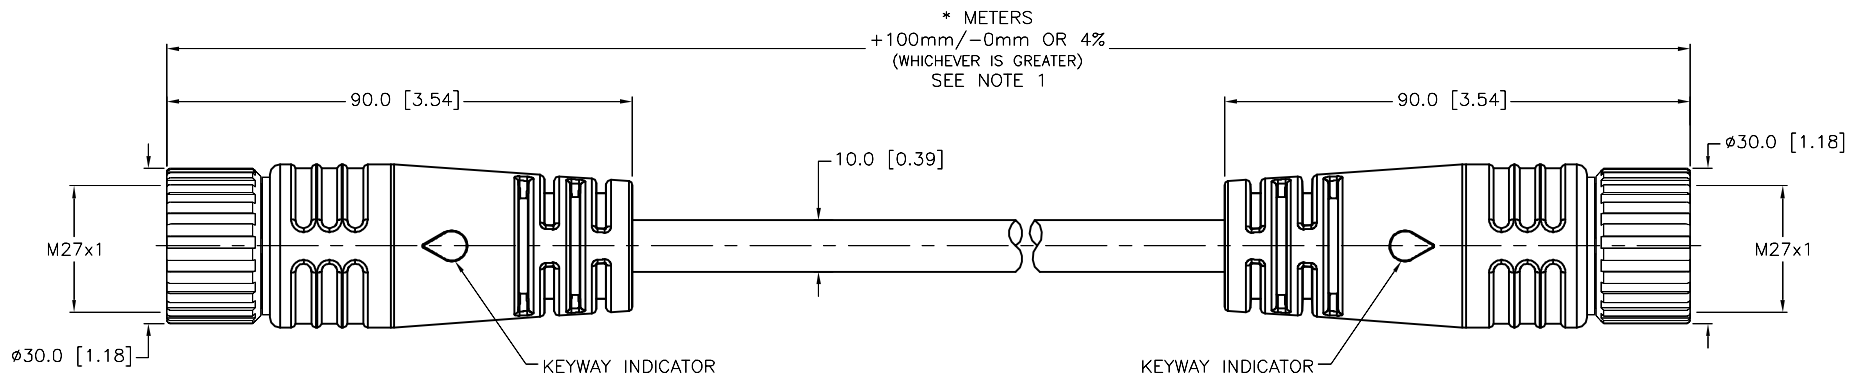

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK inc High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
						
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT RWC	DATE 05/13/08	DESCRIPTION DKM DKM 26-631-*		
SEE SPECIFICATIONS		APVD	SCALE 1=1.5			
FINISH		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT		IDENTIFICATION NO.	REV D
SEE SPECIFICATIONS			MILLIMETER [INCH]			
		DO NOT SCALE THIS DRAWING		FILE: 777021694		SHEET 1 OF 1