




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
 1 = RED/BLACK 2 = RED/WHITE 3 = RED 4 = GREEN/YELLOW 		 1 = RED/BLACK 2 = RED/WHITE 3 = RED 4 = GREEN/YELLOW 		CONTACT CARRIER MATERIAL	NYLON
				MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/COLOR	NYLON/BLACK
				RATED CURRENT [A]	4.0 A
				RATED VOLTAGE [V]	250 V
				OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	4x22 AWG
				TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

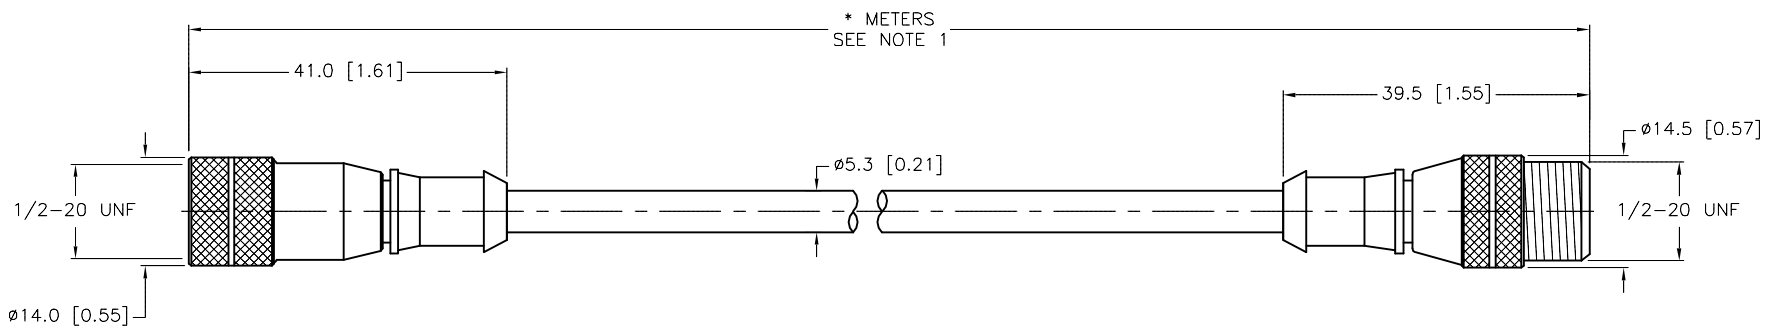

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1.		2.		3.		4.	
MATERIAL		DRFT		RDS		DATE 05/14/08	
FINISH		APVD		SCALE		1=1.0	
		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT		DESCRIPTION	
		CONTACT TURCK FOR MORE INFORMATION		MILLIMETER [INCH]		KBK 4T-*--SBK 4T	
		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV	
				FILE: 777021697		E	
						SHEET 1 OF 1	

E	UPDATE CONDUCTOR COLOR	NF	09/07/17	60844
REV	DESCRIPTION	BY	DATE	ECO NO.