



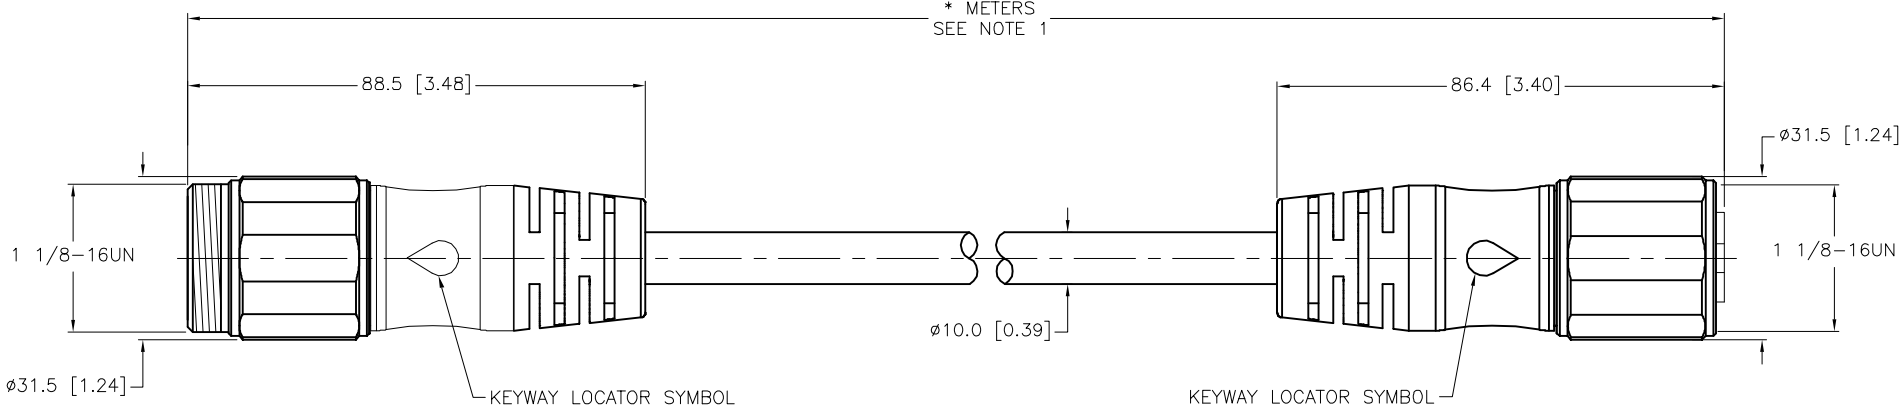








MALE END VIEW		FEMALE END VIEW		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	TPU
1 = VIOLET 2 = RED 3 = GREY 4 = RED/BLUE 5 = BLUE 6 = GREEN 7 = BROWN 8 = WHITE/GREEN 9 = WHITE/YELLOW 10 = WHITE/GREY 11 = BLACK 12 = GREEN/YELLOW 13 = YELLOW/BROWN 14 = BROWN/GREEN 15 = WHITE 16 = YELLOW 17 = PINK 18 = GREY/BROWN 19 = GREY/PINK		1 = VIOLET 2 = RED 3 = GREY 4 = RED/BLUE 5 = BLUE 6 = GREEN 7 = BROWN 8 = WHITE/GREEN 9 = WHITE/YELLOW 10 = WHITE/GREY 11 = BLACK 12 = GREEN/YELLOW 13 = YELLOW/BROWN 14 = BROWN/GREEN 15 = WHITE 16 = YELLOW 17 = PINK 18 = GREY/BROWN 19 = GREY/PINK		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				RATED CURRENT [A]	4.0 A (PINS 5,7,12), 2.0 A (ALL OTHERS)
				RATED VOLTAGE [V]	300 V
				OUTER JACKET MATERIAL/COLOR	TPU/YELLOW
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS	3x18 AWG/16x22 AWG
				DRAIN/SHIELD	20 AWG/ALUM.-POLYESTER FOIL
				TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
				PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K

		<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr><tr><td colspan="2">* UNLESS OTHERWISE SPECIFIED</td></tr></table>		CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm	* UNLESS OTHERWISE SPECIFIED		<p>NOTES:</p> <p>1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.</p> <p>2. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE JACKET.</p>											
CABLE LENGTH	TOLERANCE*																																		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																																		
STRIP LENGTH	TOLERANCE*																																		
0-7mm	±0.5mm																																		
8-29mm	±1.0mm																																		
30-49mm	±2.0mm																																		
50-69mm	±3.0mm																																		
70-100mm	±4.0mm																																		
OVER 100mm	±5.0mm																																		
* UNLESS OTHERWISE SPECIFIED																																			
<table><tr><td>RELATED DOCUMENTS</td><td>3RD ANGLE PROJECTION</td><td>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</td><td colspan="2"><p>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</p></td></tr><tr><td>1.</td><td rowspan="2"></td><td>DRFT</td><td>DATE 09/18/08</td><td rowspan="3">DESCRIPTION RSV RKV 190-*M/S90</td></tr><tr><td>2.</td><td>RDS</td><td>SCALE 1=1.5</td></tr><tr><td>3.</td><td rowspan="2">ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</td><td>APVD</td><td colspan="2">UNIT OF MEASUREMENT MILLIMETER [ INCH ]</td></tr><tr><td>4.</td><td colspan="2">CONTACT TURCK FOR MORE INFORMATION</td><td>IDENTIFICATION NO.</td></tr><tr><td>MATERIAL</td><td>SEE SPECIFICATIONS</td><td colspan="2">DO NOT SCALE THIS DRAWING</td><td>REV F</td></tr><tr><td>FINISH</td><td>SEE SPECIFICATIONS</td><td colspan="2">FILE: 777021737</td><td>SHEET 1 OF 1</td></tr></table>		RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	<p>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</p> 		1.		DRFT	DATE 09/18/08	DESCRIPTION RSV RKV 190-*M/S90	2.	RDS	SCALE 1=1.5	3.	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD	UNIT OF MEASUREMENT MILLIMETER [ INCH ]		4.	CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.	MATERIAL	SEE SPECIFICATIONS	DO NOT SCALE THIS DRAWING		REV F	FINISH	SEE SPECIFICATIONS	FILE: 777021737		SHEET 1 OF 1	<p>SOURCE DRAWING - FOR REFERENCE ONLY</p>	
RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	<p>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</p> 																																
1.		DRFT	DATE 09/18/08	DESCRIPTION RSV RKV 190-*M/S90																															
2.		RDS	SCALE 1=1.5																																
3.	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD	UNIT OF MEASUREMENT MILLIMETER [ INCH ]																																
4.		CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.																															
MATERIAL	SEE SPECIFICATIONS	DO NOT SCALE THIS DRAWING		REV F																															
FINISH	SEE SPECIFICATIONS	FILE: 777021737		SHEET 1 OF 1																															
F	UPDATE PROTECTION CLASS	CBM	04/13/21	76628																															
REV	DESCRIPTION	BY	DATE	ECO NO.																															