


VALVE END VIEW




1 = BLACK #1
2 = BLACK #2
GND = GREEN/YELLOW


WIRING DIAGRAM

J1

P1



MALE END VIEW




1 = N/C
2 = N/C
3 = BLACK #2
4 = BLACK #1
5 = GREEN/YELLOW



SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON or TPU
CONTACT MATERIAL/PLATING	BRASS/SILVER (J1), BRASS/GOLD (P1)
MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLK (J1), YEL (P1)
COUPLING NUT MATERIAL/FINISH (P1)	STAINLESS STEEL/PASSIVATED
RATED CURRENT	4.0 A
RATED VOLTAGE	24-48 VAC/DC
OUTER JACKET MATERIAL/COLOR	PVC/GRAY
CONDUCTOR INSULATION	PVC
NUMBER OF CONDUCTORS	3x18 AWG
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

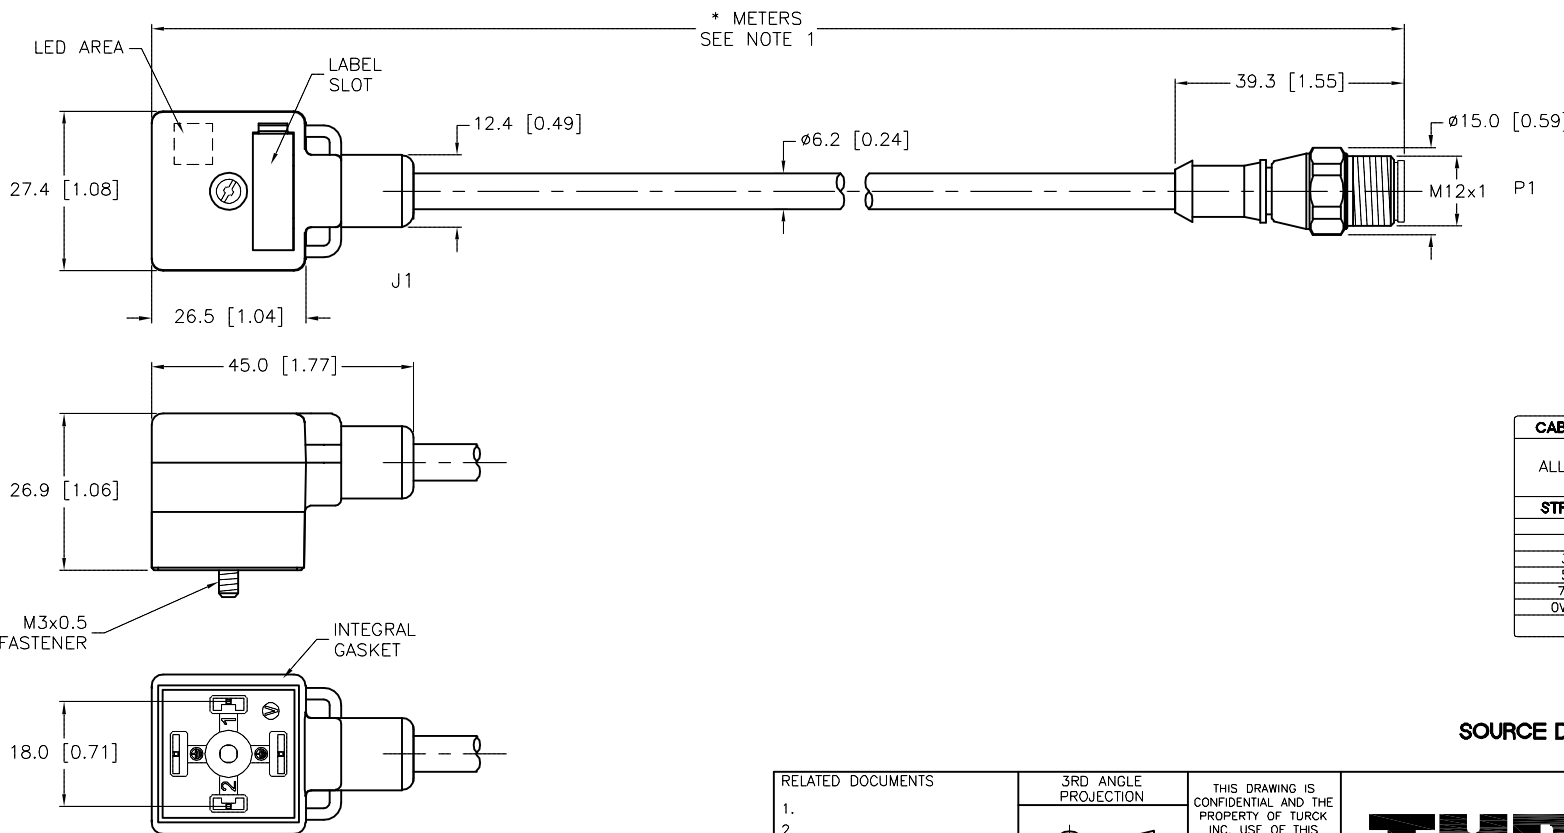

LED AREA

LABEL SLOT

27.4 [1.08]

26.5 [1.04]

12.4 [0.49]

45.0 [1.77]

26.9 [1.06]

18.0 [0.71]

39.3 [1.55]

39.3 [1.55]

15.0 [0.59]

12x1 P1

J1

M3x0.5 FASTENER

INTEGRAL GASKET

NOTES:

1."*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

* METERS
SEE NOTE 1



CABLE LENGTH

TOLERANCE*

ALL LENGTHS

+ 4% (OR 50mm) OF LENGTH
- 0% (OR 0mm) OF LENGTH
WHICHEVER IS GREATER

STRIP LENGTH

TOLERANCE*

0-7mm

±0.5mm

8-29mm

±1.0mm

30-49mm

±2.0mm

50-69mm

±3.0mm

70-100mm

±4.0mm

OVER 100mm

±5.0mm

* UNLESS OTHERWISE SPECIFIED

SOURCE DRAWING - FOR REFERENCE ONLY




3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RDS

DATE 05/19/08

APVD

SCALE 1=1.3

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DESCRIPTION

VAS 22-B653-*M-RSV 5.3T

IDENTIFICATION NO.

REV

C

FILE: 777021805

SHEET 1 OF 1

C

UPDATE VALVE PLUG MOLD BODY DESIGN

RDS

02/08/13

41241

REV

DESCRIPTION

BY

DATE

ECO NO.