




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
					
PAIR 1 < 1 = WHITE 2 = BROWN		PAIR 1 < 1 = WHITE 2 = BROWN		CONTACT CARRIER MATERIAL	
PAIR 2 < 3 = GREEN 4 = YELLOW		PAIR 2 < 3 = GREEN 4 = YELLOW		MOLDED HEAD MATERIAL/COLOR	
PAIR 3 < 5 = GRAY 6 = PINK		PAIR 3 < 5 = GRAY 6 = PINK		CONTACT MATERIAL/PLATING	
PAIR 4 < 7 = BLUE 8 = RED		PAIR 4 < 7 = BLUE 8 = RED		COUPLING NUT MATERIAL/PLATING	
				RATED CURRENT [A]	
				RATED VOLTAGE [V]	
				OUTER CABLE JACKET MATERIAL/COLOR	
				CONDUCTOR INSULATION MATERIAL	
				NUMBER OF CONDUCTORS [AWG]	
				DRAIN/SHIELD	
				TEMPERATURE RANGE	
				PROTECTION CLASS	

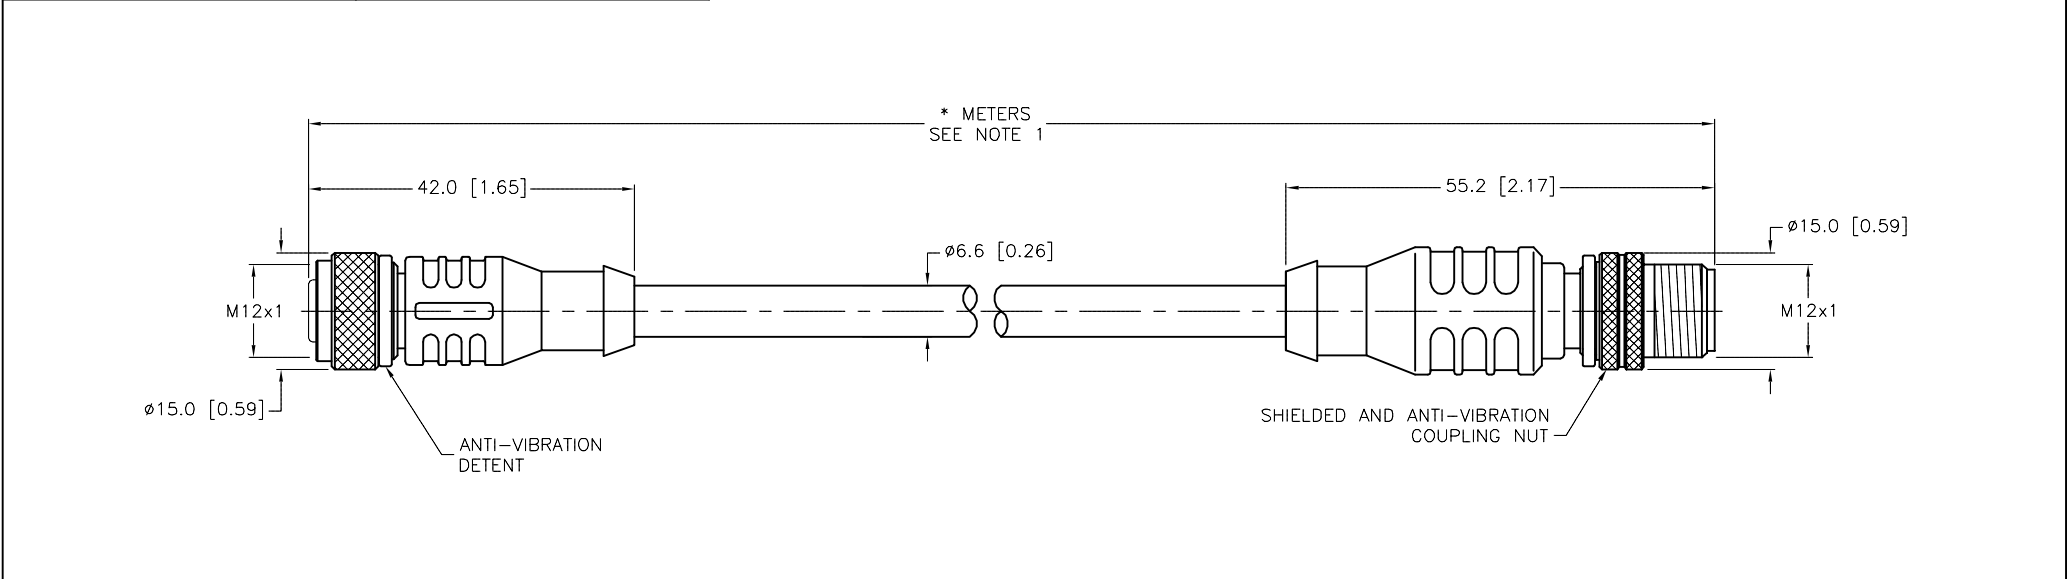


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT RDS		DATE 07/14/08	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.0	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS					SEE SPECIFICATIONS		MILLIMETER [INCH]		E-RKC 8T-264-* -RSS 8T	
SEE SPECIFICATIONS					DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV	
F DRAWING PROCESSED AS PART OF ECO 38169					BY		DATE		FILE: 777022407	
REV DESCRIPTION					ECO NO.		SHEET 1 OF 1			