


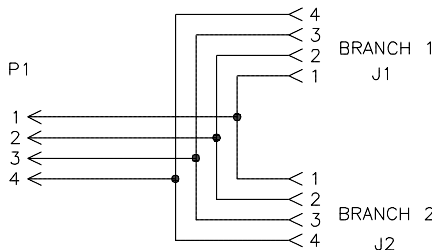



MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS			
			CONTACT CARRIER MATERIAL	NYLON OR TPU		
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW		
			CONTACT MATERIAL/PLATING	BRASS/GOLD		
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL		
			RATED CURRENT [A]	4.0 A		
			RATED VOLTAGE [V]	250 V		
			OUTER JACKET MATERIAL/COLOR	PVC/YELLOW		
			CONDUCTOR INSULATION MATERIAL	PVC		
			NUMBER OF CONDUCTOR [AWG]	4x18 AWG		
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)		
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68		

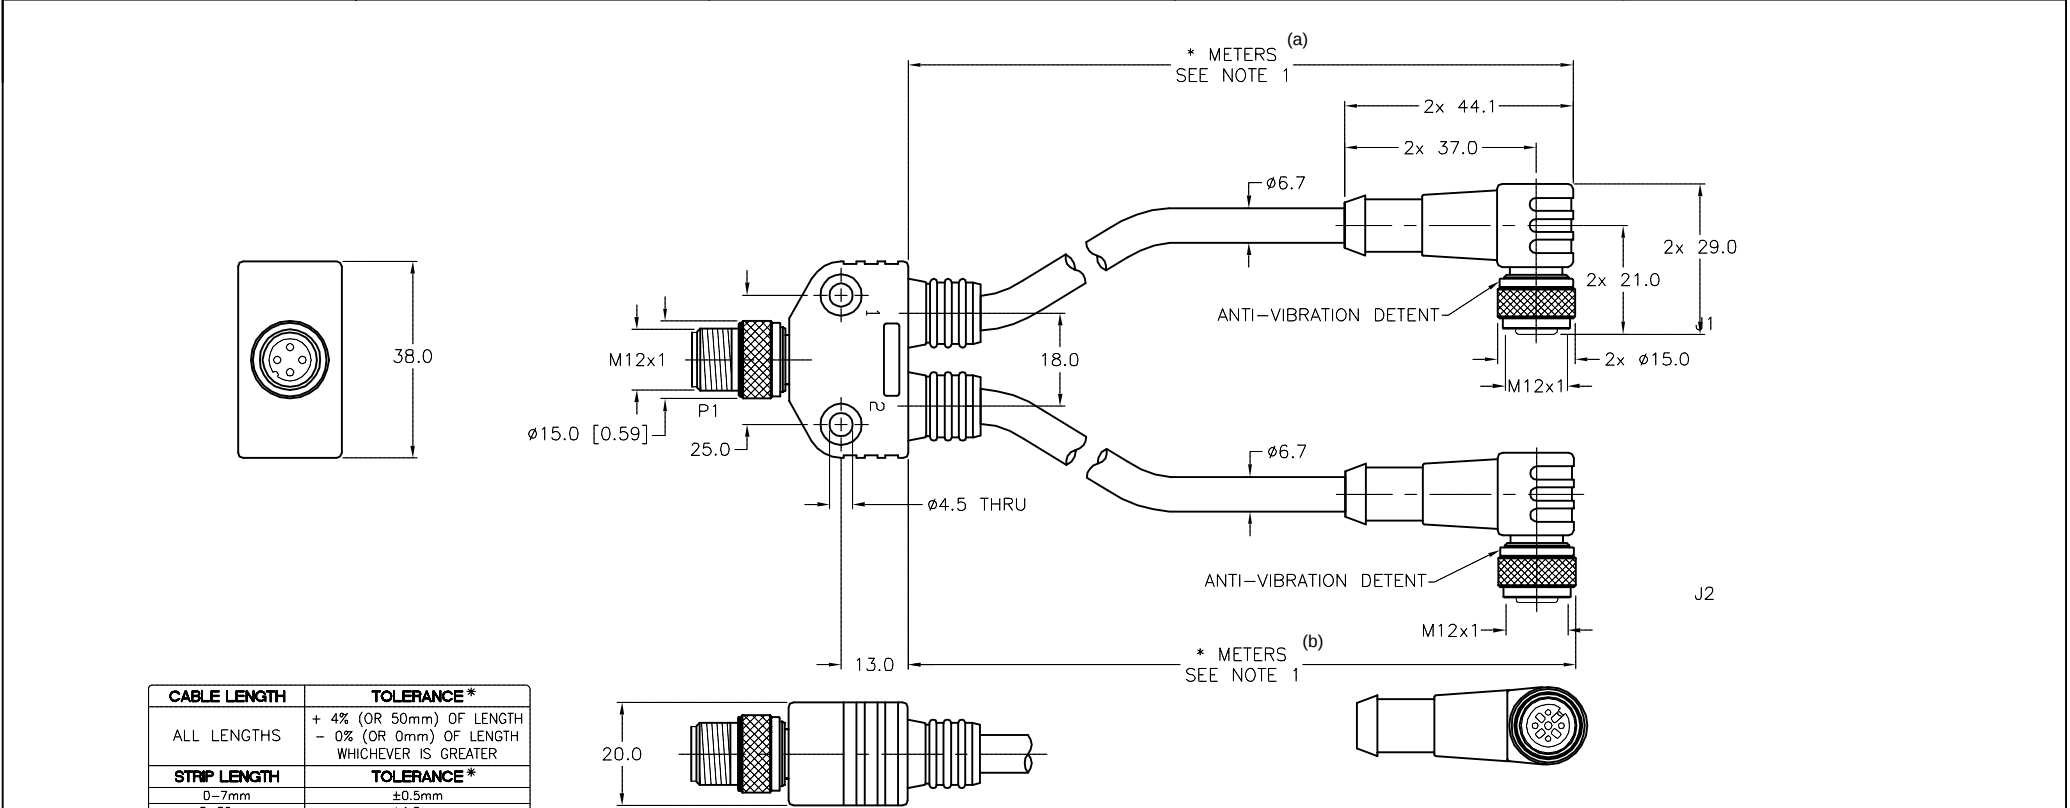

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S651" DESIGNATES PARALLEL WIRING.

D	UPDATE MALE COUPLING NUT	RDS	04/19/18	56902
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT RDS		DATE 07/21/08	
MATERIAL		SEE SPECIFICATIONS		APVD		SCALE 1=1.5	
FINISH		SEE SPECIFICATIONS		UNIT OF MEASUREMENT		DESCRIPTION	
				MILLIMETERS		VB2-FSM 4.4/2WKC 4.4T-*/*/S651	
				CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.	
						REV	
				DO NOT SCALE THIS DRAWING		FILE: 777022443	
						SHEET 1 OF 1	