



MALE END VIEW




- | | |
|------------------|-------------------|
| 1 = BROWN | 15 = BLUE |
| 2 = WHITE/GREY | 16 = BLACK/GREY |
| 3 = BLUE/GREY | 17 = BROWN/ORANGE |
| 4 = BROWN/GREY | 18 = WHITE/ORANGE |
| 5 = BLACK/YELLOW | 19 = BLACK/ORANGE |
| 6 = WHITE/YELLOW | 20 = BLACK/GREEN |
| 7 = BLUE/YELLOW | 21 = WHITE/GREEN |
| 8 = BROWN/YELLOW | 22 = BLUE/GREEN |
| 9 = BLACK/RED | 23 = BROWN/GREEN |
| 10 = WHITE/RED | 24 = BLUE/ORANGE |
| 11 = BLUE/RED | 25 = GREEN/YELLOW |
| 12 = BROWN/RED | 26 = N/C |
| 13 = BLACK | |
| 14 = WHITE | |
- DRAIN/SHIELD

FEMALE END VIEW



SPECIFICATIONS


CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	25x22 AWG
DRAIN/SHIELD	22 AWG/FOIL
PROTECTION CLASS	IEC IP67
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)

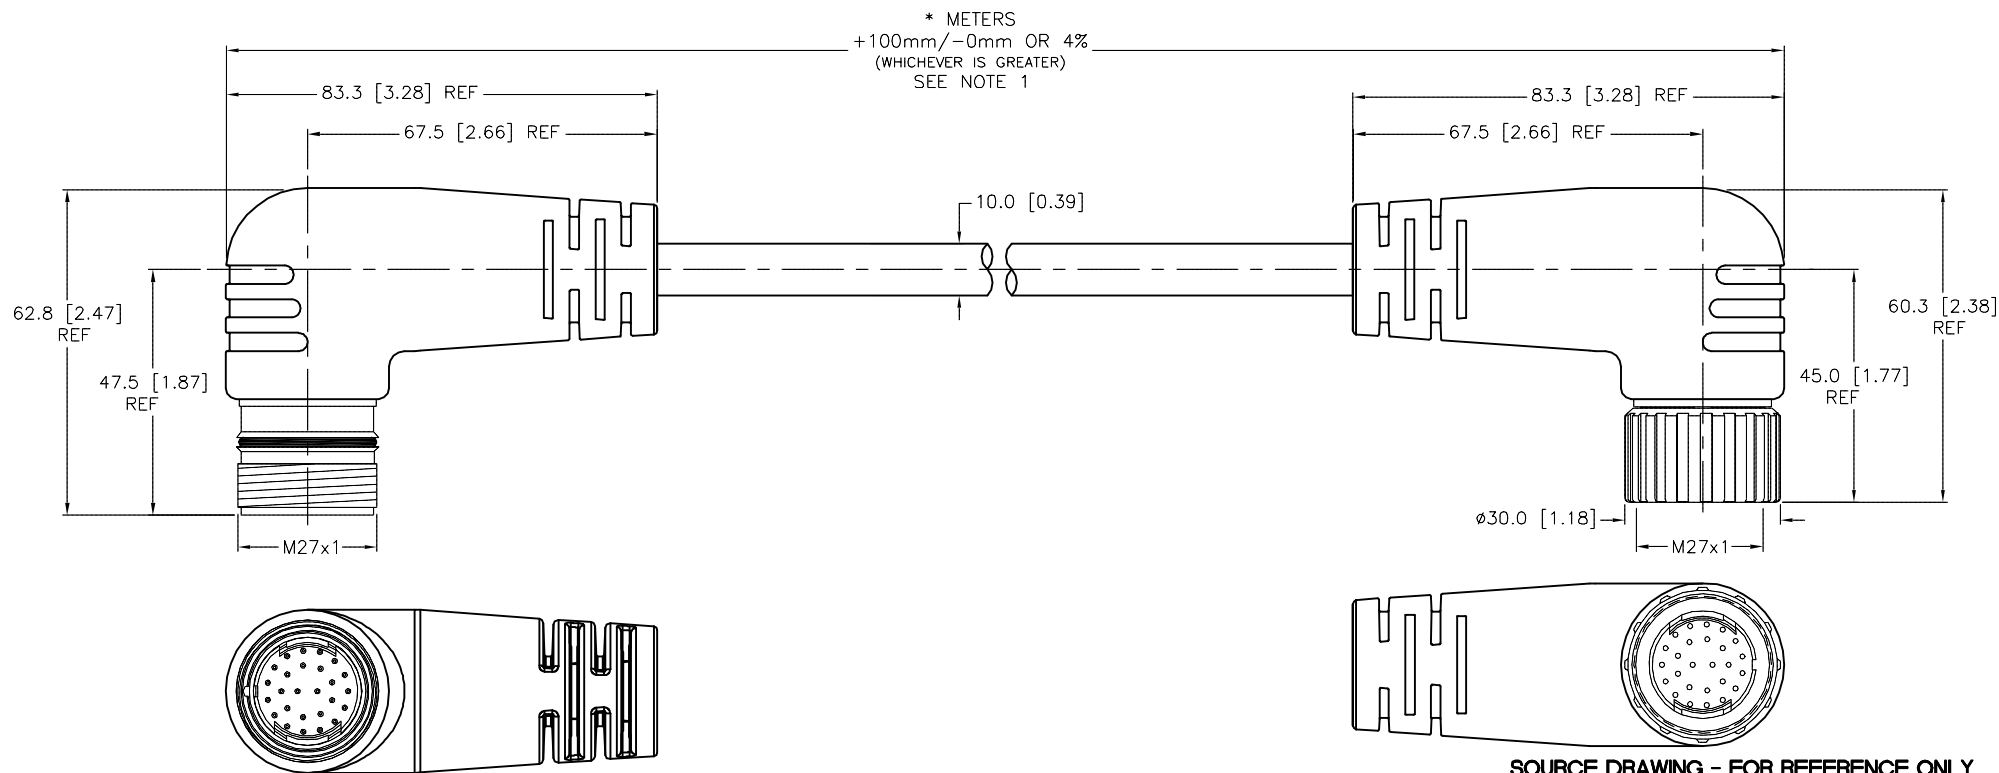

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK inc High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	RDS	DATE	07/28/08	DESCRIPTION DSSWM DKWM 26-631-*		
FINISH SEE SPECIFICATIONS		APVD		SCALE	1=1.5			
			UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING			IDENTIFICATION NO.		REV E
					FILE: 777022492		SHEET 1 OF	