



VALVE END VIEW



1 = BROWN
2 = BLUE
GND = GREEN/YELLOW

WIRING DIAGRAM


J1P1



1 = GREEN/YELLOW
2 = BROWN
3 = BLUE




MALE END VIEW



1 = GREEN/YELLOW
2 = BROWN
3 = BLUE

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON or TPU
CONTACT MATERIAL/PLATING	BRASS/SILVER (J1), BRASS/GOLD (P1)
MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLK (J1), YEL (P1)
COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL
RATED CURRENT	4.0 A
RATED VOLTAGE	110–220 VAC/VDC
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION	PVC
NUMBER OF CONDUCTORS	3x18 AWG
TEMPERATURE RATING	–40°C to +105°C (–40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

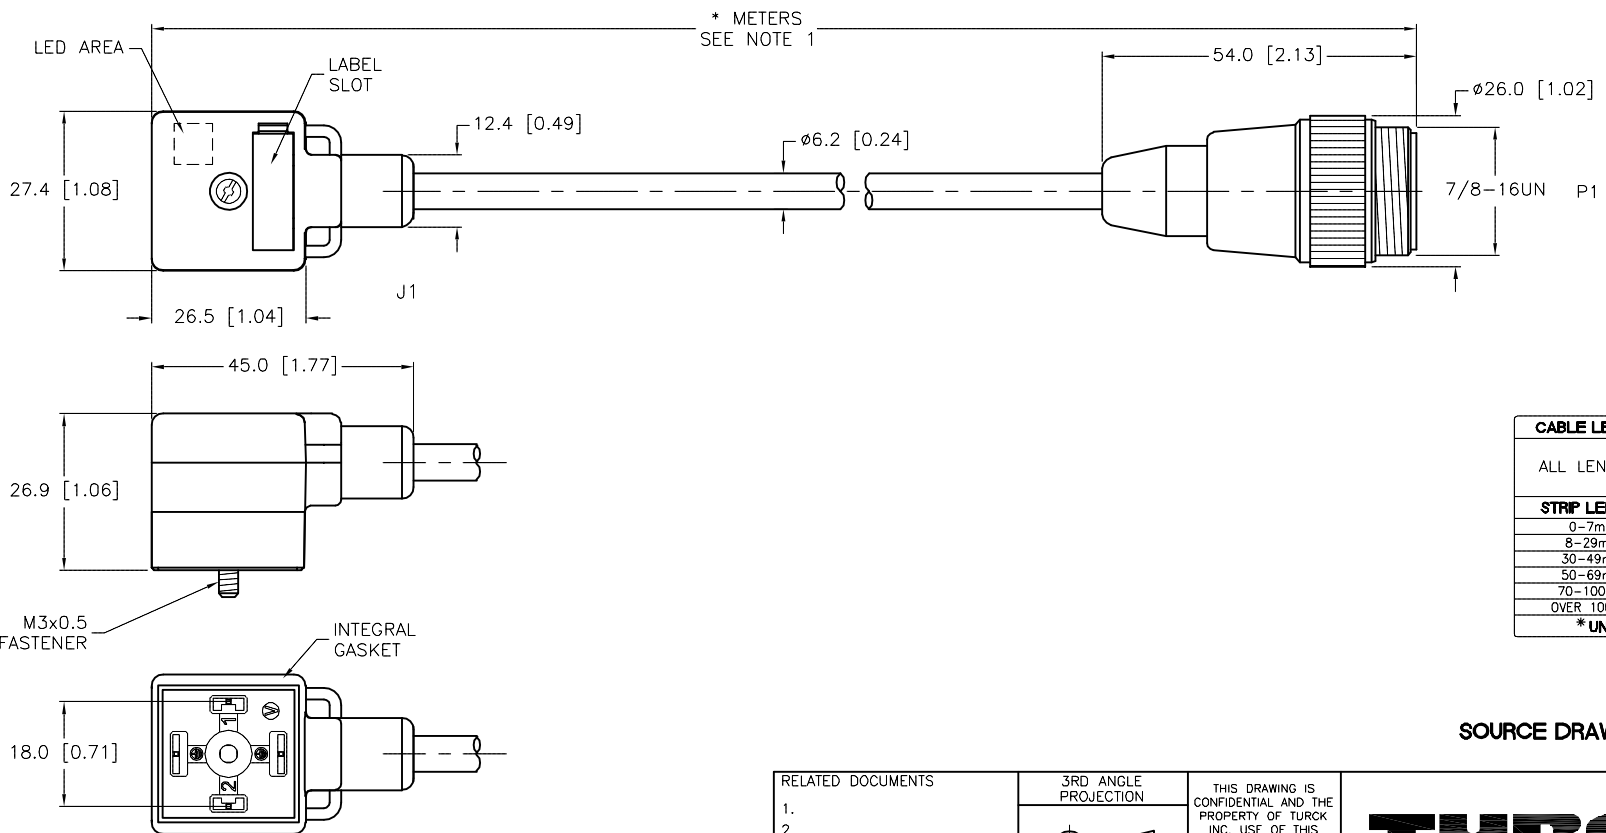

LED AREA
LABEL SLOT
12.4 [0.49]
27.4 [1.08]
26.5 [1.04]
J1
45.0 [1.77]
26.9 [1.06]
M3x0.5 FASTENER
INTEGRAL GASKET
18.0 [0.71]
54.0 [2.13]
ø6.2 [0.24]
ø26.0 [1.02]
7/8–16UN P1

NOTES:

1."*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS

1.
2.
3.
4.


MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RDS
APVD

DATE 08/01/08
SCALE 1=1.3

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1–800–544–7769
(763) 553–7300
(763) 553–0708 fax
www.turck.us



DESCRIPTION
VAS 22–C880–*M–RSM 30

IDENTIFICATION NO.

REV
F

FILE: 777022520

SHEET 1 OF 1