


VALVE END VIEW



1 = BROWN
2 = BLUE
GND = N/C

WIRING DIAGRAM

J1


P1

1 → 4

2 → 3

GND → N/C

N/C → 1




1 = N/C
3 = BLUE
4 = BROWN




SPECIFICATIONS


CONTACT CARRIER MATERIAL	NYLON or TPU
CONTACT MATERIAL/PLATING	BRASS/SILVER (J1), BRASS/GOLD (P1)
MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLK (J1), YEL (P1)
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (P1)
RATED CURRENT	4.0 A
RATED VOLTAGE	0-220 VAC/DC
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION	PVC
NUMBER OF CONDUCTORS	3x24 AWG
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

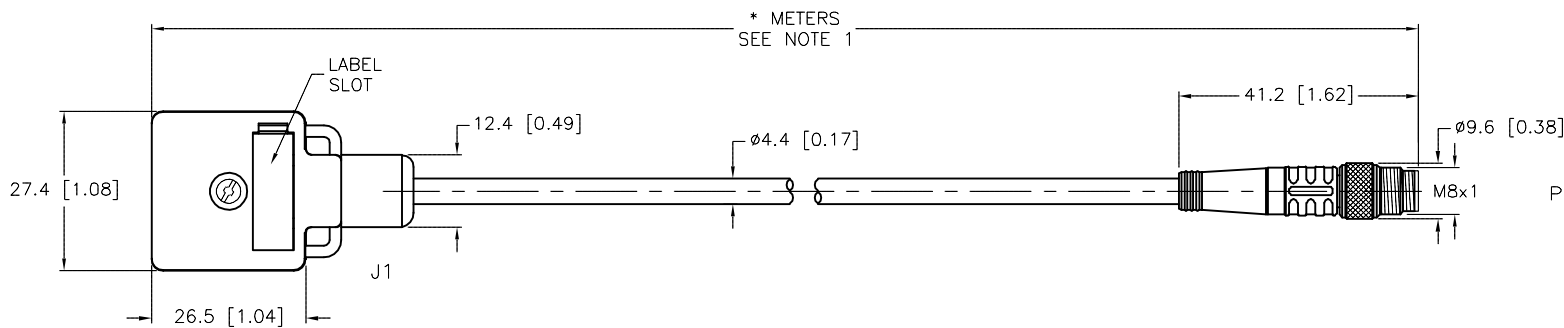

27.4 [1.08]
26.5 [1.04]
12.4 [0.49]
Ø4.4 [0.17]
41.2 [1.62]
Ø9.6 [0.38]
M8x1
P1

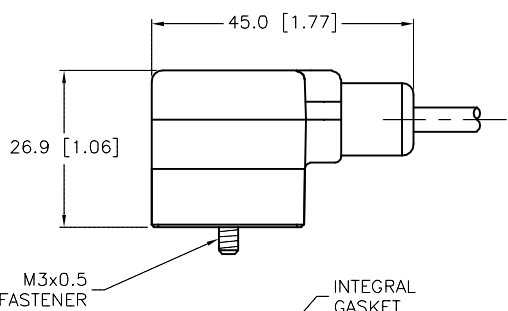

45.0 [1.77]
26.9 [1.06]
M3x0.5 FASTENER
INTEGRAL GASKET

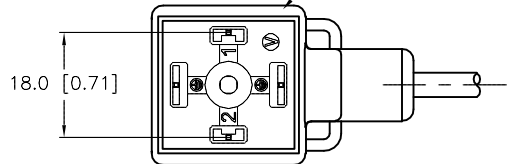

18.0 [0.71]


NOTES:

1. "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RWC
APVD

DATE 08/06/08
SCALE 1=1.3

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us



DESCRIPTION
VAS 22-A642-*M-PSG 3M

IDENTIFICATION NO.
REV
E

E	UPDATE TO NEW VALVE PLUG BODY	RDS	08/23/13	43028
REV	DESCRIPTION	BY	DATE	ECO NO.