



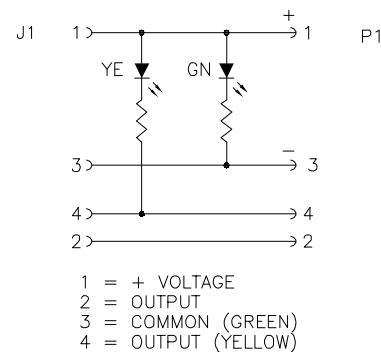



FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																								
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 	 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 		<table><tr><td>CONTACT CARRIER MATERIAL/COLOR</td><td>NYLON OR TPU/BLK (J1), YEL (P1)</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>ELASTOLLAN 1195A-10/CLEAR (J1)</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW (P1)</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>10-30 VDC</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPU/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x22 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +90°C (-40°F to +194°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP68</td></tr></table>	CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLK (J1), YEL (P1)	MOLDED HEAD MATERIAL/COLOR	ELASTOLLAN 1195A-10/CLEAR (J1)	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW (P1)	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	10-30 VDC	OUTER JACKET MATERIAL/COLOR	TPU/GRAY	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	4x22 AWG	TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLK (J1), YEL (P1)																										
MOLDED HEAD MATERIAL/COLOR	ELASTOLLAN 1195A-10/CLEAR (J1)																										
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW (P1)																										
CONTACT MATERIAL/PLATING	BRASS/GOLD																										
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																										
RATED CURRENT [A]	4.0 A																										
RATED VOLTAGE [V]	10-30 VDC																										
OUTER JACKET MATERIAL/COLOR	TPU/GRAY																										
CONDUCTOR INSULATION MATERIAL	PVC																										
NUMBER OF CONDUCTORS [AWG]	4x22 AWG																										
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)																										
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68																										

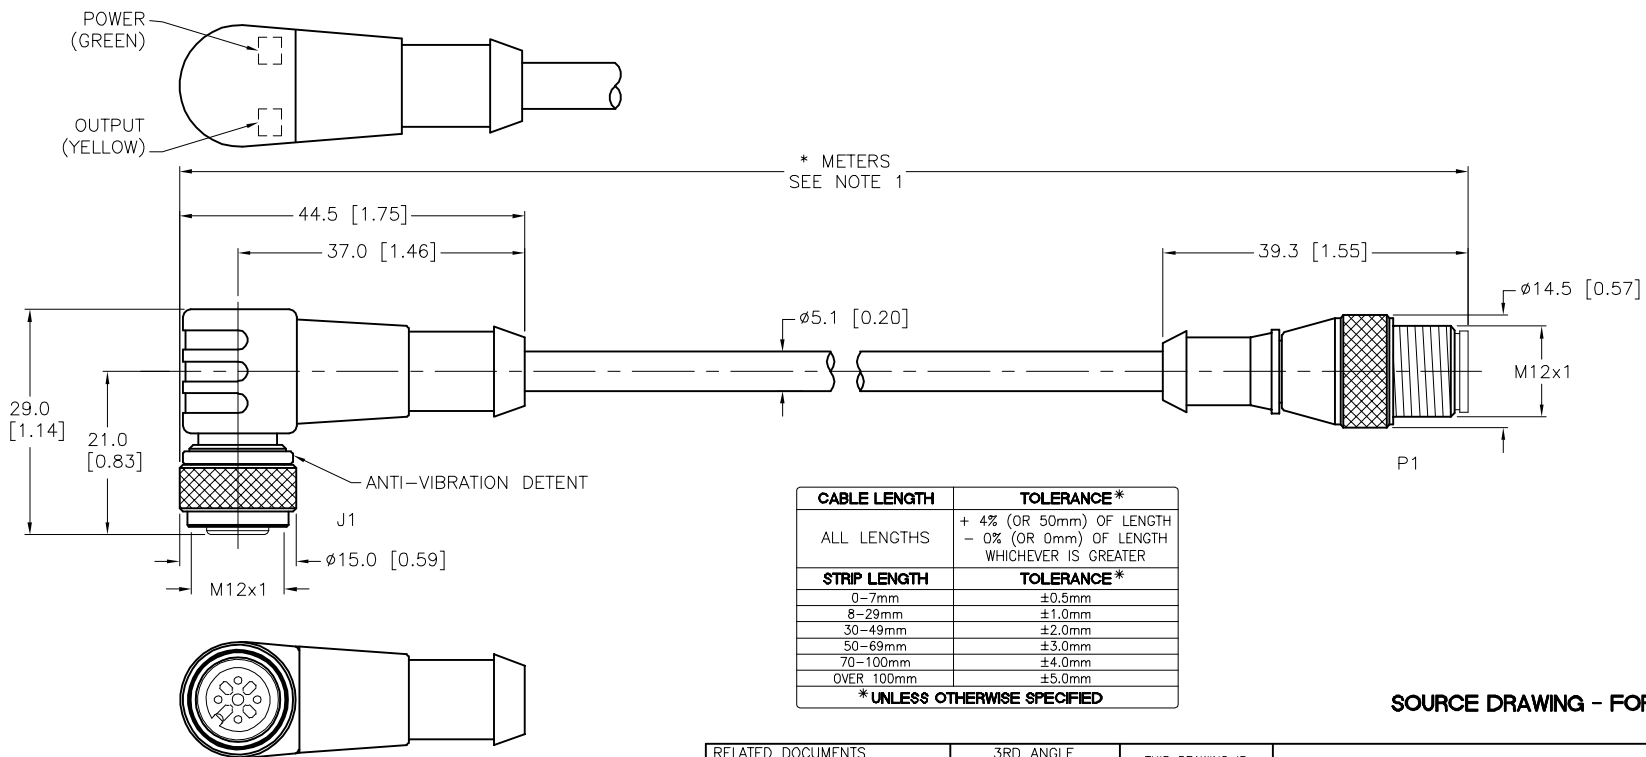

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE JACKET.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT RDS		DATE 08/14/08	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.0	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS					MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		WK 4.4T--N7X2-RS 4.4T/S90	
SEE SPECIFICATIONS									IDENTIFICATION NO.	
									REV	
									F	
F	UPDATE LED REPRESENTATION	NF	04/13/18	65060					FILE: 777022614	
REV	DESCRIPTION	BY	DATE	ECO. NO.					SHEET 1 OF 1	