


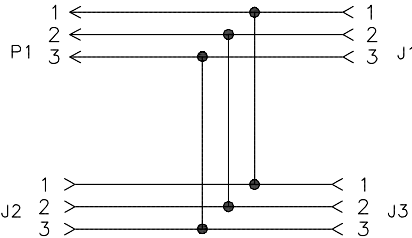


MALE END VIEW (P1)	FEMALE END VIEW (J1-J3)	WIRING DIAGRAM	SPECIFICATIONS																							
 2 (LONG) 1 3 1 = WHITE 2 = GREEN/YELLOW 3 = BLACK  M16 connector	 2 1 3 1 = WHITE 2 = GREEN/YELLOW 3 = BLACK  M16 connector		<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU</td></tr><tr><td>MOLDED BODY MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD (P1), TECU/GOLD (J1-J3)</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>15.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 VAC/VDC</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPE/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>3x14 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C TO +90°C (-40°F TO +194°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	TPU	MOLDED BODY MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD (P1), TECU/GOLD (J1-J3)	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	15.0 A	RATED VOLTAGE [V]	600 VAC/VDC	OUTER JACKET MATERIAL/COLOR	TPE/BLACK	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	3x14 AWG	TEMPERATURE RANGE	-40°C TO +90°C (-40°F TO +194°F)	PROTECTION CLASS	MEETS IEC IP67	
CONTACT CARRIER MATERIAL	TPU																									
MOLDED BODY MATERIAL/COLOR	TPU/BLACK																									
CONTACT MATERIAL/PLATING	BRASS/GOLD (P1), TECU/GOLD (J1-J3)																									
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																									
RATED CURRENT [A]	15.0 A																									
RATED VOLTAGE [V]	600 VAC/VDC																									
OUTER JACKET MATERIAL/COLOR	TPE/BLACK																									
CONDUCTOR INSULATION MATERIAL	PVC																									
NUMBER OF CONDUCTORS [AWG]	3x14 AWG																									
TEMPERATURE RANGE	-40°C TO +90°C (-40°F TO +194°F)																									
PROTECTION CLASS	MEETS IEC IP67																									

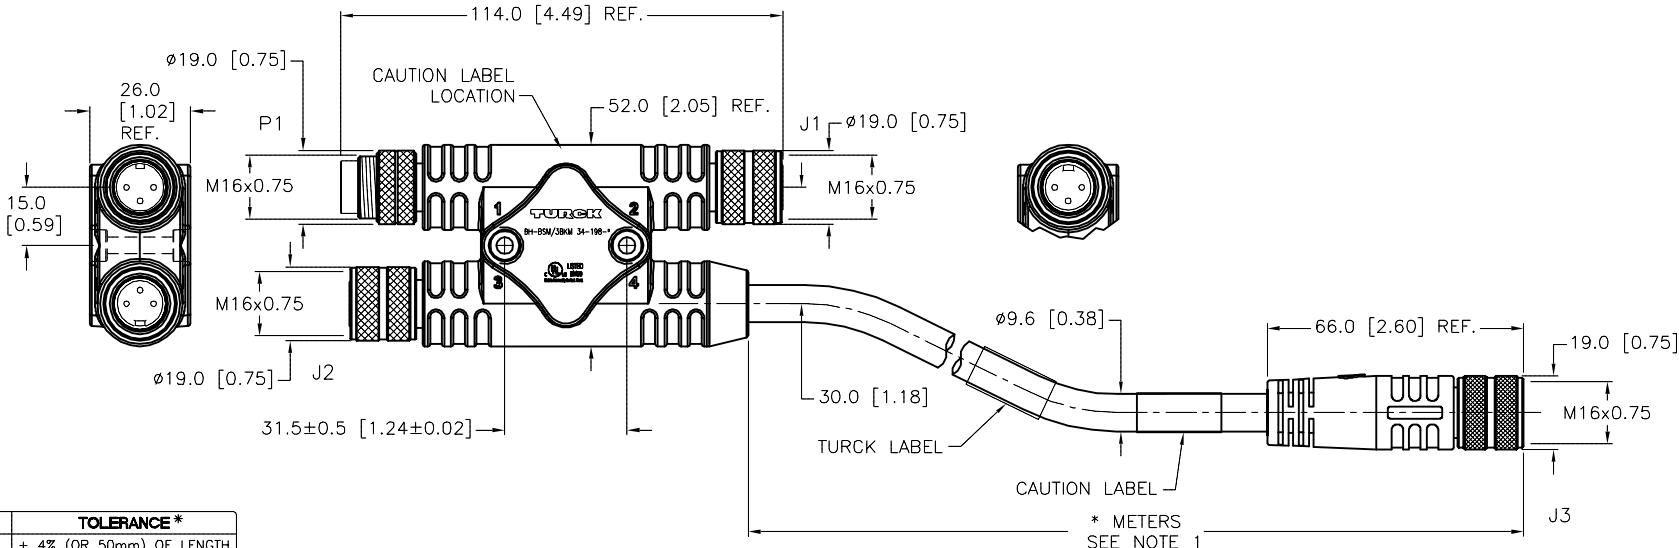


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

**CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT RDS		DATE 09/04/08	
MATERIAL					SEE SPECIFICATIONS		APVD		SCALE 1=2.0	
FINISH					SEE SPECIFICATIONS		UNIT OF MEASUREMENT		DESCRIPTION	
					CONTACT TURCK FOR MORE INFORMATION		MILLIMETERS		BH-BSM/3BKM 34-198-*	
							DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
									REV	
									H	
H UPDATE CONDUCTOR COLOR					NF 07/10/17		60434		FILE: 777022640	
REV DESCRIPTION					BY DATE ECO NO.				SHEET 1 OF 1	