


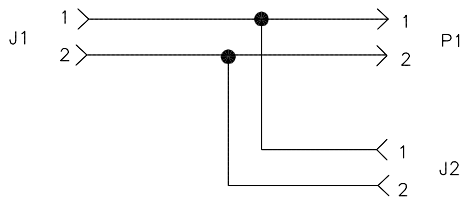


MALE END VIEW (P1)	FEMALE END VIEW (J1&J2)	WIRING DIAGRAM	SPECIFICATIONS	
 1 = WHITE 2 = BLACK	 1 = WHITE 2 = BLACK		CONTACT CARRIER MATERIAL	TPU
 M16 connector			MOLDED BODY MATERIAL/COLOR	TPU/BLACK
 M16 connector			CONTACT MATERIAL/PLATING	BRASS/GOLD (P1), TECU/GOLD (J1-J3)
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	18.0 A
			RATED VOLTAGE [V]	600 V
			OUTER JACKET MATERIAL/COLOR	PVC/BLACK
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	2x12 AWG
			TEMPERATURE RANGE	-40°C TO +90°C (-40°F TO +194°F)
			PROTECTION CLASS	MEETS IEC IP67

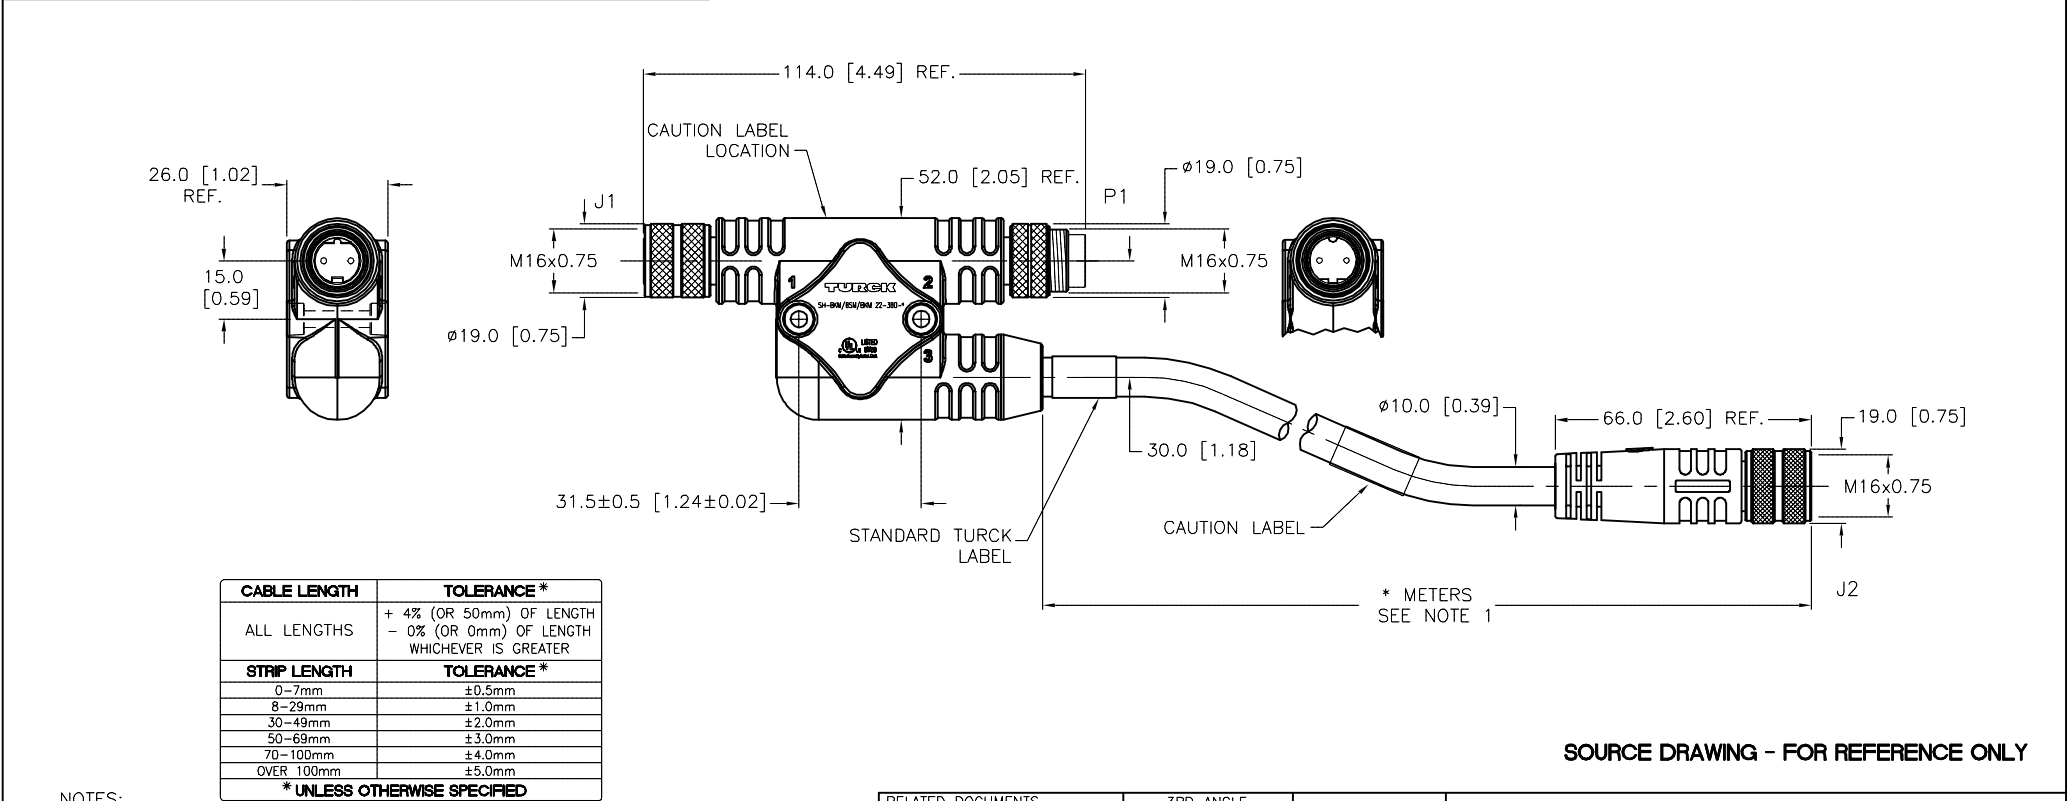

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

**CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

UNLESS OTHERWISE SPECIFIED


1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

!

CAUTION:

RISK OF ELECTRICAL SHOCK

DO NOT DISCONNECT UNDER LOAD

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				TURCK			
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 08/18/08	
SEE SPECIFICATIONS				APVD		SCALE 1=2.0	
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS				MILLIMETERS		SH-BKM/BSM/BKM 22-380-*	
				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
						REV	
						G	
						FILE: 777022648	
						SHEET 1 OF 1	

G	UPDATE CONDUCTOR MATERIAL CALLOUT	RDS	06/13/16	55092
REV	DESCRIPTION	BY	DATE	ECO NO.