


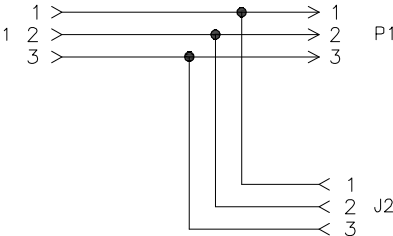


MALE END VIEW (P1)		FEMALE END VIEW (J1,J2)	WIRING DIAGRAM	SPECIFICATIONS																									
 1 = WHITE 2 = GREEN/YELLOW 3 = BLACK		 1 = WHITE 2 = GREEN/YELLOW 3 = BLACK				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU</td></tr><tr><td>MOLDED BODY MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD (P1), TECU/GOLD (J1-J2)</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>15.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 VAC/VDC</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPE/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC/NYLON (NYLON OVERCOAT)</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>3x14 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C TO +90°C (-40°F TO +194°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS IEC IP67</td></tr></table>		CONTACT CARRIER MATERIAL	TPU	MOLDED BODY MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD (P1), TECU/GOLD (J1-J2)	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	15.0 A	RATED VOLTAGE [V]	600 VAC/VDC	OUTER JACKET MATERIAL/COLOR	TPE/BLACK	CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)	NUMBER OF CONDUCTORS [AWG]	3x14 AWG	TEMPERATURE RANGE	-40°C TO +90°C (-40°F TO +194°F)	PROTECTION CLASS	MEETS IEC IP67
CONTACT CARRIER MATERIAL	TPU																												
MOLDED BODY MATERIAL/COLOR	TPU/BLACK																												
CONTACT MATERIAL/PLATING	BRASS/GOLD (P1), TECU/GOLD (J1-J2)																												
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																												
RATED CURRENT [A]	15.0 A																												
RATED VOLTAGE [V]	600 VAC/VDC																												
OUTER JACKET MATERIAL/COLOR	TPE/BLACK																												
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)																												
NUMBER OF CONDUCTORS [AWG]	3x14 AWG																												
TEMPERATURE RANGE	-40°C TO +90°C (-40°F TO +194°F)																												
PROTECTION CLASS	MEETS IEC IP67																												
 M16 connector		 M16 connector																											

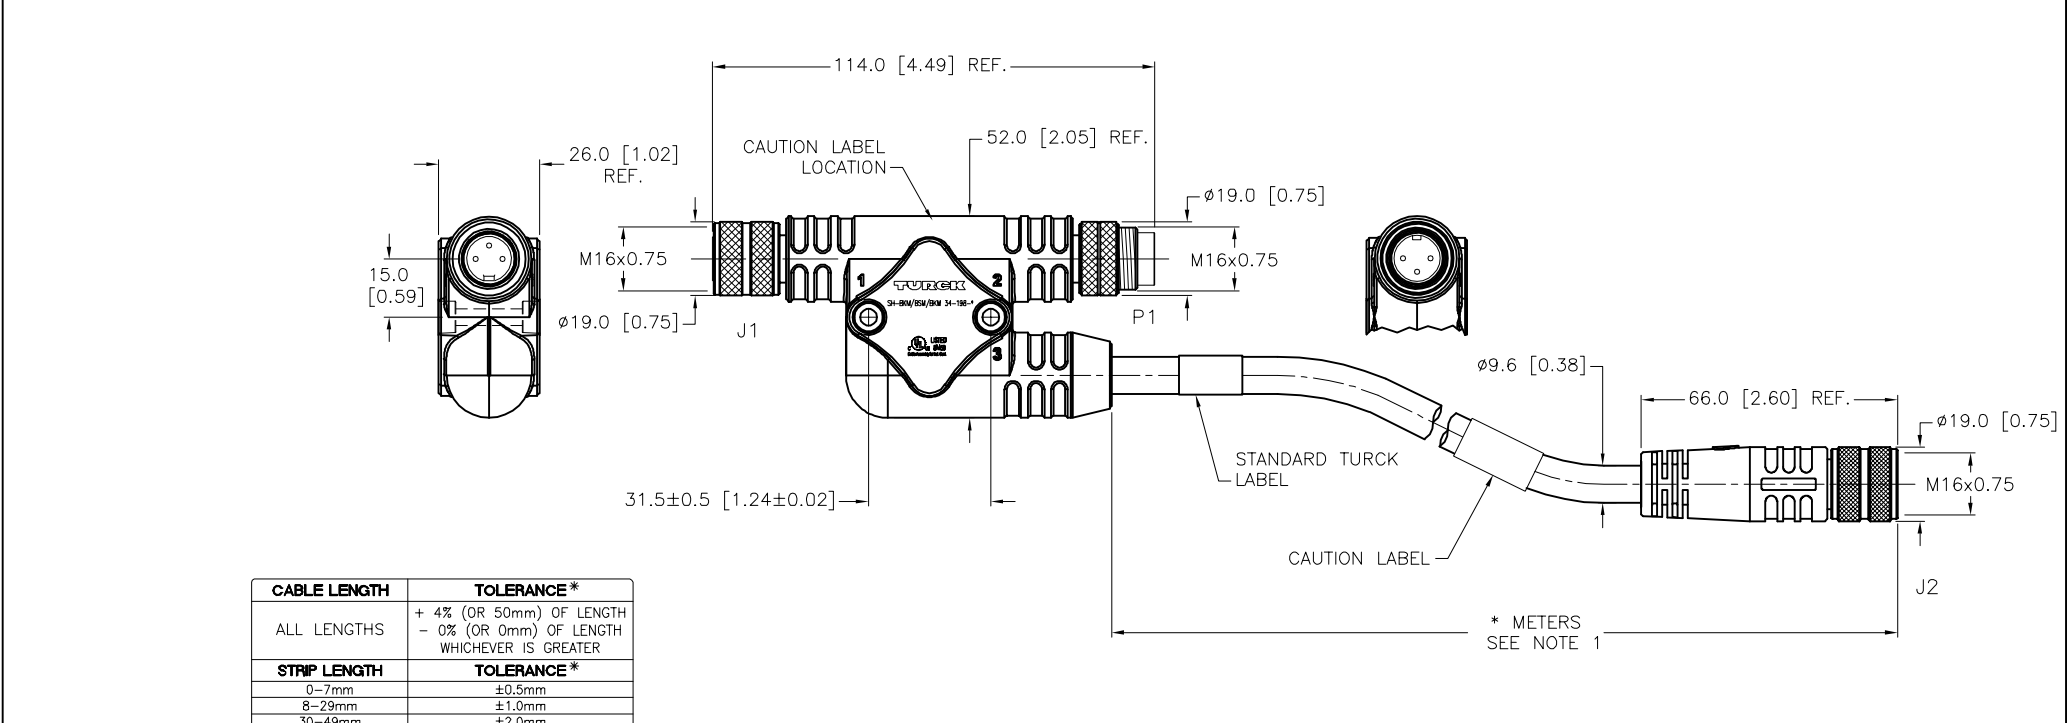


NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

**CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT RDS		DATE 09/04/08	
MATERIAL		SEE SPECIFICATIONS		APVD T.S.		SCALE 1=2.0	
FINISH		SEE SPECIFICATIONS		UNIT OF MEASUREMENT		DESCRIPTION SH-BKM/BSM/BKM 34-198-*	
				CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.	
				DO NOT SCALE THIS DRAWING		REV H	
H UPDATE CONDUCTOR COLOR		NF 07/10/17		60434		FILE: 777022650	
REV DESCRIPTION		BY DATE		ECO NO.		SHEET 1 OF 1	