





MALE END VIEW (P1)	FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
		 1 = WHITE 2 = GREEN/YELLOW 3 = BLACK 4 = RED	MOLDED BODY MATERIAL/COLOR	TPU/BLACK
 M16 connector	 M16 connector	 M16 connector	CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD(P1), TECU/GOLD(J1-J2)
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	15.0 A
			RATED VOLTAGE [V]	600 VAC/VDC
			OUTER JACKET MATERIAL/COLOR	PVC/BLACK
			CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
			NUMBER OF CONDUCTORS [AWG]	4x14 AWG
			TEMPERATURE RANGE	-40°C TO +90°C (-40°F TO +194°F)
			PROTECTION CLASS	MEETS IEC IP67

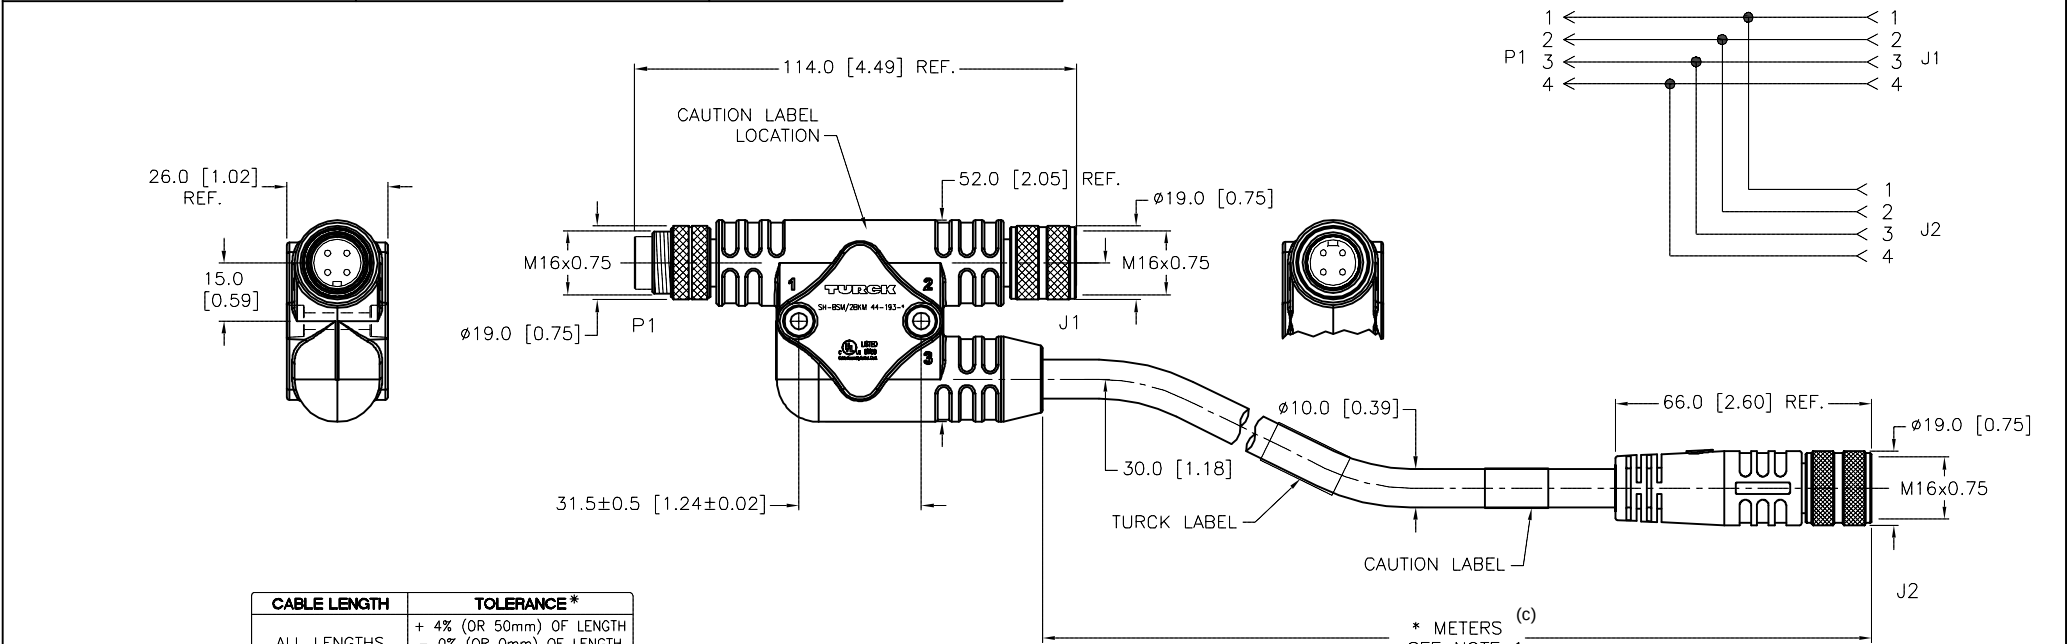


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

NOTES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

**CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.						DRFT RDS		DATE 09/05/08	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=2.0	
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS				SEE SPECIFICATIONS		MILLIMETERS		SH-BSM/2BKM 44-193-*	
DO NOT SCALE THIS DRAWING				IDENTIFICATION NO.		REV		H	
FILE: 777022670				SHEET 1 OF 1					