


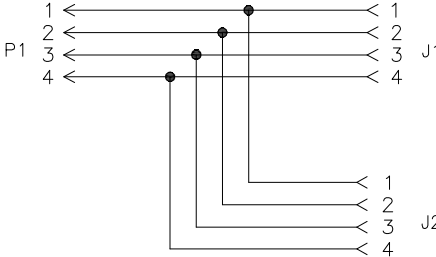


MALE END VIEW (P1)	FEMALE END VIEW (J1-J2)	WIRING DIAGRAM	SPECIFICATIONS																						
 1 = WHITE 2 = GREEN/YELLOW 3 = BLACK 4 = RED	 1 = WHITE 2 = GREEN/YELLOW 3 = BLACK 4 = RED		<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU</td></tr><tr><td>MOLDED BODY MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD (P1), TECU/GOLD (J1,J2)</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>15.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 VAC/VDC</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/BLACK</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC/NYLON (NYLON OVERCOAT)</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x14 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C TO +90°C (-40°F TO +194°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	TPU	MOLDED BODY MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD (P1), TECU/GOLD (J1,J2)	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	15.0 A	RATED VOLTAGE [V]	600 VAC/VDC	OUTER JACKET MATERIAL/COLOR	PVC/BLACK	CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)	NUMBER OF CONDUCTORS [AWG]	4x14 AWG	TEMPERATURE RANGE	-40°C TO +90°C (-40°F TO +194°F)	PROTECTION CLASS	MEETS IEC IP67
CONTACT CARRIER MATERIAL	TPU																								
MOLDED BODY MATERIAL/COLOR	TPU/BLACK																								
CONTACT MATERIAL/PLATING	BRASS/GOLD (P1), TECU/GOLD (J1,J2)																								
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																								
RATED CURRENT [A]	15.0 A																								
RATED VOLTAGE [V]	600 VAC/VDC																								
OUTER JACKET MATERIAL/COLOR	PVC/BLACK																								
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)																								
NUMBER OF CONDUCTORS [AWG]	4x14 AWG																								
TEMPERATURE RANGE	-40°C TO +90°C (-40°F TO +194°F)																								
PROTECTION CLASS	MEETS IEC IP67																								

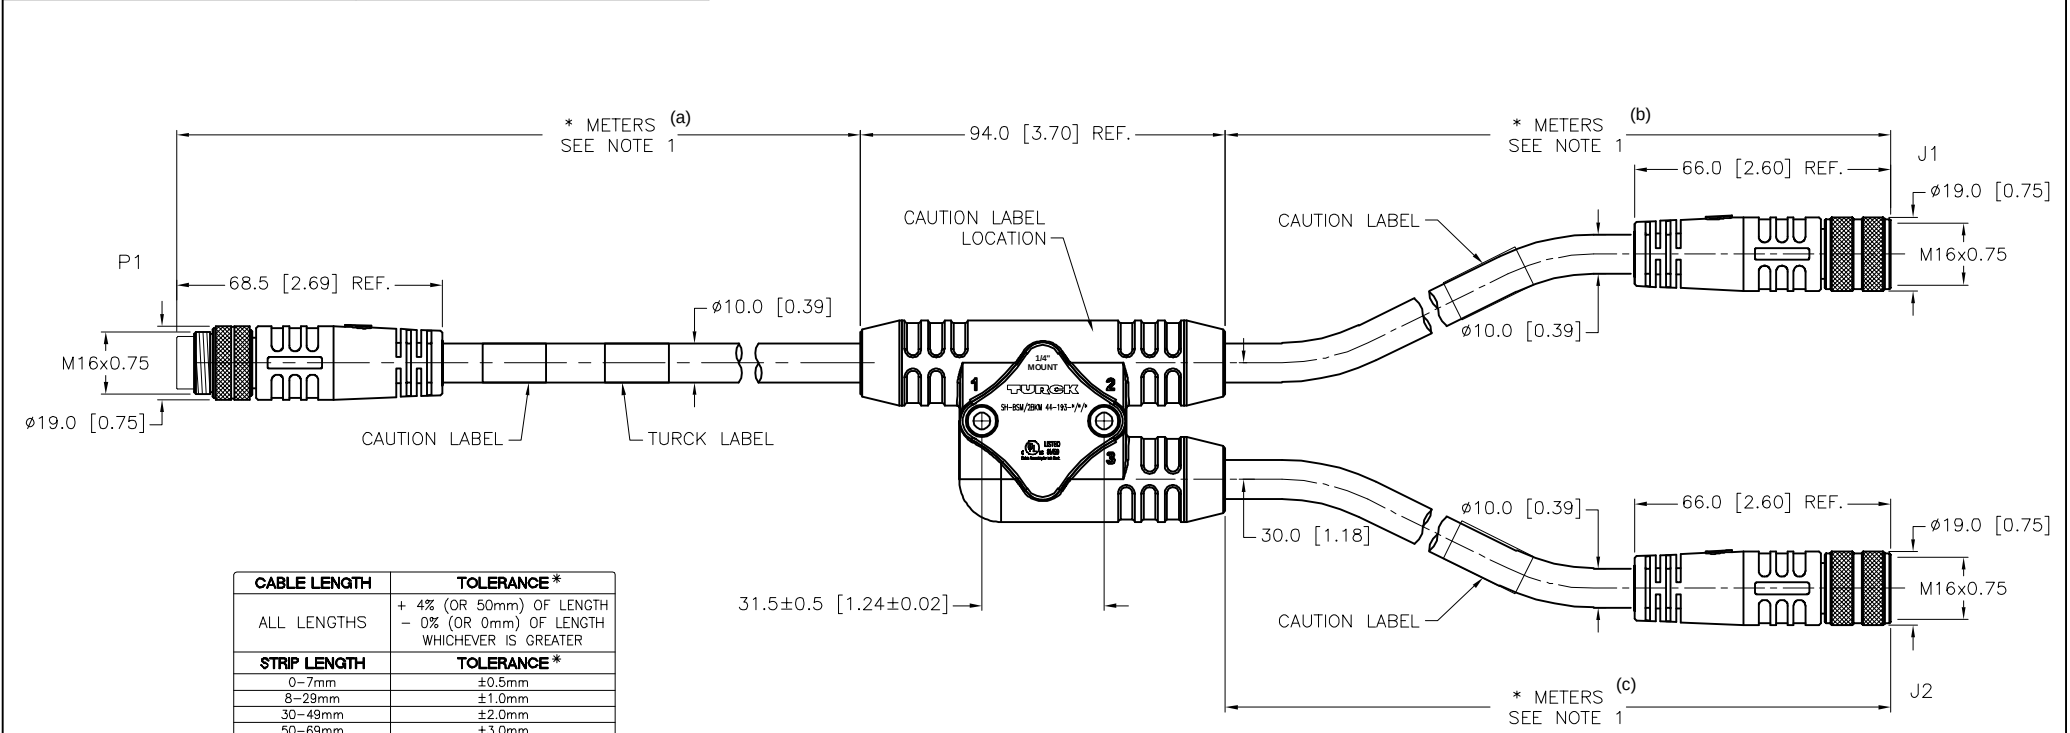

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

CAUTION:

RISK OF ELECTRICAL SHOCK

DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT RDS		DATE 09/04/08	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=2.0	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS					SEE SPECIFICATIONS		MILLIMETERS		SH-BSM/2BKM 44-193-*/**/ (a) (b) (c)	
DO NOT SCALE THIS DRAWING					IDENTIFICATION NO.		REV		G	
FILE: 777022671					SHEET 1 OF 1					

G	UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO	TV	08/15/17	60452
REV	DESCRIPTION	BY	DATE	ECO NO.