


SPECIFICATIONS					
CONTACT CARRIER MATERIAL	TPV				
MOLDED HEAD MATERIAL/COLOR	TPV/WHITE				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED				
RATED CURRENT [A]	4.0 A				
RATED VOLTAGE [V]	250 V				
CABLE JACKET MATERIAL/COLOR	TPV/WHITE				
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER				
NUMBER OF CONDUCTORS [AWG]	4x22 AWG				
DRAIN/SHIELD	24 AWG/ALUMINIZED FOIL				
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P and IEC IP68				

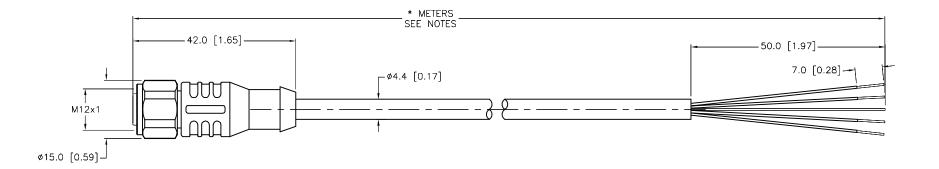

CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE *				
0-7mm	±0.5mm				
8–29mm	±1.0mm				
30-49mm	±2.0mm				
50–69mm	±3.0mm				
70–100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OTHERWISE SPECIFIED					

## SOURCE DRAWING - FOR REFERENCE ONLY

	RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	<b>TURCK IAC</b> High Technology Sensors and Automation Controls (763) 553-7300				
	MATERIAL		DRFT RDS	DATE 10/28/08	DESCRIPTION WD-RKCV 4.4	T */CC10		
	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS			+.41=*/3010			
		DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	ASUREMENT	IDENTIFICATION NO.	REV		
	FINISH	CONTACT TURCK		ER [ INCH ]	IDENTIFICATION NO.			
73	SEE SPECIFICATIONS	FOR MORE INFORMATION				G		
0.			DO NOT SCALE	THIS DRAWING	FILE: 777023144	SHEET 1 OF 1		

NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2.  $\ref{scalar}$  designates cable with shield and drain wire. Drain wire not connected at plug.

			FINISH	REFERENCE ONLY CONTACT TURCK	MILLIMETER [ INCH ]	IDENTIFICATION NO.			
G	UPDATE MATERIAL SPECIFICATIONS	NF	07/21/15	50673	SEE SPECIFICATIONS	FOR MORE INFORMATION			
REV	DESCRIPTION	BY	DATE	ECO NO.			DO NOT SCALE THIS DRAWING	FILE: 777023144	SHEET