



MALE END VIEW



1 = BROWN	15 = BLUE
2 = WHITE/GREY	16 = BLACK/GREY
3 = BLUE/GREY	17 = BROWN/ORANGE
4 = BROWN/GREY	18 = WHITE/ORANGE
5 = BLACK/YELLOW	19 = BLACK/ORANGE
6 = WHITE/YELLOW	20 = BLACK/GREEN
7 = BLUE/YELLOW	21 = WHITE/GREEN
8 = BROWN/YELLOW	22 = BLUE/GREEN
9 = BLACK/RED	23 = BROWN/GREEN
10 = WHITE/RED	24 = BLUE/ORANGE
11 = BLUE/RED	25 = GREEN/YELLOW
12 = BROWN/RED	26 = N/C
13 = BLACK	
14 = WHITE	DRAIN/SHIELD

SPECIFICATIONS


CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	25x22 AWG
DRAIN/SHIELD	22 AWG/FOIL
PROTECTION CLASS	IEC IP67
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)

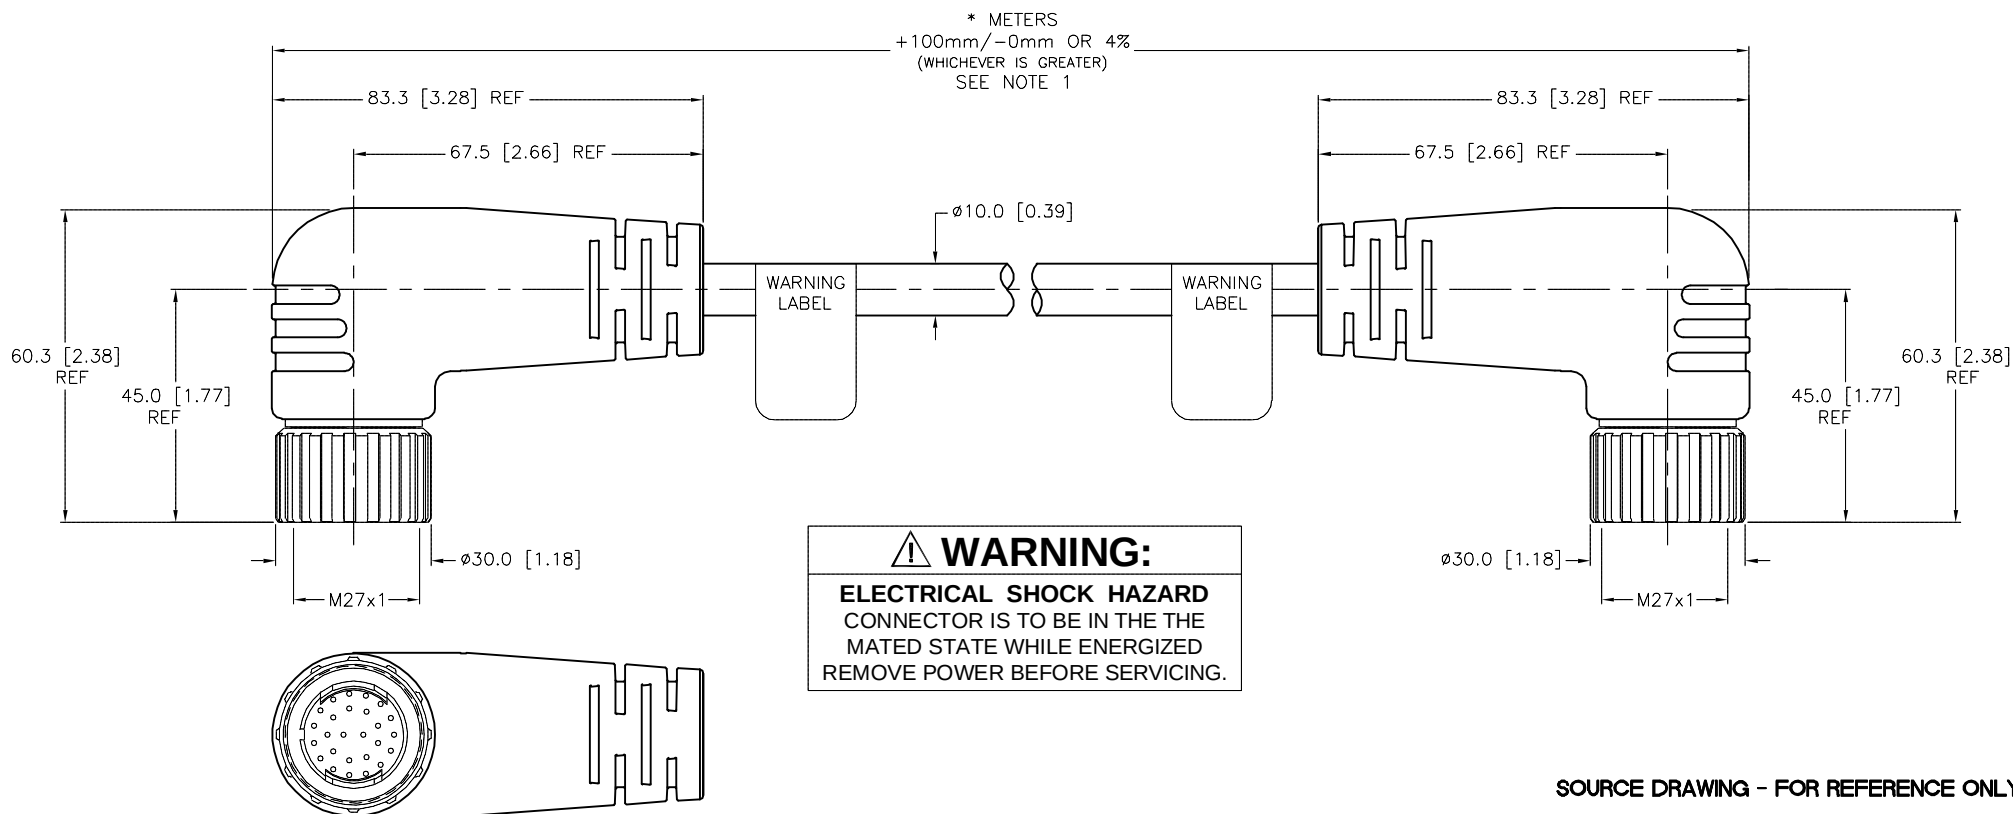

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS	DATE 11/12/08	DESCRIPTION DSWM DSWM 26-631-*	
FINISH SEE SPECIFICATIONS			APVD	SCALE 1=1.5		
		UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.	REV E
		DO NOT SCALE THIS DRAWING			FILE: 777023316	SHEET 1 OF 1

E	ADD LABEL PER ECO	TV	01/26/18	63893
REV	DESCRIPTION	BY	DATE	ECO NO.