


MALE END VIEW




1 = BROWN
2 = WHITE
3 = BLUE
4 = BLACK



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	POLYESTER/BLACK
MOLDED HEAD MATERIAL/COLOR	POLYESTER/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER CABLE JACKET MATERIAL/COLOR	PTFE/WHITE
CONDUCTOR INSULATION MATERIAL	PTFE
NUMBER OF CONDUCTORS [AWG]	5x22 AWG
TEMPERATURE RANGE	-20°C to +150°C (-4°F to +302°F)
PROTECTION CLASS	IP65

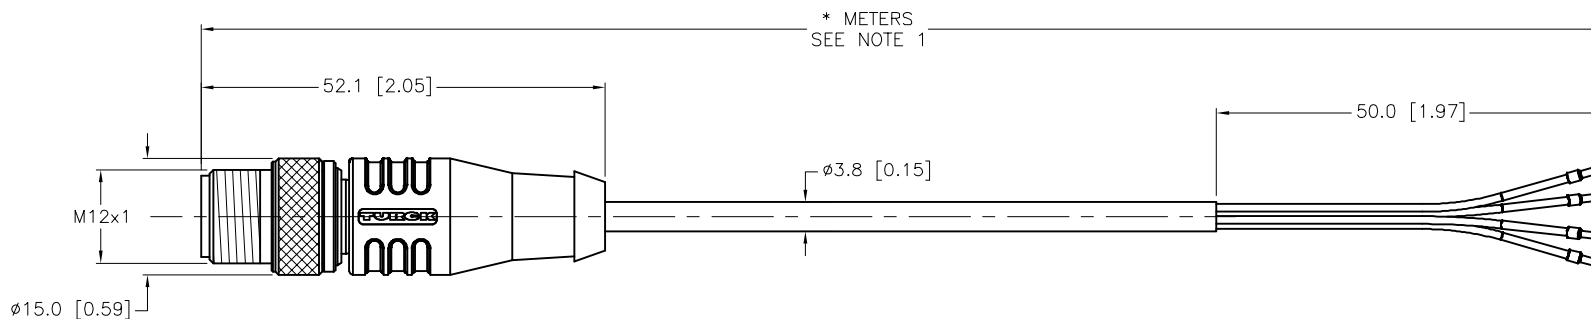


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- CONDUCTORS ARE STRIPPED AND CRIMPED WITH NON-INSULATING FERRULES, INSTEAD OF TINNING.
- GRAY CONDUCTOR IS NOT CONNECTED AND TRIMMED BACK TO CABLE JACKET.
- "/S849" DESIGNATES 22AWG CONDUCTORS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
									
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	NF	DATE	03/11/22	DESCRIPTION HT-RSC 4.4T-*/S849			
SEE SPECIFICATIONS		APVD		SCALE	1=1.0				
FINISH		UNIT OF MEASUREMENT				IDENTIFICATION NO.			
SEE SPECIFICATIONS		MILLIMETER [INCH]							
		DO NOT SCALE THIS DRAWING				FILE: 777023384			
								SHEET 1 OF 1	
		CONTACT TURCK FOR MORE INFORMATION					REV		
							A		

A	DRAWING RELEASE	NF	03/14/22	
REV	DESCRIPTION	BY	DATE	ECO. NO.