


FEMALE END VIEW

1 = BROWN
2 = WHITE
3 = BLUE
4 = BLACK
5 = GREY

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	POLYESTER/BLACK
MOLDED HEAD MATERIAL/COLOR	POLYESTER/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	250 V
OUTER CABLE JACKET MATERIAL/COLOR	PTFE/WHITE
CONDUCTOR INSULATION MATERIAL	PTFE
NUMBER OF CONDUCTORS [AWG]	5x22 AWG
TEMPERATURE RANGE	-20°C to +150°C (-4°F to +302°F)
PROTECTION CLASS	IP65

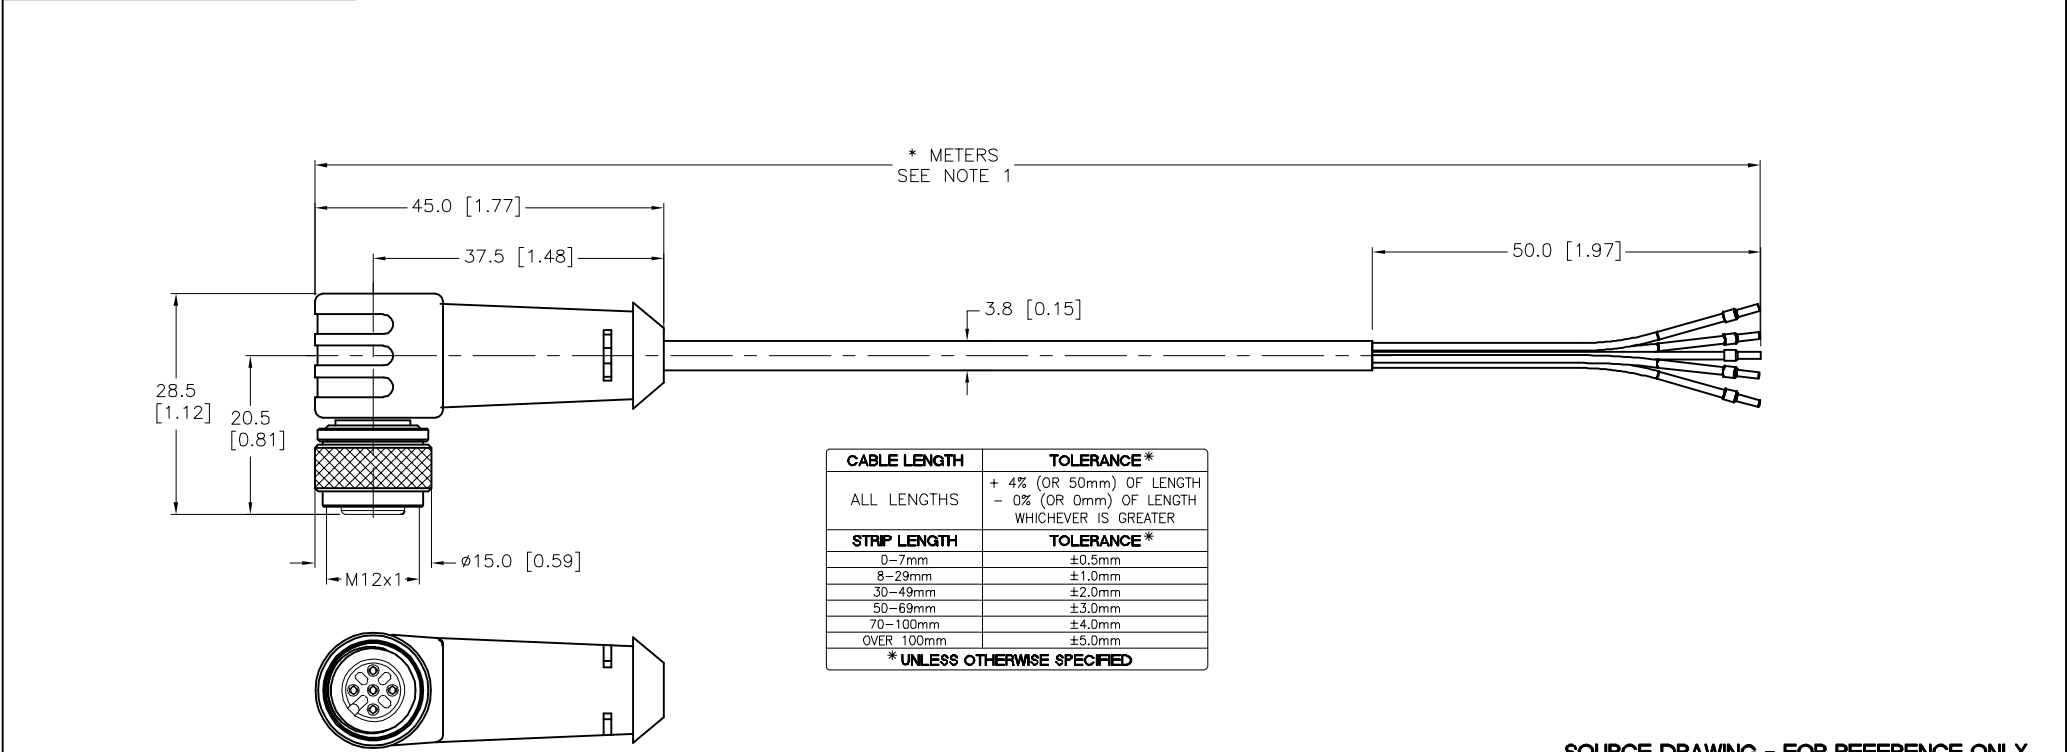

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. CONDUCTORS ARE STRIPPED AND CRIMPED WITH NON-INSULATING FERRULES, INSTEAD OF TINNING.

3. "/S849" DESIGNATES 22AWG CONDUCTORS.

RELATED DOCUMENTS

1.
2.
3.
4.

MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RDS
APVD

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

DESCRIPTION
HT-WKC 4.5T-* /S849

IDENTIFICATION NO.
FILE: 777023387

REV
B

SHEET 1 OF 1

B	UPDATE MOLD BODY	RDS	10/29/14	47776
REV	DESCRIPTION	BY	DATE	ECO. NO.