






FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
				CONTACT CARRIER MATERIAL/COLOR	POLYESTER/BLACK
1 = BROWN		1 = BROWN		MOLDED HEAD MATERIAL/COLOR	POLYESTER/BLACK
2 = WHITE		2 = WHITE		CONTACT MATERIAL/PLATING	BRASS/GOLD
3 = BLUE		3 = BLUE		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
4 = BLACK		4 = BLACK		RATED CURRENT [A]	4.0 A
5 = GREY		5 = GREY		RATED VOLTAGE [V]	250 V
				OUTER CABLE JACKET MATERIAL/COLOR	PTFE/WHITE
				CONDUCTOR INSULATION MATERIAL	PTFE
				NUMBER OF CONDUCTORS [AWG]	5x22 AWG
				TEMPERATURE RANGE	-20°C to +150°C (-4°F to +302°F)
				PROTECTION CLASS	IP65




CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

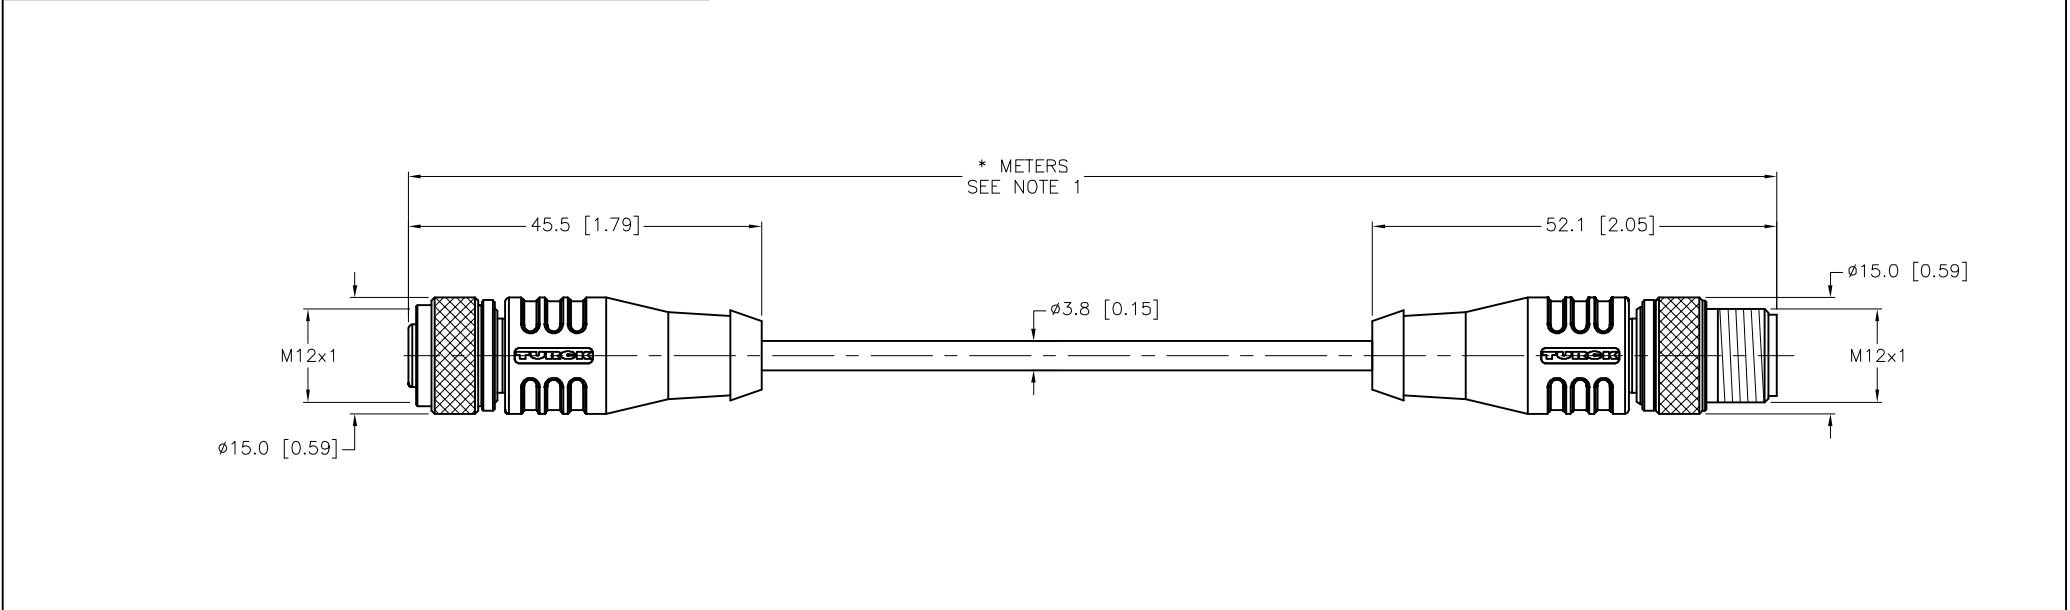1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S849" DESIGNATES 22AWG CONDUCTORS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT RDS		DATE 12/17/08	
MATERIAL		SEE SPECIFICATIONS		APVD		SCALE 1=1.0	
FINISH		SEE SPECIFICATIONS		UNIT OF MEASUREMENT		DESCRIPTION	
				MILLIMETER [INCH]		HT-RKC 4.5T-*--RSC 4.5T/S849	
				CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.	
				DO NOT SCALE THIS DRAWING		REV A	
A DRAWING RELEASE		RDS 01/15/09		FILE: 777023564		SHEET 1 OF 1	
REV DESCRIPTION		BY DATE ECO NO.					