





MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK
			MOLDED MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	35.0 A
			RATED VOLTAGE [V]	600 V
			CABLE JACKET MATERIAL/COLOR	PVC/BLACK
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBERS OF CONDUCTORS [AWG]	4x10 AWG
			TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

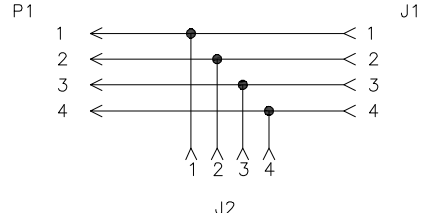

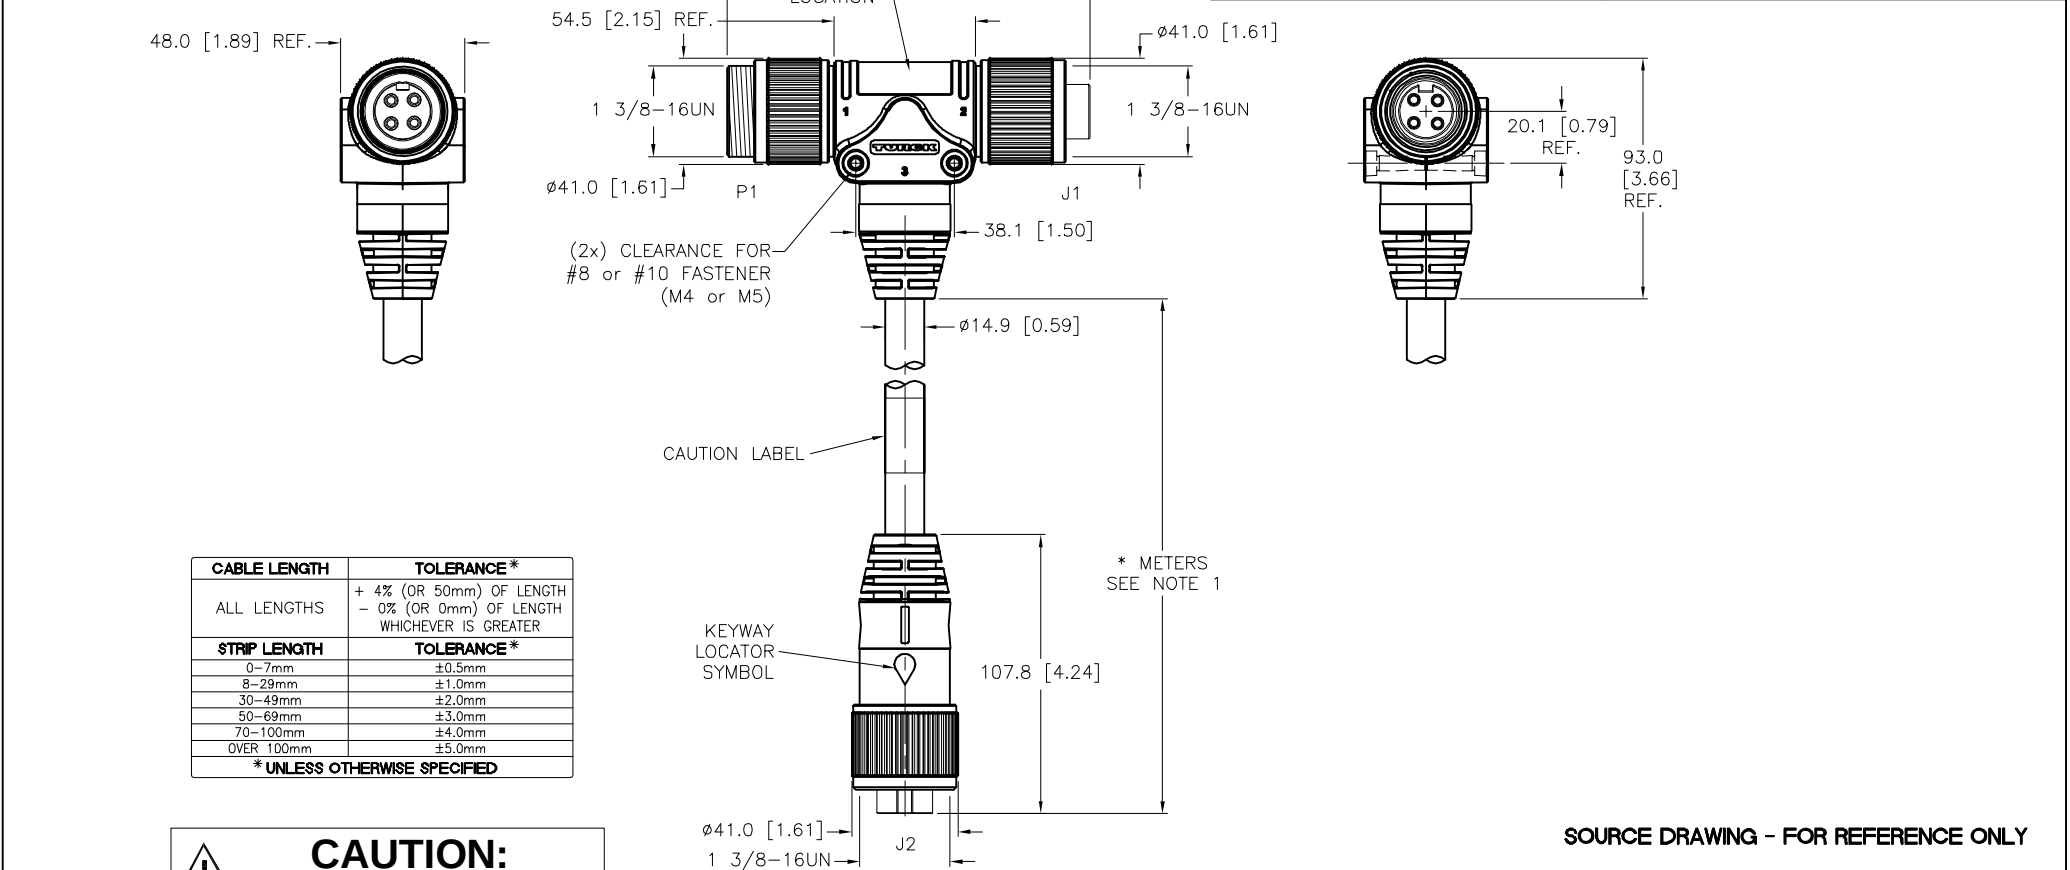


CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S4000" DESIGNATES TC-ER CABLE.

C	UPDATE RATED CURRENT PER ECO	TR	04/12/19	69350
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
		DRFT	RWC	DATE	04/16/09
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD		SCALE	1=3.0
FINISH		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [INCH]		GSDM/2GKDM 40-*/S4000	
SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	REV
				FILE: 777023841	C
				SHEET 1 OF 1	