


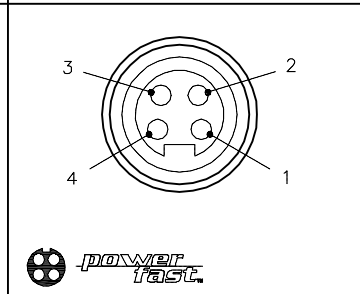
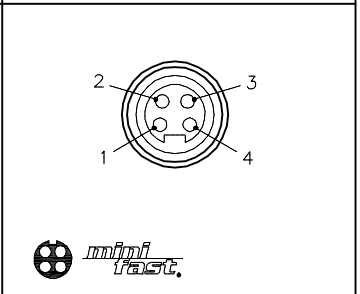



MALE END VIEW		FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	PVC
				MOLDED MATERIAL/COLOR	PVC/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	35 A COMBINED, 18 A DROP
				RATED VOLTAGE [V]	600 V
				CABLE JACKET MATERIAL/COLOR	PVC/BLACK
				CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
				NUMBERS OF CONDUCTORS [AWG]	4x14 AWG
				TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

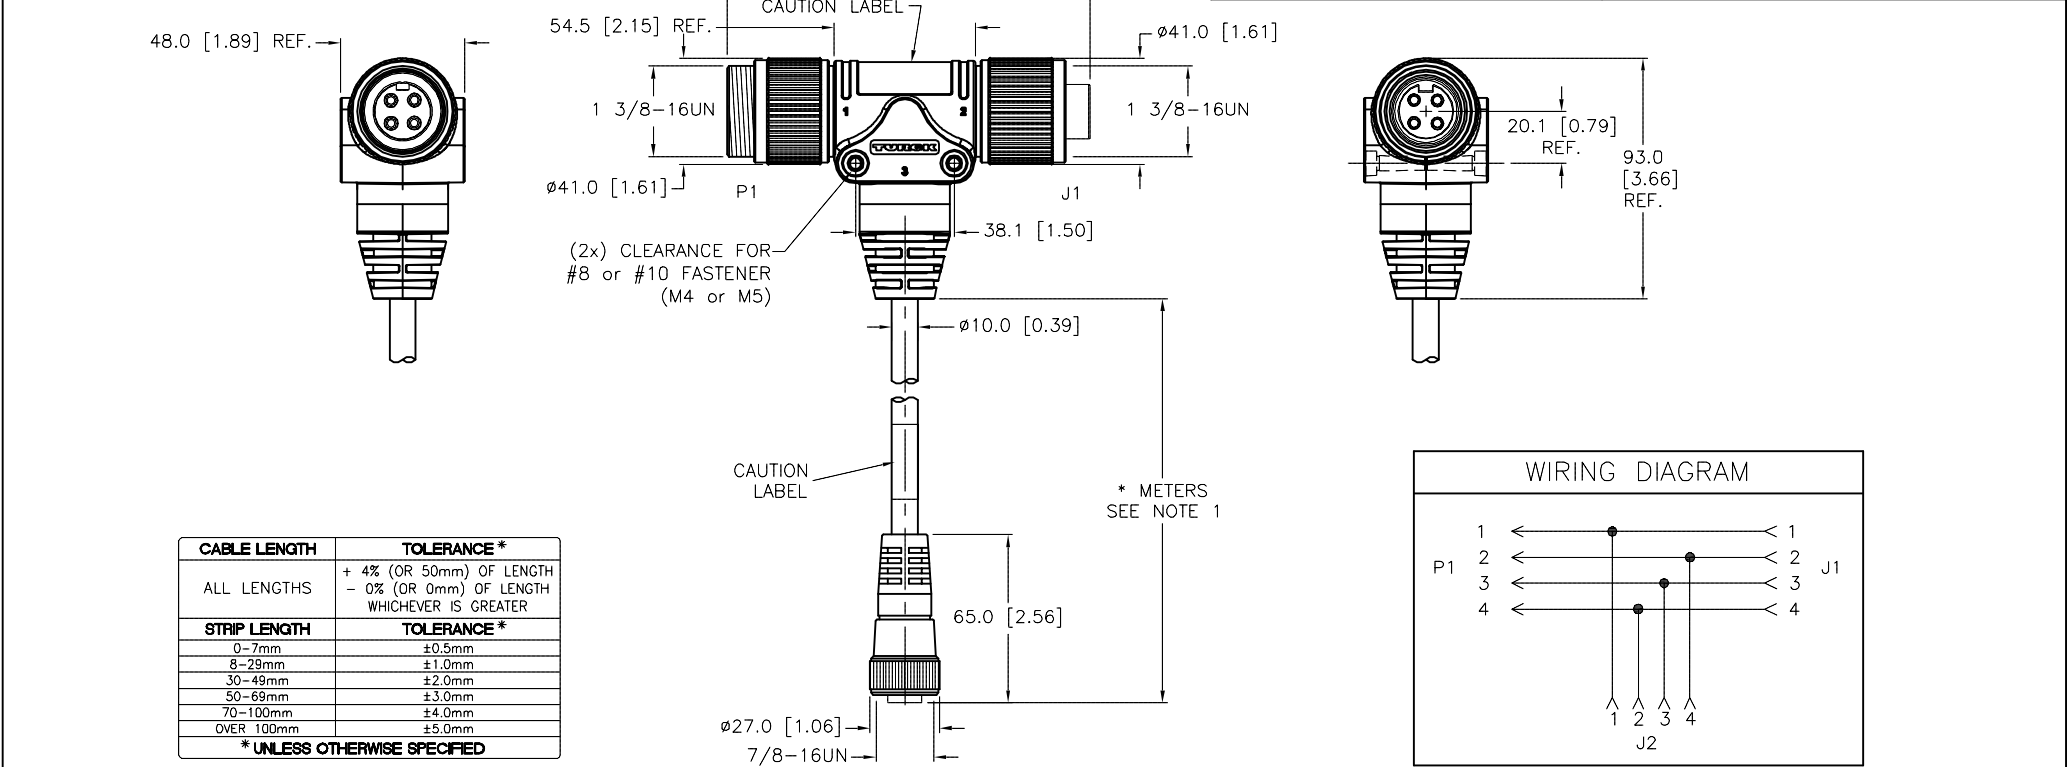

 **CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

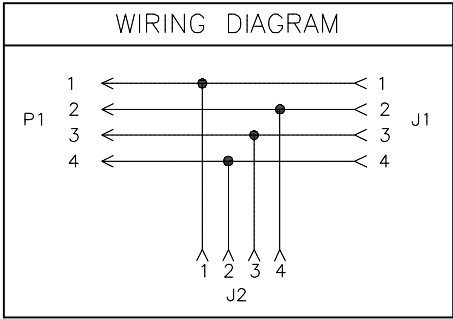

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					1.				DRFT RWC		DATE 04/16/09	
2. "/S4000" DESIGNATES TC-ER CABLE.					2.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=3.0	
					3.		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
					4.				MILLIMETER [INCH]		GSDM/GKDM/RKM 44-*/S4000	
					MATERIAL				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
					SEE SPECIFICATIONS						REV	
					FINISH						F	
					SEE SPECIFICATIONS						FILE: 777023852	
											SHEET 1 OF 1	
F UPDATE RATED CURRENT					NF 04/26/19		69357					
REV DESCRIPTION					BY DATE		ECO NO.					