


SPECIFICATIONS				
CONTACT CARRIER MATERIAL	PVC			
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	18.0 A			
RATED VOLTAGE [V]	600 VAC			
CABLE JACKET MATERIAL/COLOR	PVC/BLACK			
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)			
NUMBER OF CONDUCTORS [AWG]	4x14 AWG			
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)			
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K			
APPROVALS AND CERTIFICATIONS	UL 2237, CE			

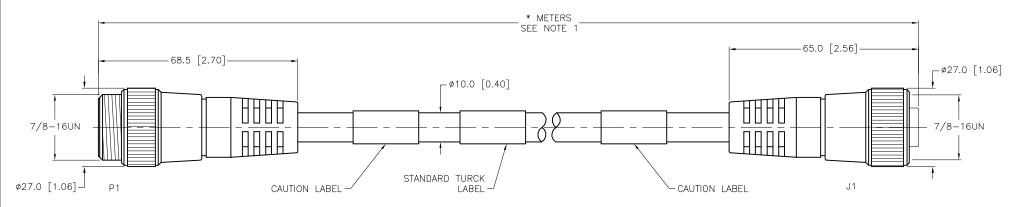

CABLE LENGTH	TOLERANCE *		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		
STRIP LENGTH	TOLERANCE *		
0-7mm	±0.5mm		
8-29mm	±1.0mm		
30-49mm	±2.0mm		
50-69mm	±3.0mm		
70-100mm	±4.0mm		
OVER 100mm	±5.0mm		
* UNLESS OTHERWISE SPECIFIED			

ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER		
STRIP LENGTH	TOLERANCE *		
0-7mm	±0.5mm		
8-29mm	±1.0mm		
30-49mm	±2.0mm		
50-69mm	±3.0mm		
70-100mm	±4.0mm		
OVER 100mm	±5.0mm		
* LINI ESS OTHERWISE SPECIFIED			

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S4000" DESIGNATES TC-ER CABLE.

L	UPDATE PROTECTION CLASS	СВМ	04/13/21	76628
REV	DESCRIPTION	BY	DATE	ECO NO.

CAUTION: RISK OF ELECTRICAL SHOCK DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	1	RCK	3000 CAMPUS MINNEAPOLIS, M 1-800-544- (763) 553- (763) 553-0 www.turck.	N 55441 7769 7300 0708 fax
MATERIAL		DRFT RDS	DATE 03/11/09	DESCRIPTION RSM RKM 44-	*** /51000	
	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.3	KSW KKW 44-	- 101/ 34000	
	DRAWING ARE FOR	UNIT OF ME	ASUREMENT	1		
FINISH	REFERENCE ONLY	OTATI OT ME	NOONEMENT	IDENTIFICATION NO.		REV
- Initiali	CONTACT TURCK FOR MORE	MILLIMETE	ER [INCH]			L
_	INFORMATION					<u> </u>
		DO NOT SCALE	THIS DRAWING	FILE: 777023897	SHEET	f 1 OF 1