


VALVE END VIEW



1 = BLACK #1
2 = BLACK #2
GND = N/C

WIRING DIAGRAM


J1

J2

1 → 1
2 → 2
GND → N/C
GND → N/C

N/C → 3
N/C → 4

FEMALE END VIEW




1 = BLACK #1
2 = BLACK #2
3 = N/C
4 = N/C



SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON or TPU
CONTACT MATERIAL/PLATING	BRASS/SILVER (J1), BRASS/GOLD (J2)
MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLK (J1), YEL (J2)
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (J2)
RATED CURRENT	4.0 A
RATED VOLTAGE	0-220 VAC/DC
OUTER JACKET MATERIAL/COLOR	PVC/GRAY
CONDUCTOR INSULATION	PVC
NUMBER OF CONDUCTORS	3x18 AWG
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

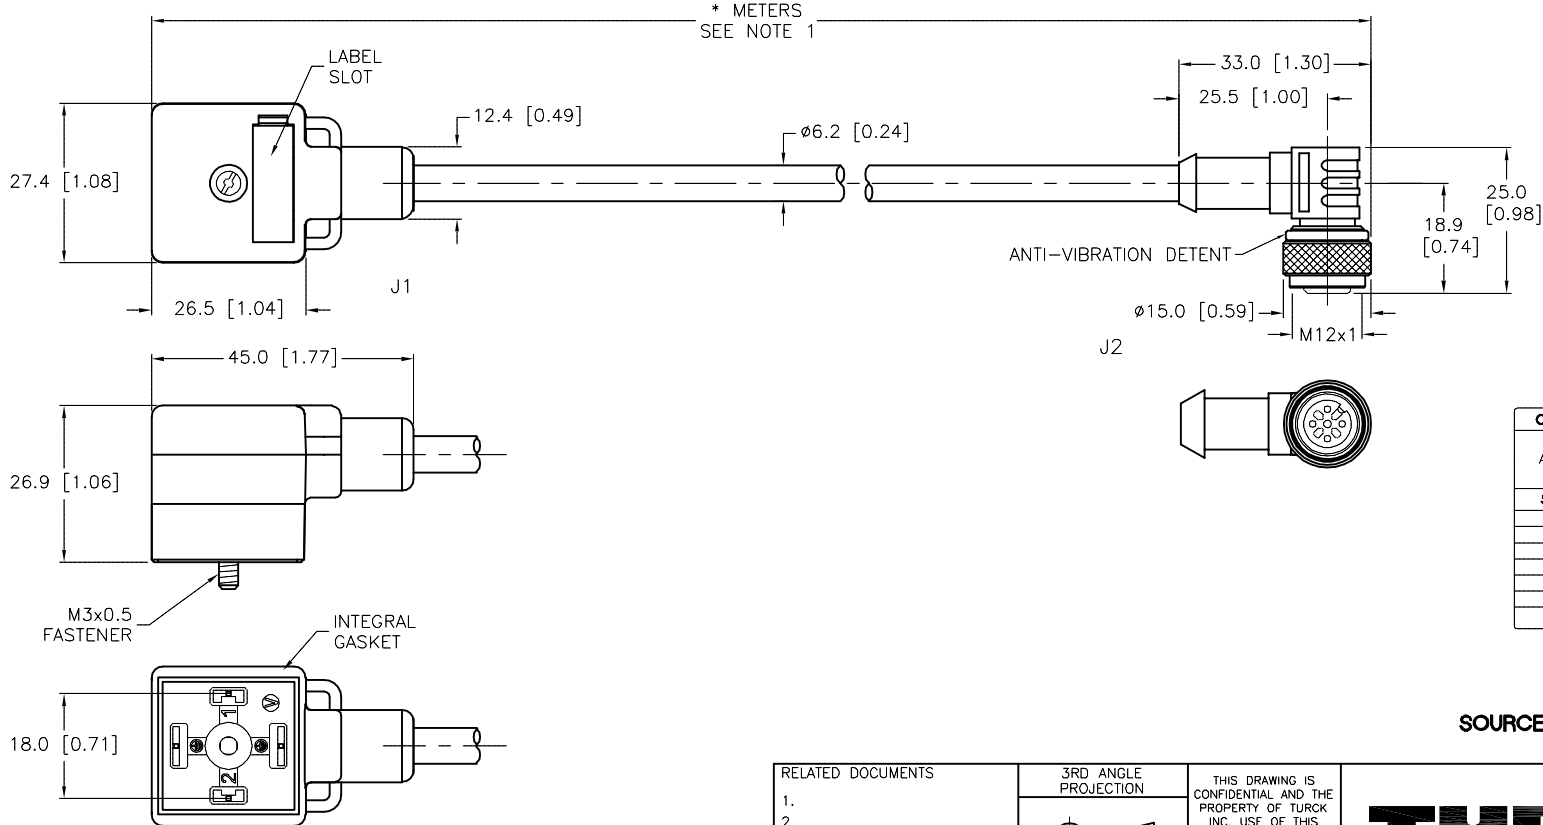

* METERS
SEE NOTE 1

27.4 [1.08]
26.5 [1.04]
12.4 [0.49]
45.0 [1.77]
26.9 [1.06]
18.0 [0.71]
33.0 [1.30]
25.5 [1.00]
25.0 [0.98]
18.9 [0.74]
ø6.2 [0.24]
ø15.0 [0.59]
M12x1

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/CS12305" DESIGNATES CUSTOM WIRING.

RELATED DOCUMENTS

1.
2.
3.
4.


MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE PROJECTION



ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RWC
APVD

DATE 02/10/09
SCALE 1=1.3

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

TURCK

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

DESCRIPTION
VAS 22-A653-*M-WK 4.4T/CS12305

IDENTIFICATION NO.

REV
C

C

UPDATE VALVE PLUG MOLD BODY DESIGN

RDS

02/08/13

41241

REV

DESCRIPTION

BY

DATE

ECO NO.

FILE: 777024064

SHEET 1 OF 1