






FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS																							
 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GRAY</p>	 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GRAY</p>	<table><tr><td>CONTACT CARRIER MATERIAL/COLOR</td><td>TPV/BLACK</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPV/WHITE</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>CABLE JACKET MATERIAL/COLOR</td><td>TPV/WHITE</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>POLYESTER ELASTOMER</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>5x22 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP68</td></tr></table>	CONTACT CARRIER MATERIAL/COLOR	TPV/BLACK	MOLDED HEAD MATERIAL/COLOR	TPV/WHITE	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	STAINLESS STEEL/PASSIVATED	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	CABLE JACKET MATERIAL/COLOR	TPV/WHITE	CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER	NUMBER OF CONDUCTORS [AWG]	5x22 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68	
CONTACT CARRIER MATERIAL/COLOR	TPV/BLACK																								
MOLDED HEAD MATERIAL/COLOR	TPV/WHITE																								
CONTACT MATERIAL/PLATING	BRASS/GOLD																								
COUPLING NUT MATERIAL/PLATING	STAINLESS STEEL/PASSIVATED																								
RATED CURRENT [A]	4.0 A																								
RATED VOLTAGE [V]	250 V																								
CABLE JACKET MATERIAL/COLOR	TPV/WHITE																								
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER																								
NUMBER OF CONDUCTORS [AWG]	5x22 AWG																								
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																								
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68																								
																									





CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

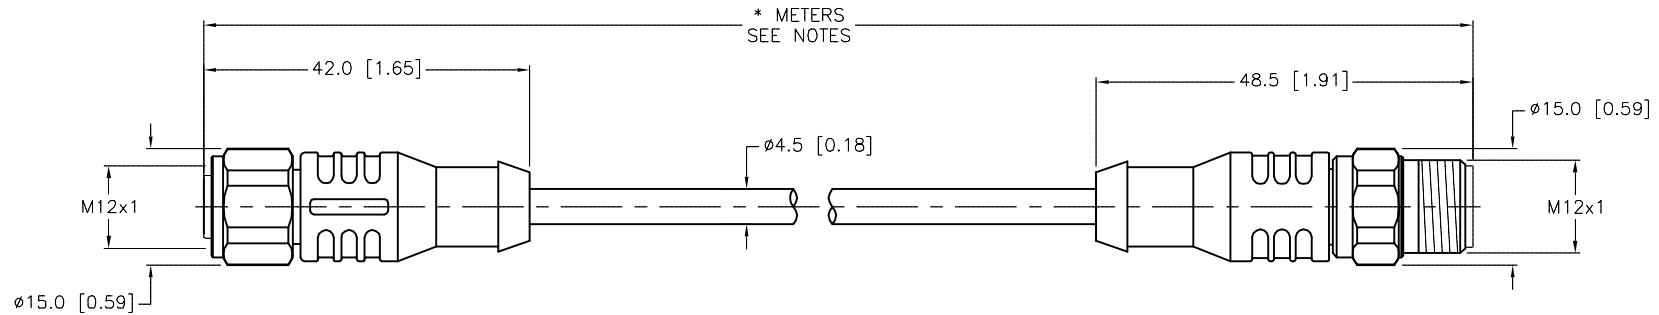NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

<div>50-69mm±3.0mm</div> <div>70-100mm±4.0mm</div> <div>OVER 100mm±5.0mm</div> <div>*UNLESS OTHERWISE SPECIFIED</div>					<div>RELATED DOCUMENTS</div> <div>1.</div> <div>2.</div> <div>3.</div> <div>4.</div>		<div>3RD ANGLE PROJECTION</div> <div></div>		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div><div>High Technology Sensors and Automation Controls</div></div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>					
<div>NOTES:</div> <div>1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.</div>					<div>MATERIAL</div> <div>SEE SPECIFICATIONS</div>		<div>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</div>		<div>DRFT</div> <div>RWC</div>		<div>DATE</div> <div>03/31/09</div>		<div>DESCRIPTION</div> <div>WD-RKCV 4.5T-*--RSCV 4.5T</div>	
									<div>APVD</div>		<div>SCALE</div> <div>1=1.0</div>			
									<div>FINISH</div> <div>SEE SPECIFICATIONS</div>		<div>CONTACT TURCK FOR MORE INFORMATION</div>		<div>UNIT OF MEASUREMENT</div> <div>MILLIMETER [INCH]</div>	
<div>DO NOT SCALE THIS DRAWING</div>		<div>FILE: 777024229</div>		<div>SHEET 1 OF 1</div>										
<div>E</div>	<div>UPDATE MATERIAL SPECIFICATIONS</div>			<div>NF</div>	<div>07/21/15</div>	<div>50672</div>								
<div>REV</div>	<div>DESCRIPTION</div>			<div>BY</div>	<div>DATE</div>	<div>ECO NO.</div>								