


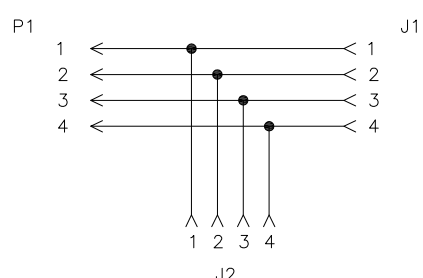
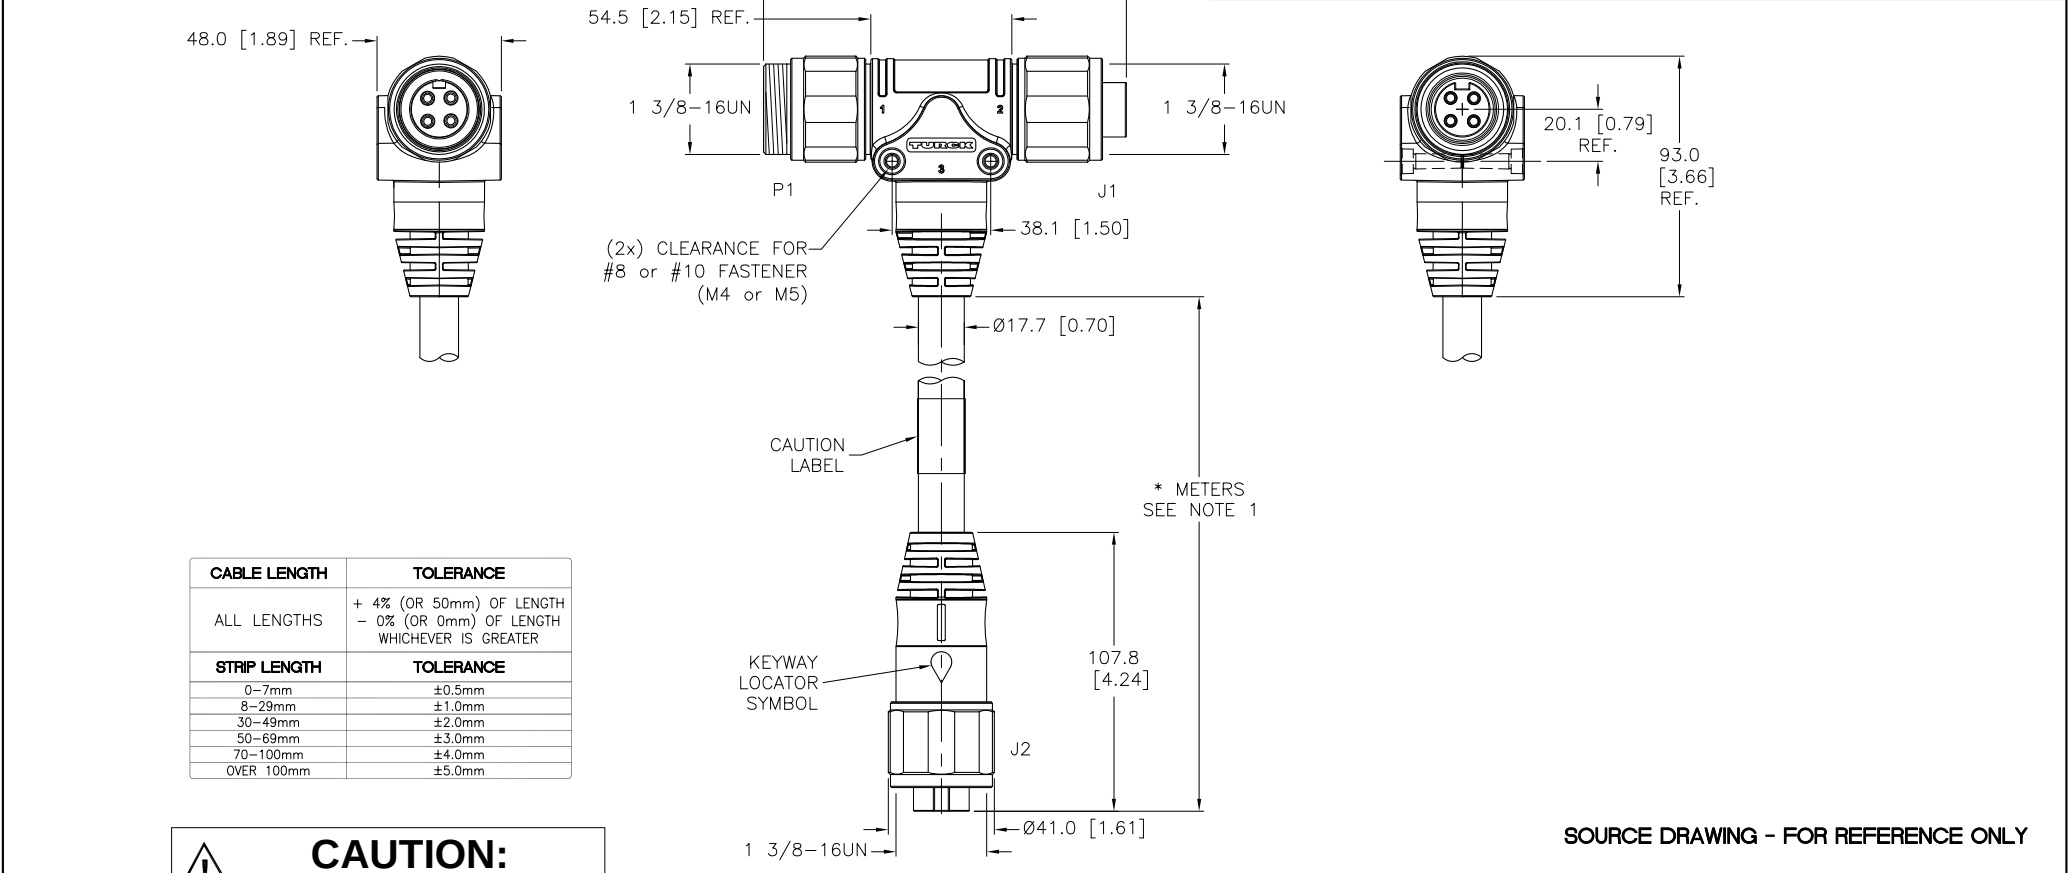


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 	 		CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK
			MOLDED MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	25 A COMBINED, 20 A DROP
			RATED VOLTAGE [V]	600 V
			CABLE JACKET MATERIAL/COLOR	TPE/BLACK
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBERS OF CONDUCTORS [AWG]	4x12 AWG
			TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K



NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					SOURCE DRAWING - FOR REFERENCE ONLY				
RELATED DOCUMENTS 1. 2. 3. 4.					3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		
MATERIAL					DRFT RDS		DATE 06/09/09		
SEE SPECIFICATIONS					DSGN		SCALE 1=3.0		
FINISH					UNIT OF MEASUREMENT		DESCRIPTION		
SEE SPECIFICATIONS					MILLIMETER [INCH]		GSDV/2GKDV 42-*		
					CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.		
					DO NOT SCALE THIS DRAWING		REV B		
B UPDATE CABLE JACKET MATERIAL CBM 10/19/11 36867 REV DESCRIPTION BY DATE ECO NO.					FILE: 777024290		SHEET 1 OF 1		