


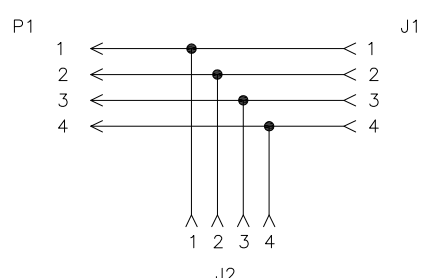
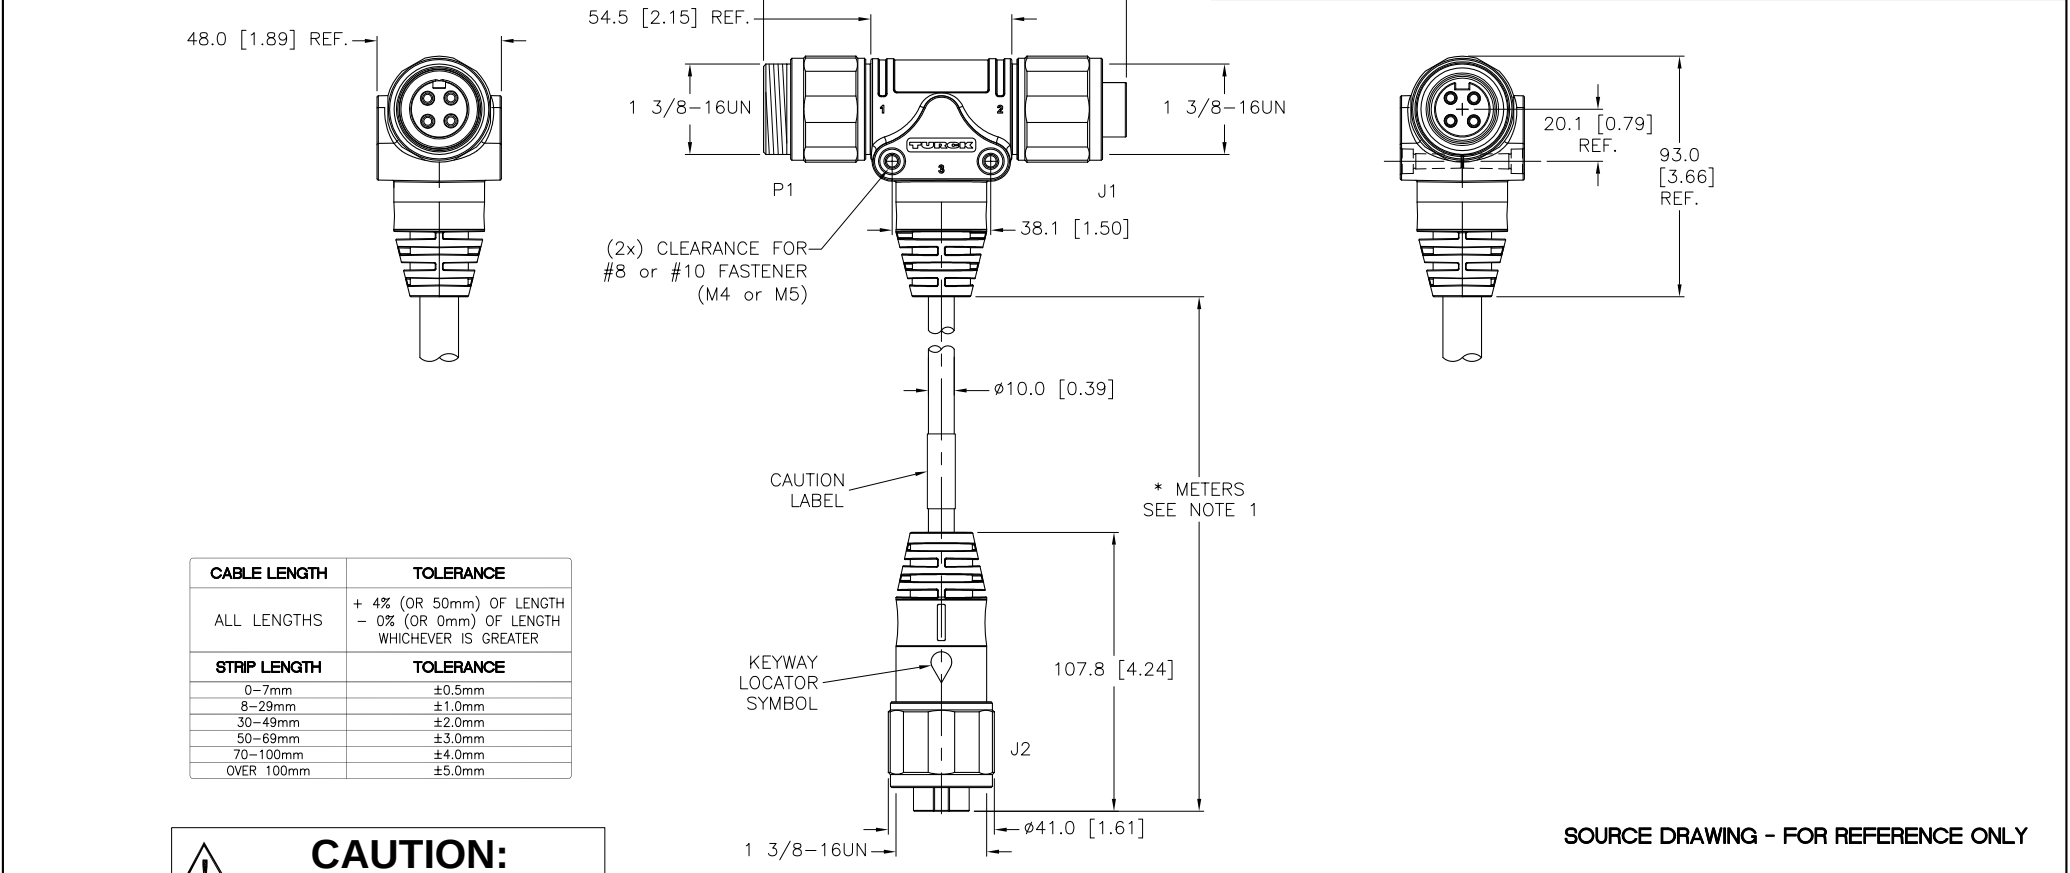


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 	 		CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK
			MOLDED MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	25 A COMBINED, 15 A DROP
			RATED VOLTAGE [V]	600 V
			CABLE JACKET MATERIAL/COLOR	PVC/BLACK
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBERS OF CONDUCTORS [AWG]	4x14 AWG
			TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K



NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS. 2. "/S4000" DESIGNATES TC-ER CABLE.				RELATED DOCUMENTS 1. 2. 3. 4. MATERIAL SEE SPECIFICATIONS FINISH SEE SPECIFICATIONS 3RD ANGLE PROJECTION  ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. DRFT RDS DSGN UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com TURCK INC High Technology Sensors and Automation Controls DATE 06/09/09 SCALE 1=3.0 DESCRIPTION GSDV/2GKDV 44-*/S4000 IDENTIFICATION NO. REV A
--	--	--	--	--