





MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS			
			CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK		
			MOLDED HEAD MATERIAL/COLOR	PVC/BLACK		
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD		
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL		
			RATED CURRENT [A]	30 A COMBINED, 18 A DROP		
			RATED VOLTAGE [V]	600 V		
			CABLE JACKET MATERIAL/COLOR	TPE/BLACK		
			CONDUCTOR INSULATION MATERIAL	PVC		
			NUMBERS OF CONDUCTORS [AWG]	3x14 AWG		
			TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)		
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K		

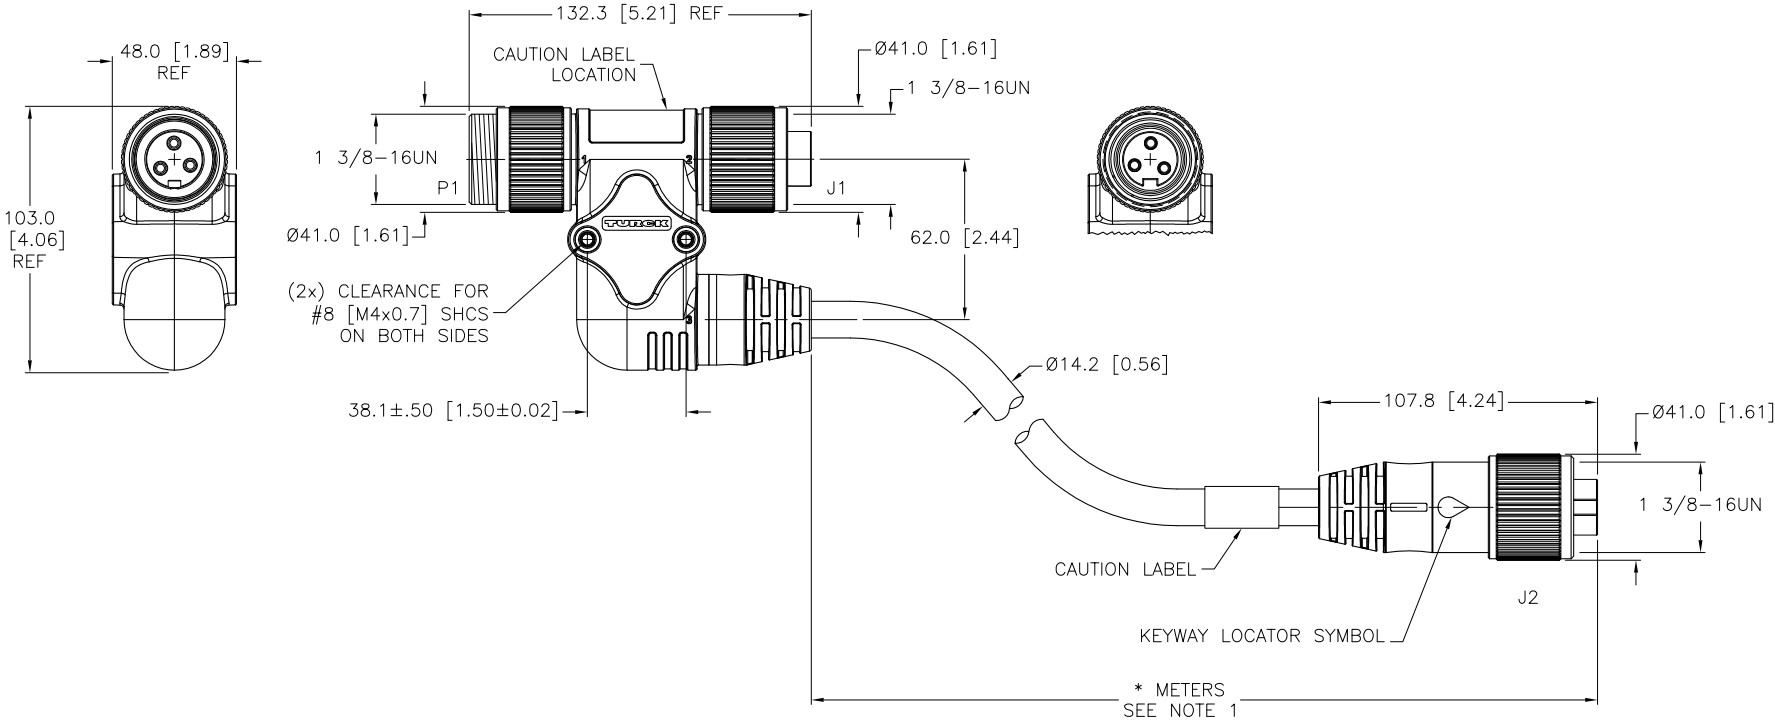

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

B	UPDATE CABLE JACKET MATERIAL	CBM	10/19/11	36867
REV	DESCRIPTION	BY	DATE	ECO NO.




CAUTION:

RISK OF ELECTRICAL SHOCK

DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.				DRFT *CK		DATE 09/28/10	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DSGN		SCALE 1=3.0	
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
FINISH		MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		SH-GSDM/2GKDM 34-*	
SEE SPECIFICATIONS				IDENTIFICATION NO.		REV	
				FILE: 777024404		B	
				SHEET 1 OF 1			