

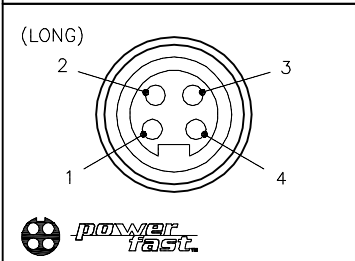
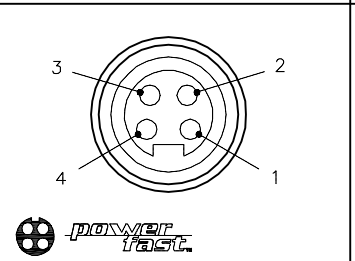
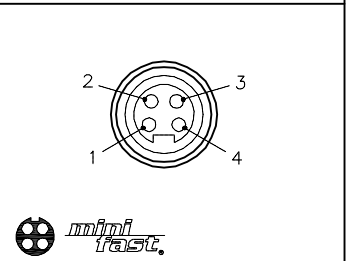


MALE END VIEW		FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	PVC
				MOLDED MATERIAL/COLOR	PVC/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	35 A COMBINED, 18 A DROP
				RATED VOLTAGE [V]	600 V
				CABLE JACKET MATERIAL/COLOR	PVC/BLACK
				CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
				NUMBERS OF CONDUCTORS [AWG]	4x14 AWG
				TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

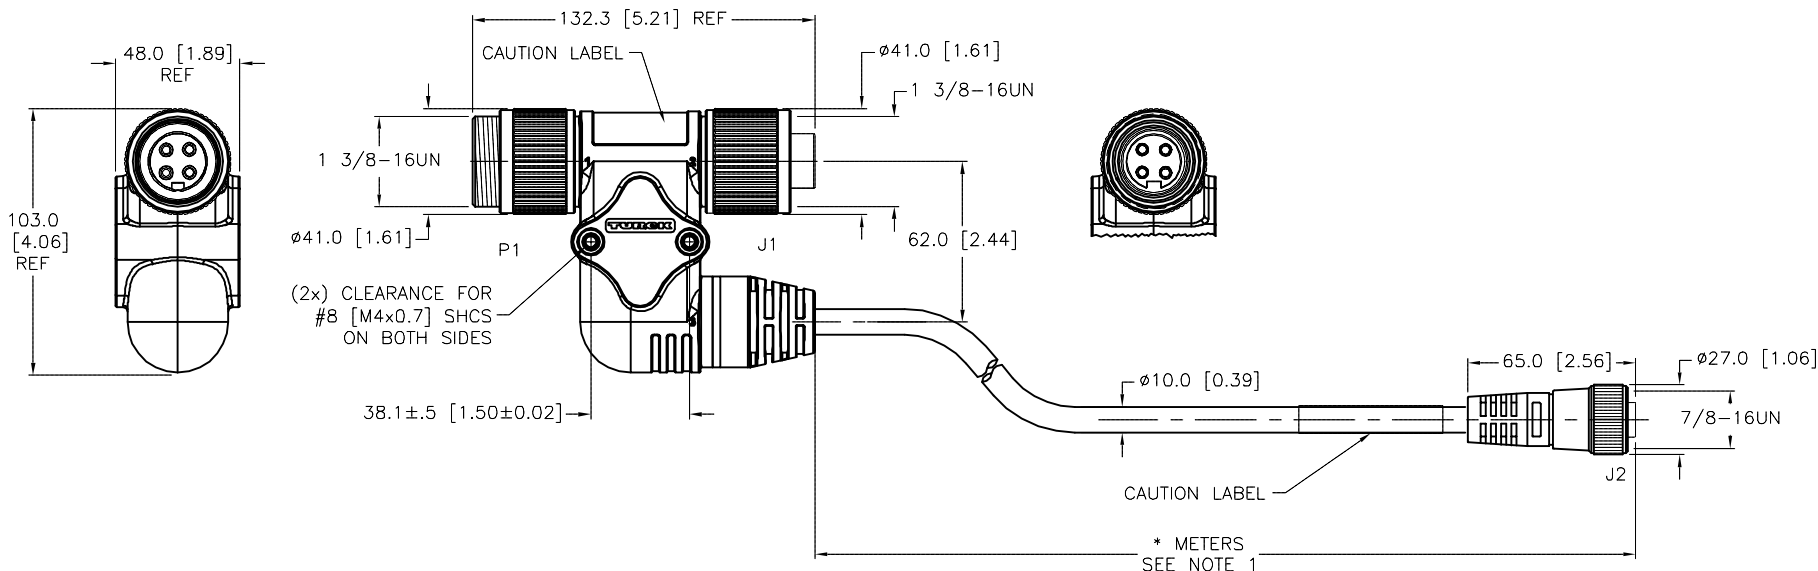

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

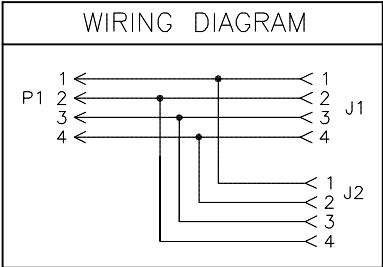

CAUTION:

RISK OF ELECTRICAL SHOCK

DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S4000" DESIGNATES TC-ER CABLE.

F	UPDATE RATED CURRENT	NF	04/26/19	69357
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	DRFT RDS	DATE 04/07/10	DESCRIPTION
MATERIAL	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD	SCALE 1=3.0	SH-GSDM/GKDM/RKM 44-*/S4000
FINISH	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT		IDENTIFICATION NO.
			MILLIMETER [INCH]		REV
			DO NOT SCALE THIS DRAWING		F
			FILE: 777024417		SHEET 1 OF 1