






MALE END VIEW	FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
 	 	  M16 connector	CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK (P1,J1), TPU/BLACK (J2)
			MOLDED HEAD MATERIAL/COLOR	PVC/BLACK (P1,J1), TPU/BLACK (J2)
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	25 A COMBINED, 15 A DROP
			RATED VOLTAGE [V]	600 V
			CABLE JACKET MATERIAL/COLOR	PVC/BLACK
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBERS OF CONDUCTORS [AWG]	4x14 AWG
			TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

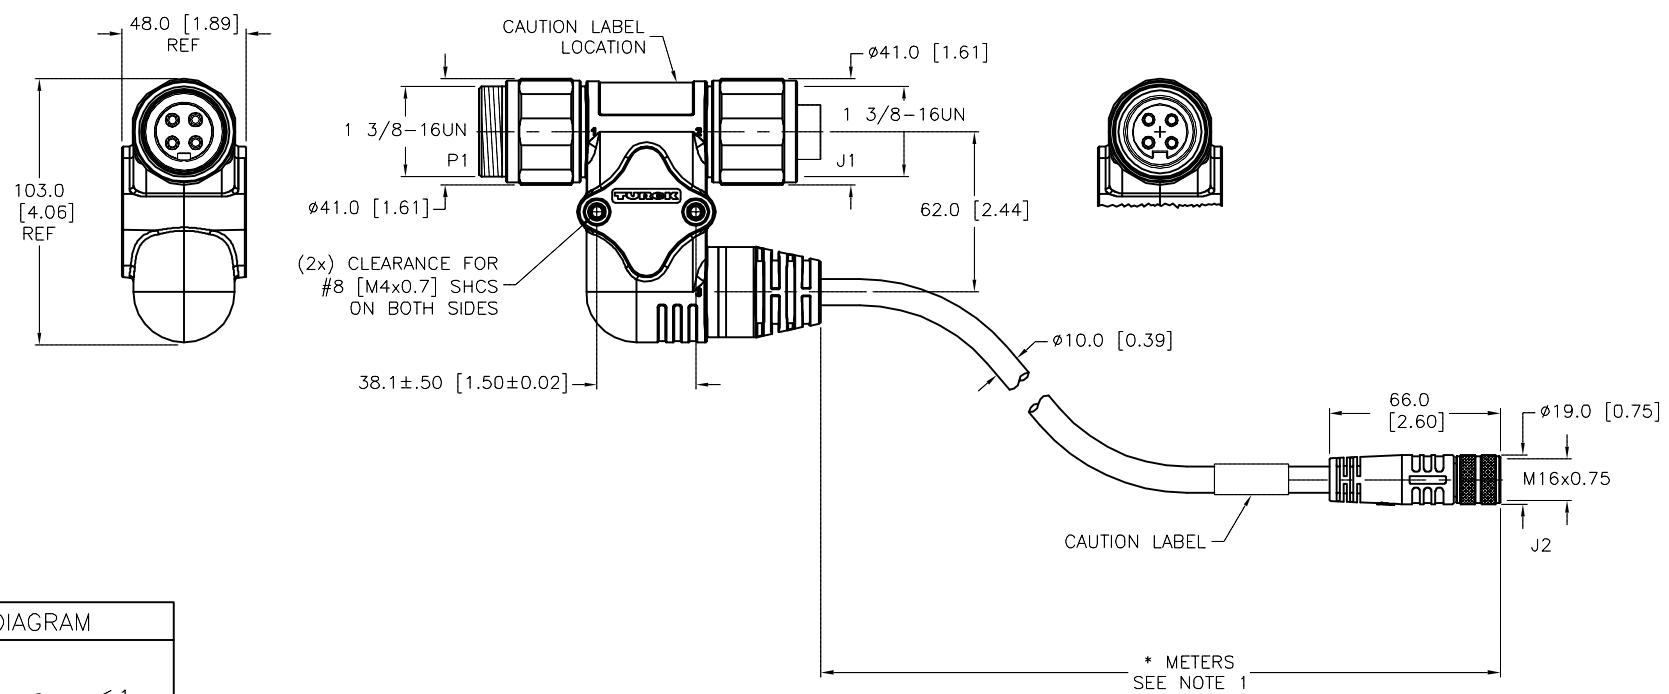

- NOTES:
- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S4000" DESIGNATES TC-ER CABLE.

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

 **CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

		<table><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr><tr><td colspan="2">* UNLESS OTHERWISE SPECIFIED</td></tr></table>	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm	* UNLESS OTHERWISE SPECIFIED		<table><tr><td colspan="2">RELATED DOCUMENTS</td></tr><tr><td>1.</td><td></td></tr><tr><td>2.</td><td></td></tr><tr><td>3.</td><td></td></tr><tr><td>4.</td><td></td></tr></table>		RELATED DOCUMENTS		1.		2.		3.		4.		<table><tr><td colspan="2">3RD ANGLE PROJECTION</td></tr><tr><td colspan="2"></td></tr></table>		3RD ANGLE PROJECTION				<table><tr><td colspan="2">THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</td></tr></table>		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<table><tr><td colspan="2"></td></tr><tr><td colspan="2">3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</td></tr></table>				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
0-7mm	±0.5mm																																											
8-29mm	±1.0mm																																											
30-49mm	±2.0mm																																											
50-69mm	±3.0mm																																											
70-100mm	±4.0mm																																											
OVER 100mm	±5.0mm																																											
* UNLESS OTHERWISE SPECIFIED																																												
RELATED DOCUMENTS																																												
1.																																												
2.																																												
3.																																												
4.																																												
3RD ANGLE PROJECTION																																												
THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.																																												
3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us																																												
NOTES:			<table><tr><td>MATERIAL</td><td rowspan="2">ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</td></tr><tr><td>SEE SPECIFICATIONS</td></tr></table>		MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	SEE SPECIFICATIONS	<table><tr><td>DRFT</td><td>*CK</td><td>DATE</td><td>10/01/10</td><td rowspan="2">DESCRIPTION SH-GSDV/GKDV/BKMOV 44-*/S4000</td></tr><tr><td>APVD</td><td></td><td>SCALE</td><td>1=3.0</td></tr></table>		DRFT	*CK	DATE	10/01/10	DESCRIPTION SH-GSDV/GKDV/BKMOV 44-*/S4000	APVD		SCALE	1=3.0																										
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY																																											
SEE SPECIFICATIONS																																												
DRFT	*CK	DATE	10/01/10	DESCRIPTION SH-GSDV/GKDV/BKMOV 44-*/S4000																																								
APVD		SCALE	1=3.0																																									
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.			<table><tr><td>FINISH</td><td rowspan="2">CONTACT TURCK FOR MORE INFORMATION</td></tr><tr><td>SEE SPECIFICATIONS</td></tr></table>		FINISH	CONTACT TURCK FOR MORE INFORMATION	SEE SPECIFICATIONS	<table><tr><td colspan="3">UNIT OF MEASUREMENT</td><td rowspan="2">IDENTIFICATION NO.</td><td rowspan="2">REV C</td></tr><tr><td colspan="3">MILLIMETER [INCH]</td></tr></table>		UNIT OF MEASUREMENT			IDENTIFICATION NO.	REV C	MILLIMETER [INCH]																													
FINISH	CONTACT TURCK FOR MORE INFORMATION																																											
SEE SPECIFICATIONS																																												
UNIT OF MEASUREMENT			IDENTIFICATION NO.	REV C																																								
MILLIMETER [INCH]																																												
2. "/S4000" DESIGNATES TC-ER CABLE.			<table><tr><td colspan="3">DO NOT SCALE THIS DRAWING</td><td rowspan="3">FILE: 777024443</td><td rowspan="3">SHEET 1 OF 1</td></tr><tr><td colspan="3"></td></tr><tr><td colspan="3"></td></tr></table>		DO NOT SCALE THIS DRAWING			FILE: 777024443	SHEET 1 OF 1																																			
DO NOT SCALE THIS DRAWING					FILE: 777024443	SHEET 1 OF 1																																						
C	UPDATED GRN CONDUCTOR TO GRN/YELLOW PER ECO	TV	08/15/17	60452																																								
REV	DESCRIPTION	BY	DATE	ECO NO.																																								