






MALE END VIEW	FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	PVC
			MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	25 A COMBINED, 15 A DROP
			RATED VOLTAGE [V]	600 V
			CABLE JACKET MATERIAL/COLOR	PVC/BLACK
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBERS OF CONDUCTORS [AWG]	4x14 AWG
			TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

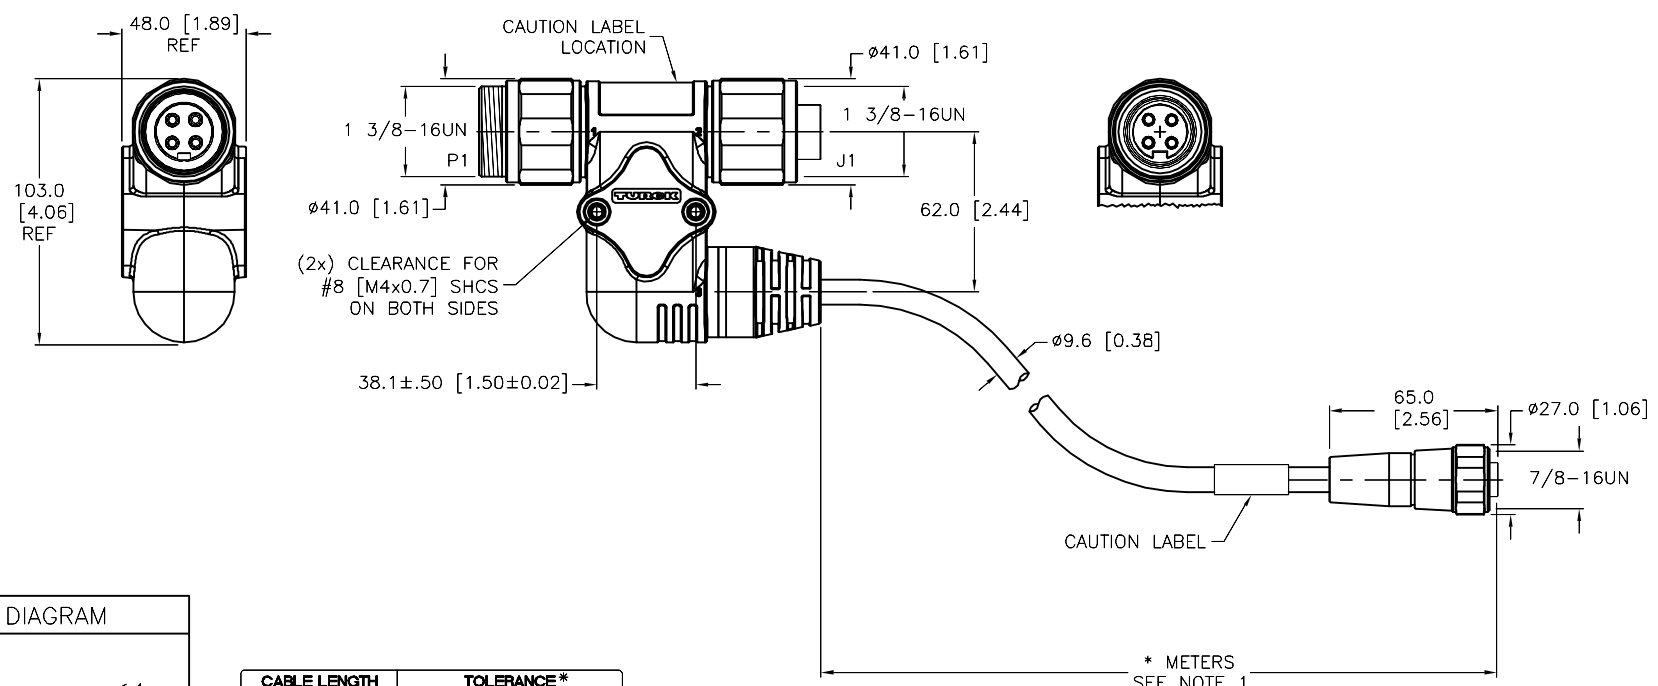

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

J2 OVER 100mm ±5.0mm *UNLESS OTHERWISE SPECIFIED					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
NOTES:					1. 2. 3. 4.				DRFT *CK		DATE 10/04/10		DESCRIPTION	
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=3.0		SH-GSDV/GKDV/RKV 44-*/S4000	
2. "/S4000" DESIGNATES TC-ER CABLE.					SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION				UNIT OF MEASUREMENT		IDENTIFICATION NO.	
					FINISH						MILLIMETER [INCH]		REV	
					SEE SPECIFICATIONS						DO NOT SCALE THIS DRAWING		D	
D UPDATE CONTACT MATERIAL/PLATING CALLOUT					RDS 12/14/16		57964							
REV DESCRIPTION					BY		DATE		ECO NO.				FILE: 777024447	
													SHEET 1 OF 1	