





MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL/COLOR	PVC/BLACK
			MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
			CONTACT MATERIAL/PLATING	BRASS or COPPER/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	28.0 A
			RATED VOLTAGE [V]	600 V
			CABLE JACKET MATERIAL/COLOR	TPE/BLACK
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBERS OF CONDUCTORS [AWG]	4x10 AWG
			TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

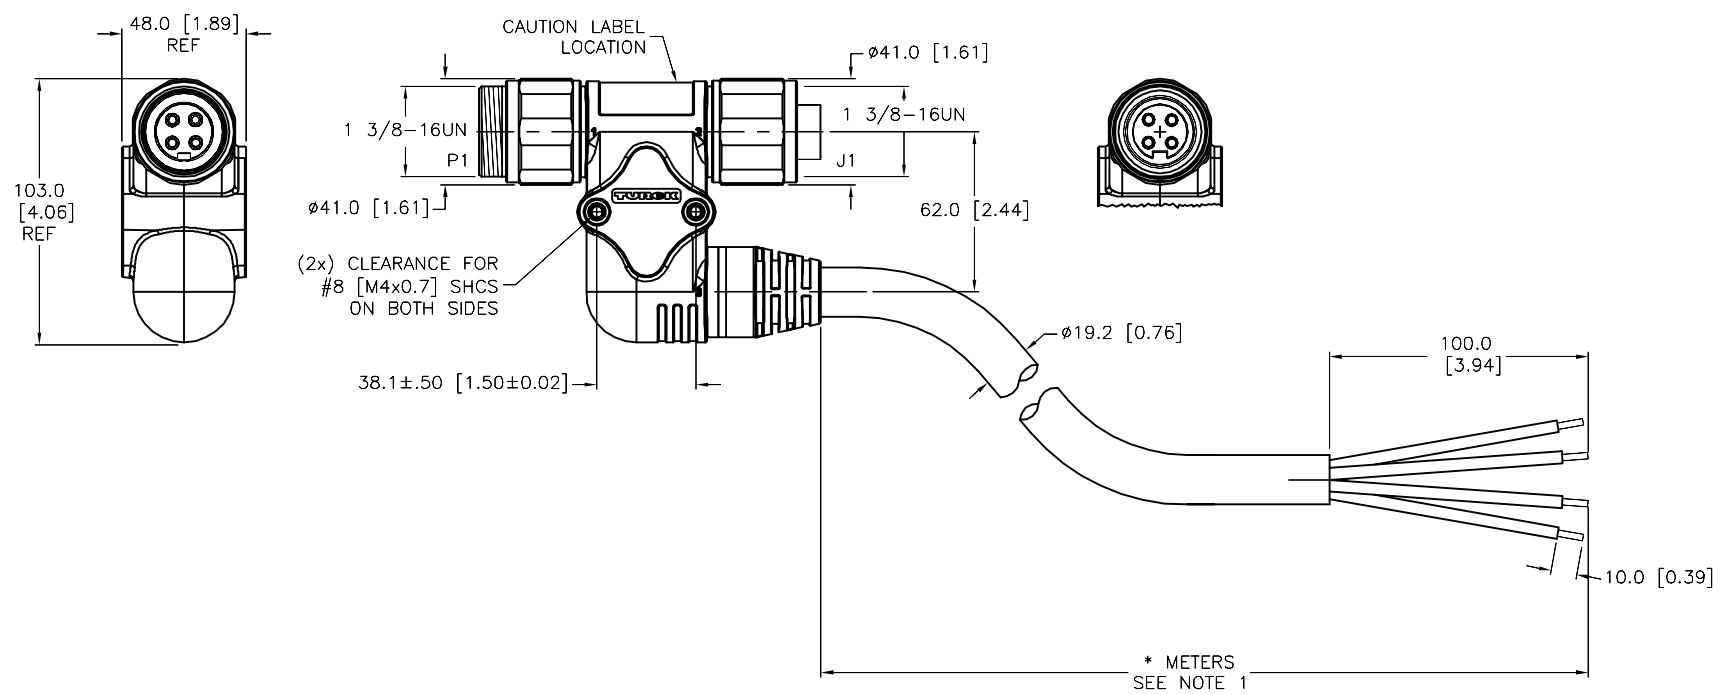

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

**CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

E	UPDATE CONDUCTOR COLOR	NF	10/04/17	60845
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
1.			
2.			
3.			
4.			
MATERIAL	SEE SPECIFICATIONS	DRFT *CK	DATE 10/04/10
FINISH	SEE SPECIFICATIONS	APVD	SCALE 1=3.0
		UNIT OF MEASUREMENT MILLIMETER [INCH]	
		DESCRIPTION SH-GSDV/GKDV/T40-*	
		IDENTIFICATION NO.	
		REV E	
		DO NOT SCALE THIS DRAWING	
		FILE: 777024454	
		SHEET 1 OF 1	