






MALE END VIEW		FEMALE END VIEW (J1)	FEMALE END VIEW (J2)	SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	PVC
				MOLDED MATERIAL/COLOR	PVC/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/FINISH	ALUMINUM/CLEAR ANODIZED (P1,J1)
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (J2)
				RATED CURRENT [A]	30 A COMBINED, 15 A DROP
				RATED VOLTAGE [V]	600 V
				CABLE JACKET MATERIAL/COLOR	TPE/BLACK
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBERS OF CONDUCTORS [AWG]	3x14 AWG
				TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

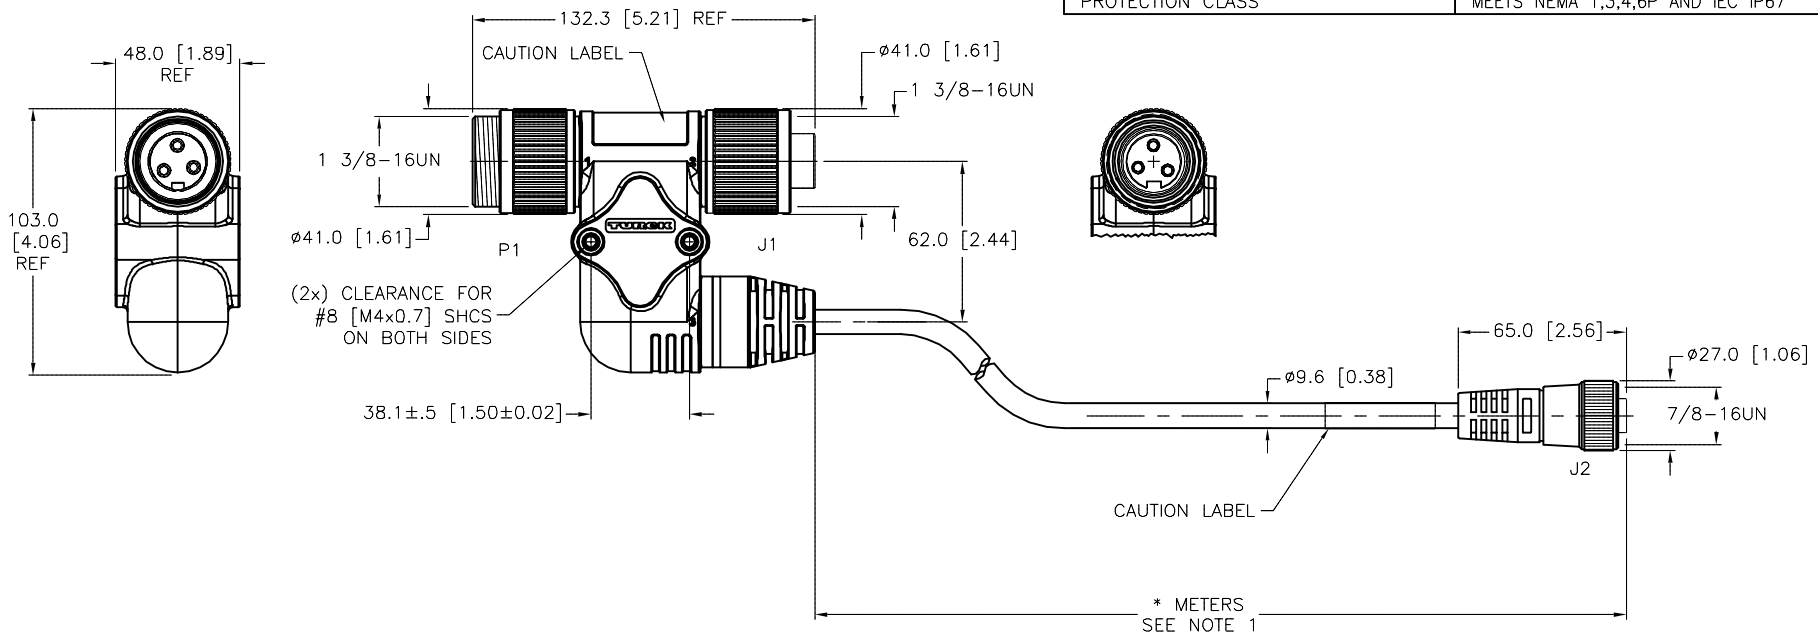


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

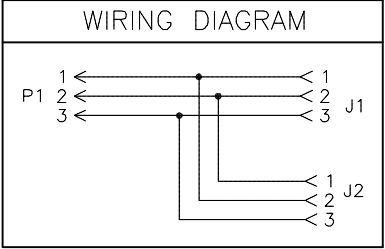

**CAUTION:**
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					1. MATERIAL				DRFT RDS		DATE 04/07/10	
2. "/S4000" DESIGNATES TC-ER CABLE.					SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=3.0	
					FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
					SEE SPECIFICATIONS				MILLIMETER [INCH]		SH-GSDA/GKDA/RKM 34-*/S4000	
									DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
											REV	
											D	
											FILE: 777024475	
											SHEET 1 OF 1	