


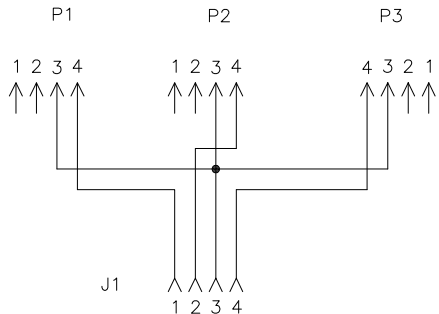


FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS		
			CONTACT CARRIER MATERIAL	TPU OR NYLON	
 <i>europa fast.</i>			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	
			CONTACT MATERIAL/PLATING	BRASS/GOLD	
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	
			RATED CURRENT [A]	4.0 A	
			RATED VOLTAGE [V]	250 V	
			OUTER JACKET MATERIAL/COLOR	PVC/YELLOW (J1), PVC/BLACK (P1-P3)	
			CONDUCTOR INSULATION MATERIAL	PVC	
			NUMBER OF CONDUCTOR [AWG]	4x22 AWG (J1), 3x24 AWG (P1-P3)	
 <i>europa fast.</i>			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	

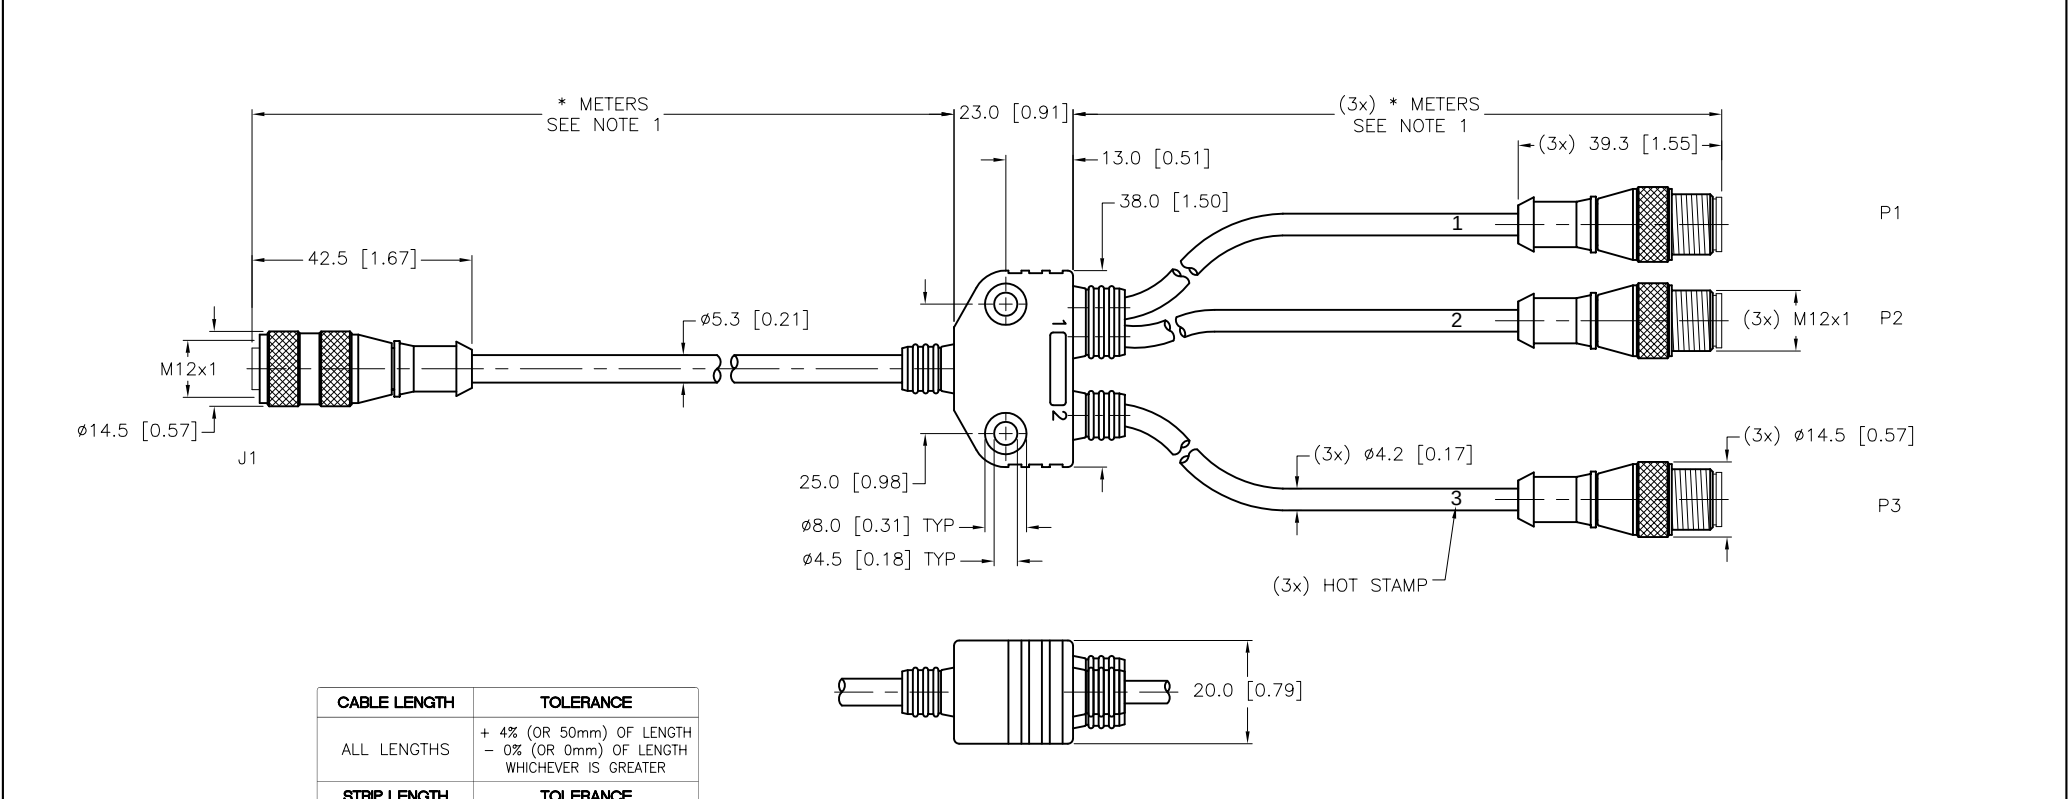

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/CS12347" DESIGNATES CUSTOM WIRED SPLITTER.

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "＊" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/CS12347" DESIGNATES CUSTOM WIRED SPLITTER.

76= 100mm

OVER 100mm

±4.0mm

±5.0mm

RELATED DOCUMENTS

1.

2.

3.

4.


MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT

RWC

DATE

04/01/09

APVD

SCALE

1=1.5

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE

MINNEAPOLIS, MN 55441

1-800-544-7769

(763) 553-7300

(763) 553-0708 fax

turck.com

DESCRIPTION

V4RK-*/RS 4.2T-*/*/*/CS12347

IDENTIFICATION NO.

REV

E

FILE: 777024494

SHEET 1 OF 1