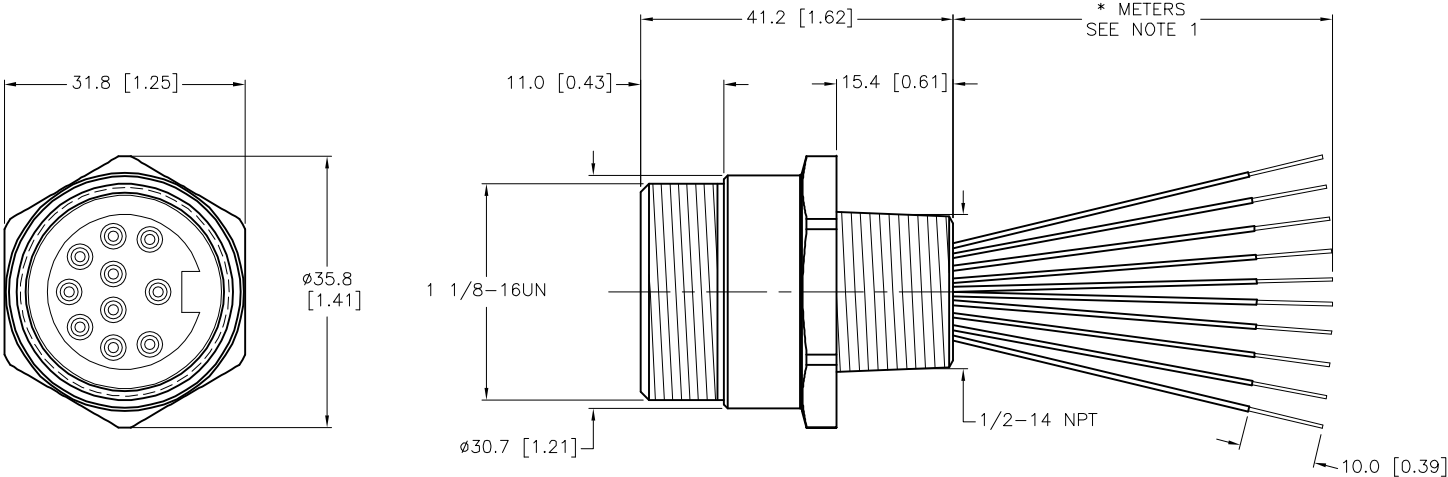




MALE END VIEW		SPECIFICATIONS	
	1 = ORANGE	CONTACT CARRIER MATERIAL	TPU
	2 = BLUE	CONTACT MATERIAL/PLATING	BRASS/GOLD
	3 = WHITE/BLACK	HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
	4 = RED/BLACK	RATED CURRENT [A]	4.0 A
	5 = GREEN/BLACK	RATED VOLTAGE [V]	300 V
	6 = ORANGE/BLACK	CONDUCTOR INSULATION MATERIAL	PVC
	7 = RED	NUMBERS OF CONDUCTORS [AWG]	10x22 AWG
	8 = GREEN/YELLOW	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
	9 = BLACK	PROTECTION CLASS	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K
	10 = WHITE		
			



CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

- NOTES:
- "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S849" DESIGNATES 22 AWG CONDUCTORS.

I	UPDATE SPECS	NF	04/30/24	80136
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	 <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div>		
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT RWC	DATE 03/20/09	DESCRIPTION RSFV 106-*M/14.5/NPT/S849	
		APVD	SCALE 1=1.0		
FINISH SEE SPECIFICATIONS			UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. <div>REV </div>
		FILE: 777024495			SHEET 1 OF 1

SOURCE DRAWING - FOR REFERENCE ONLY