



FEMALE END VIEW



1 = WHITE
2 = BLACK
3 = DRAIN
4 = GREEN/YELLOW



SPECIFICATIONS	
CONTACT CARRIER MATERIAL	PVC
MOLDED HEAD MATERIAL/COLOR	PVC/ALPINE GREEN
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	300 V
OUTER JACKET MATERIAL/COLOR	PVC/PLUM
CONDUCTOR INSULATION MATERIAL	PVC
CONDUCTORS	3x16 AWG
DRAIN/SHIELD	18 AWG/ALUMINUM-POLYESTER FOIL
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
CONDUCTOR ARRANGEMENT	1 SHIELDED TWISTED PAIR, 1 GROUND, 1 DRAIN
CABLE RATINGS	UL: ITC/PLTC/AWM, 105°C, 300 V CSA: CMG/AWM, 105°C, 300 V

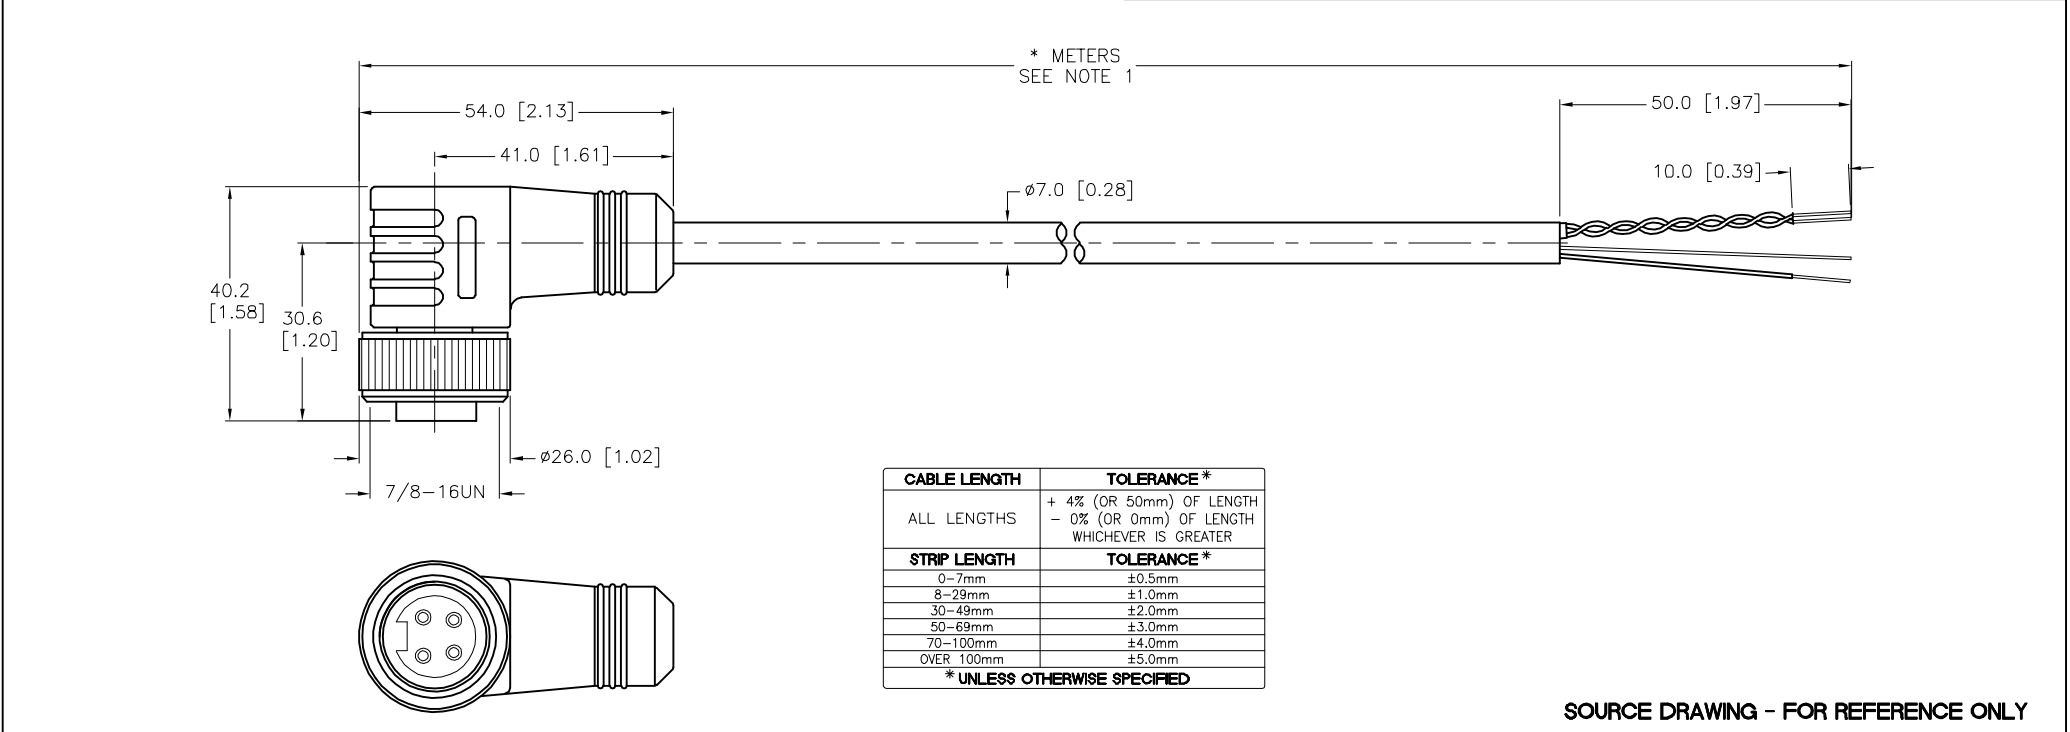

NOTES:


1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S3001" DESIGNATES ALPINE GREEN MOLDED PLUG BODY MATERIAL.
3. "/CS10455" DESIGNATES PVC OVERMOLD MATERIAL.

E	UPDATE CONDUCTOR COLOR	NF	01/23/18	60912
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RDS
APVD

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us



DATE 02/13/09
SCALE 1=1.3

DESCRIPTION
WKV 45-098-*M/S3001/CS10455

UNIT OF MEASUREMENT
MILLIMETER [INCH]

IDENTIFICATION NO.

CONTACT TURCK FOR MORE INFORMATION

DO NOT SCALE THIS DRAWING

REV
E

FILE: 777024620

SHEET 1 OF 1